

Low Noise Amplifier

WR-12/60-90GHz /4.5dB NF/35dB Gain

Model: TMLA-060090-3545-12-N

TMLA-060090-3545-12-N is a E-Band low noise amplifier with small signal gain of 35 dB and a nominal noise figure of 4.5 dB across the frequency range of 60 to 90 GHz. The DC power requirement for the amplifier is +5 VDC/300 mA. The input and output port configuration offers an inline structure with WR-12 waveguides and UG-387/U-M anti-cocking flanges.

Features:

- Ultra Wide Band:60-90 GHz
- Gain: 35dB Min
- Noise Figure: 4.5dB Typ
- Unconditional stability

Applications:

- Passive Imaging
- 5G Systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	60		90	GHz
Gain	35			dB
Noise Figure		4.5		dB
Output P1dB		17		dBm
Input VSWR		2		:1
Output VSWR		2		:1
DC Voltage		5		V DC
DC power supply		300		mA

Mechanical Specifications:


Parameter	Value	Units
Input Connector	WR-12/ UG-387/U	
Output Connector	WR-12/ UG-387/U	
Power Supply Pin	Solder Pin	
Size	40*30*22	mm

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+8 V
RF Input Power	+15 dBm
ESD sensitivity (HBM)	Class 0, passed 150V

Outline Drawing:

Unit:mm

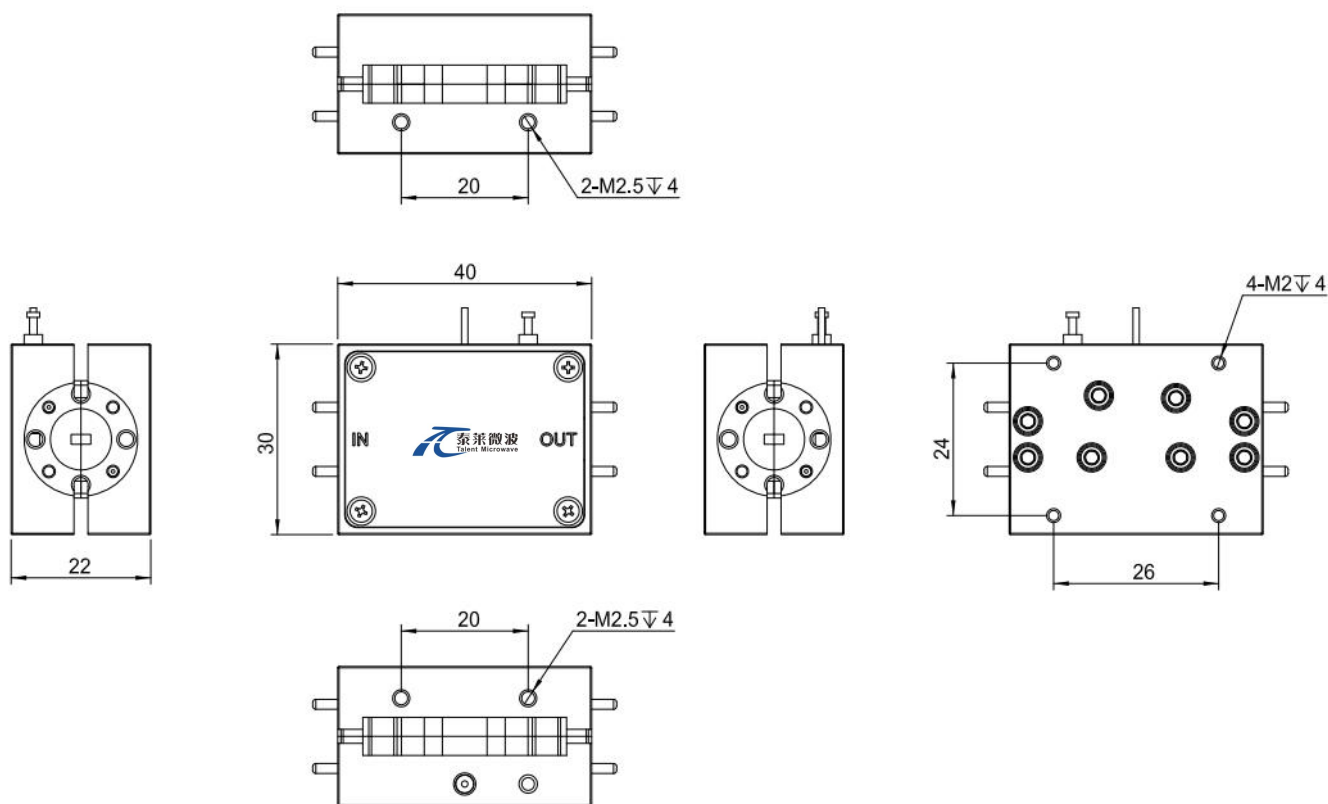


Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+65	°C
Non-operating Temperature	-45		+85	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Base Number	Description	Revision
TMLA-060090-3545-12-N	Low Noise Amplifier,60-90GHz, Noise Figure:4.5dB, Gain:35dB,+5V DC,WR-12	Rev.1.1


Typical Performance Data:

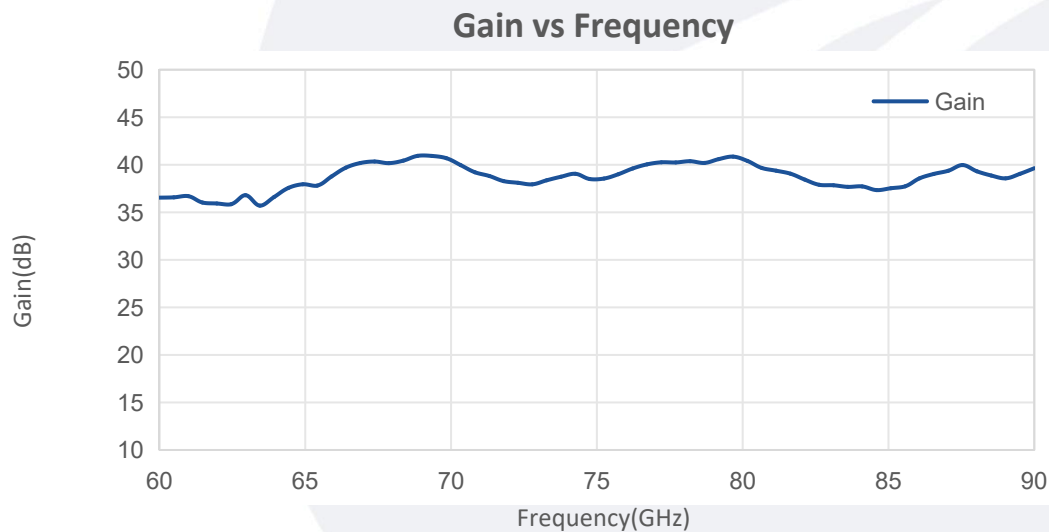


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

Noise Figure vs Frequency

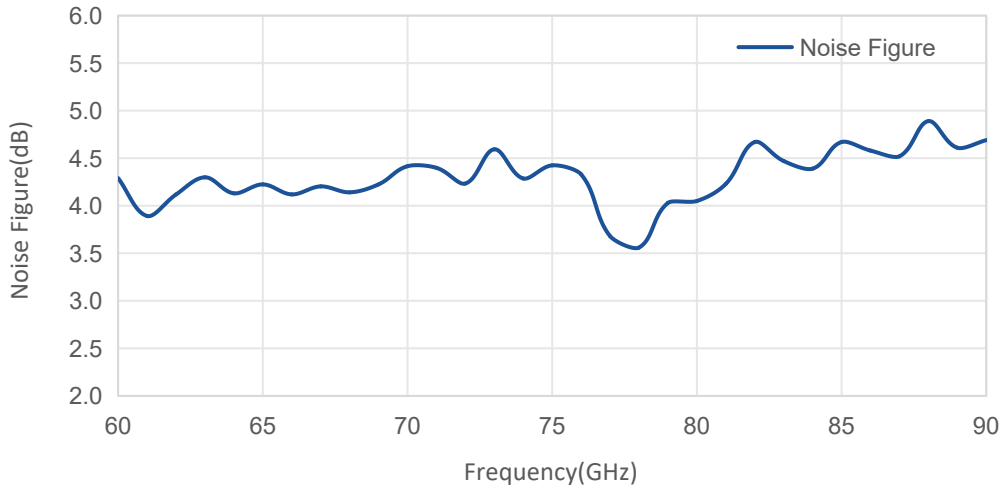

VSWR vs Frequency

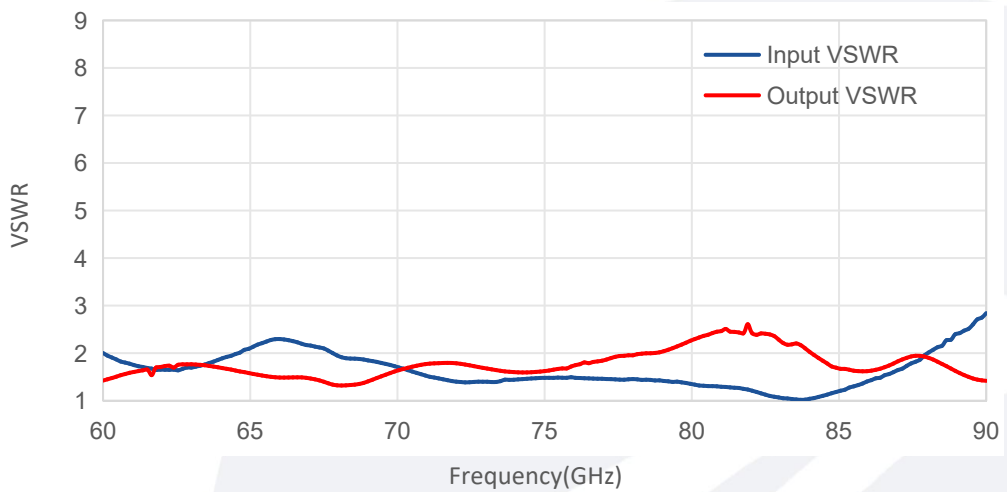

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.