

Low Noise Amplifier

WR-10/75-110GHz/4dB NF/35dB Gain

Model: TMLA-075110-3540-10

TMLA-075110-3540-10 is a E-Band low noise amplifier with a minimum small signal gain of 35 dB and a nominal noise figure of 4 dB across the frequency range of 75 to 110 GHz. The DC power requirement for the amplifier is +12 VDC /60 mA. The input and output port configuration offers an inline structure with WR-10 waveguides and UG-387/U-M anti-cocking flanges.

Features:

- Frequency range: 75-110GHz
- Gain: 35dB Min
- Noise Figure: 4dB Typ
- Unconditional stability

Applications:

- Passive Imaging
- 5G Systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	75		110	GHz
Small Signal Gain	35	39		dB
Noise Figure		4		dB
Output P1dB		0		dBm
Input VSWR		2.5		:1
Output VSWR		2.2		:1
DC Voltage		12		V DC
DC Supply Current		60		mA

Mechanical Specifications:

Parameter	Value	Units
Input Connector	WR-10/ UG-387/U	
Output Connector	WR-10/ UG-387/U	
Power Supply Pin	Solder Pin	
Size	39*30*23	mm


Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+13 V
RF Input Power	0 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

Regulatory Compliance:

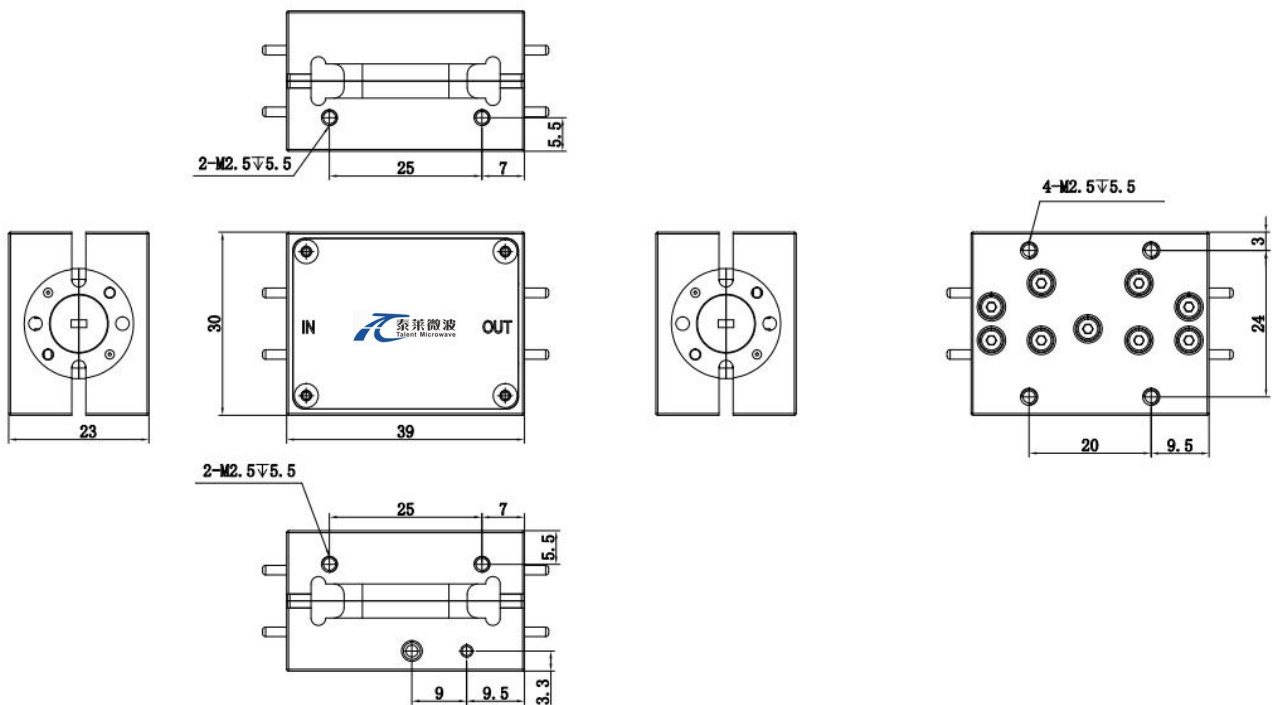

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.


Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+65	°C
Non-operating Temperature	-45		+85	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Base Number	Description	Revision
TMLA-075110-3540-10	Low Noise Amplifier,75-110GHz, Noise Figure:4.0dB, Gain:35dB,+12V DC,WR-10	Rev.1.1


Typical Performance Data:

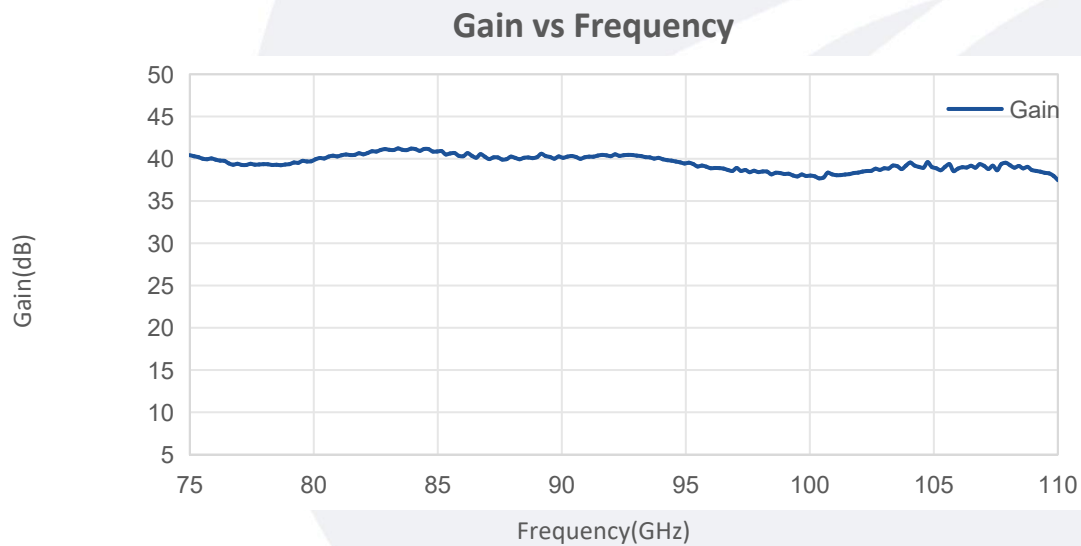


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

Noise Figure vs Frequency

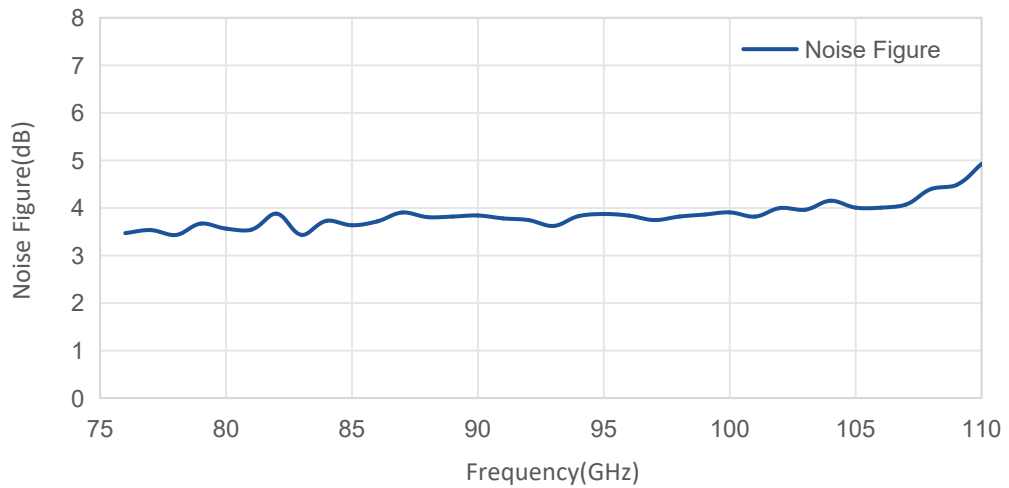

Input VSWR vs Frequency

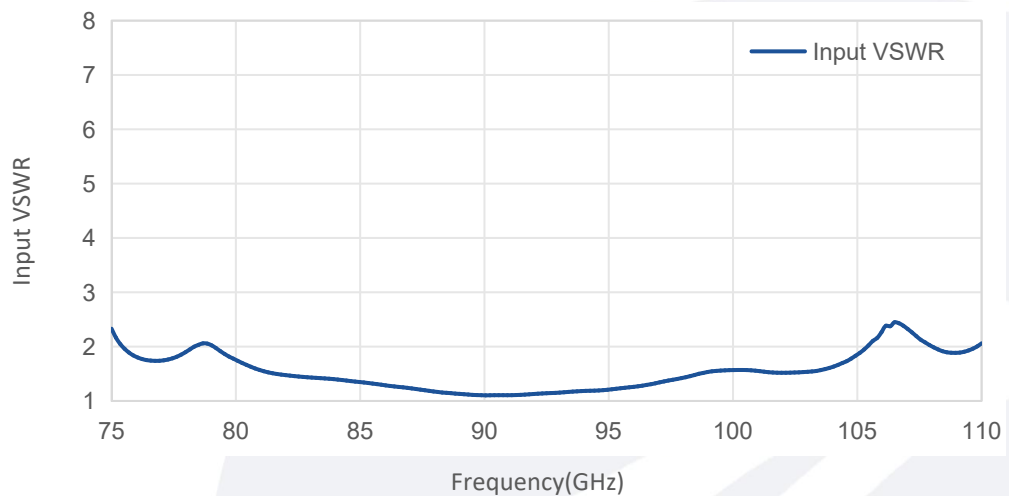

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.