

Coaxial Band-pass Filter

6.97-7.03 GHz/SMA Female

Model: TLBF-7G-30M-E

TLBF-7G-30M-E is a coaxial band-pass filter with a passband frequency from 6.97 to 7.03 GHz and a rejection frequencies from 6.8 GHz to 7.2 GHz. The maximum insertion loss of the filter is 2.0 dB and the typical rejection is 50 dB.

Features:

- Passband Frequency Range 6.97 to 7.03 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts
- Field Replaceable RF Connectors

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	6.97		7.03	GHz
Band Width			0.06	GHz
Passband Insertion Loss			2.0	dB
Pass Band Ripple			1.8	dB
Rejection	>50dB@F0+-200Mhz			dB
Power Handling			15	W
VSWR			1.5	:1
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Connectors	SMA Female	

Outline Drawing:

Unit:mm

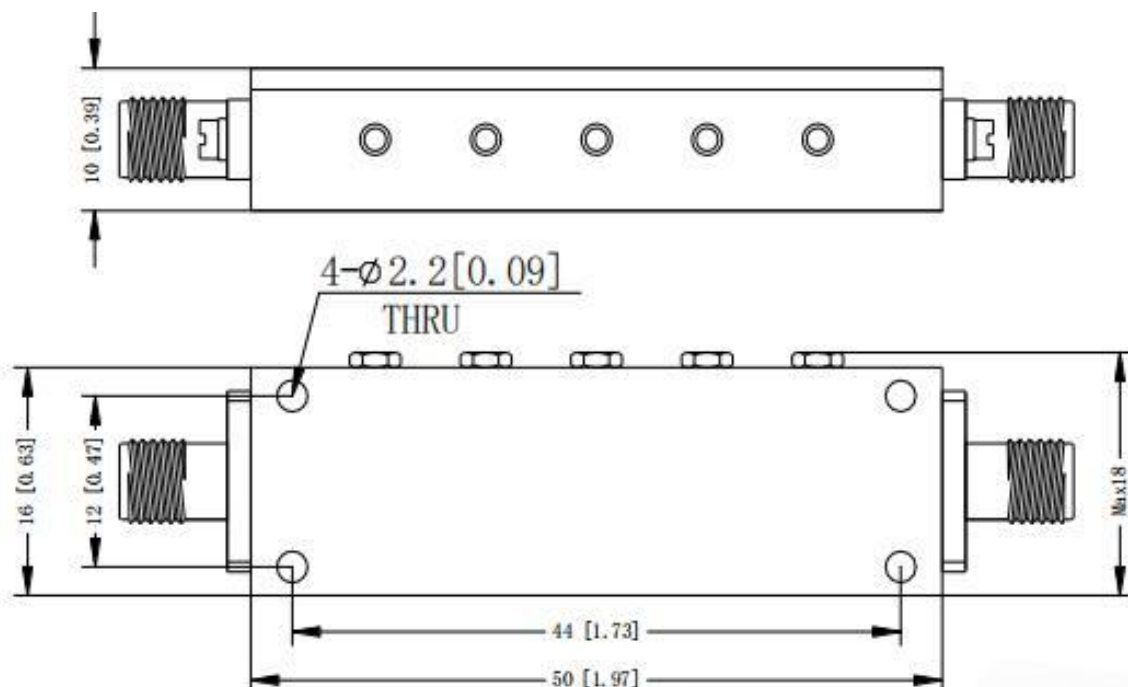


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-7G-30M-E	Coaxial Band-pass Filter, Passband frequency range: 6.97-7.03GHz, Passband Insertion Loss: 2.0dB, SMA Female	Rev.1.0

Typical Performance Data:

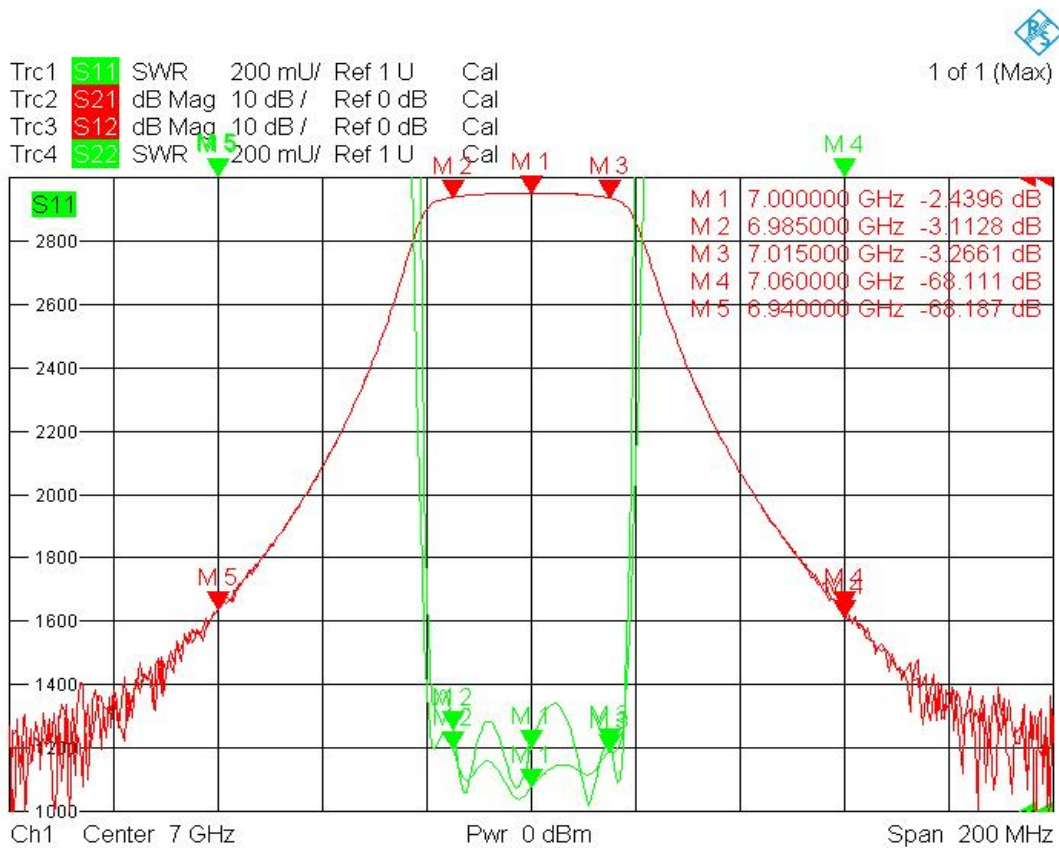

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.