


TalentMWW

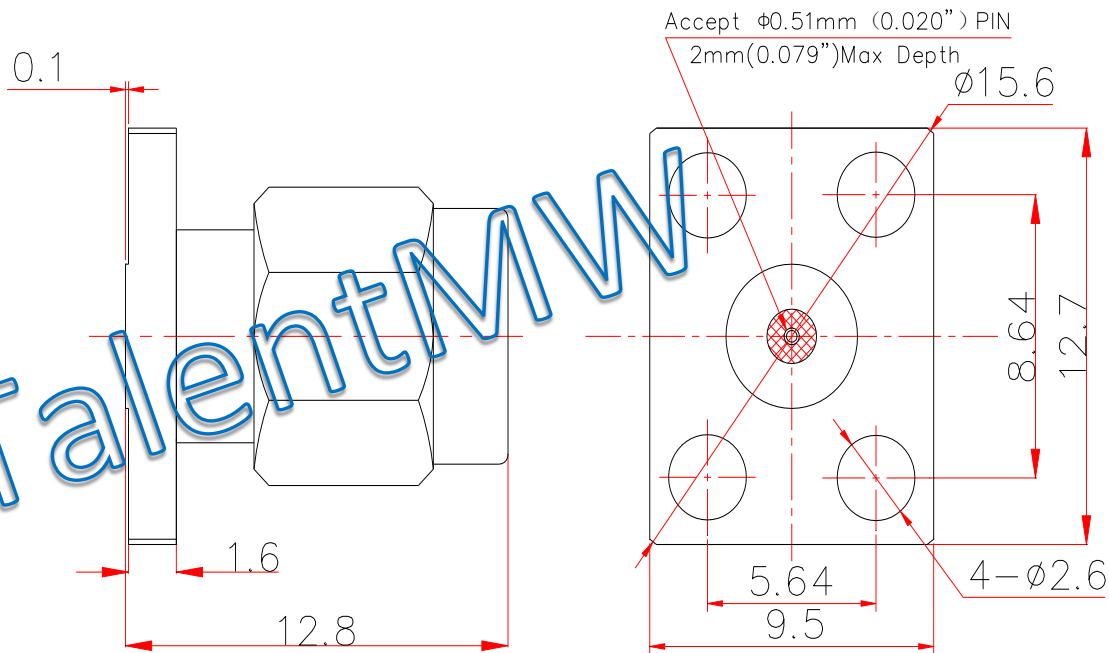

**Electrical & Environmental Characteristics**

Impedance	50 Ohm
Insulation Resistance	5000 M $\Omega$
Operating Frequency	26.5GHz
Dielectric Withstanding Voltage	1000 V
VSWR	1.15
Insertion Loss	0.05* $\sqrt{f\_GHz}$
Operating Temperature	-55~+165 $^{\circ}$ C

**Material & Coat-Plating**

Inner Conductor	Beryllium Copper, Gold
Dielectric	PTFE
Body	Stainless Steel, Passivated
Coupling Nut	N/A

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN	Suzhou Talent Microwave, Inc				
		CHK					
Unit mm	TOLERANCES UNLESS OTHERWISE SPECIFIED 0 PLC $\pm$ 0.25 1 PLC $\pm$ 0.15 2 PLC $\pm$ 0.12 3 PLC $\pm$ 3 PLC $\pm$ ANGLES $\pm$ 1 $^{\circ}$	APVD	Product Mode  <b>SMA-JFD80320</b> SMA Male Flange Connector				
		PRODUCT SPEC					
		APPLICATION SPEC					
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT	SIZE A4	GAGE CODE 0T8L4	DRAWING NO		
		CUSTOMER DRAWING		SCALE 4: 1	SCALE 4: 1	SHEET 1 OF 1	RVE 1