

Active Frequency Multiplier

X3/8-15GHz/5dBm Output Power

Model: TLAM-0815-0305-S

TLAM-0815-0305-S is an active X3 frequency multiplier. The multiplier has an input frequency of 2.66 to 5 GHz with a typical input power of 5 dBm and an output frequency of 8 to 15 GHz with a minimum output power of +5 dBm. The DC power requirement for the multiplier is +12V DC/120 mA. The input and output port configuration is female SMA connector.

Features:

- Output Frequency: 8-15GHz
- Output Power: 5dBm Min
- Low power consumption
- 50 Ohm Matched Input / Output

Applications:

- Synthesizers
- Local oscillators

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Output Frequency	8		15	GHz
Output Power	5			dBm
Input Frequency	2.66		5	GHz
Input Power	0	5	10	dBm
Multiply Factor		3		
DC Voltage	8	12	15	V
DC Supply Current		120		mA

Mechanical Specifications:


Parameter	Value	Units
Output Connector	SMA Female	
Input Connector	SMA Female	
DC Bias	Solder Pin	
Size	44.8*29.2*11	mm

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+15 V
RF Input Power	+10 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

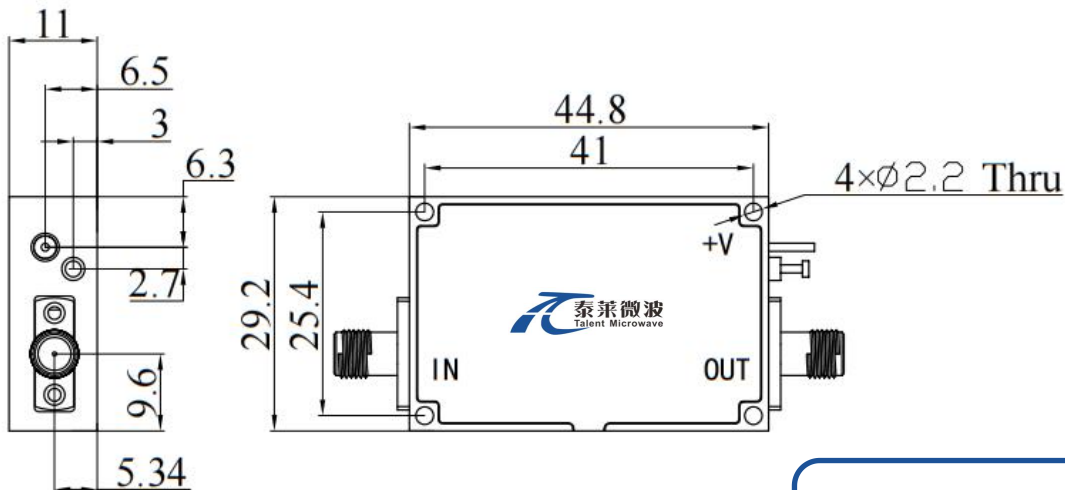

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-45		+85	°C
Non-operating Temperature	-55		+125	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Base Number	Description	Revision
TLAM-0815-0305-S	Active Multiplier,X3, 8-15GHz , +5dBm Output Power,SMA Female	Rev.1.0