

Coaxial Band-pass Filter

2.395-2.795GHz/ SMA Female

Model: TLBF-2595M-400M-E

TLBF-2595M-400M-E is a coaxial band-pass filter with a passband frequency from 2.395 to 2.795GHz and a rejection frequencies from 0 to 1.695GHz and at 3.495GHz. The nominal insertion loss of the filter is 1.0dB and the typical rejection is 40 dB.

Features:

- Passband Frequency Range 2.395 to 2.795GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations


电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	2.395		2.795	GHz
中心插损 Insertion Loss (f ₀)			1.0	dB
带内纹波 Pass Band Ripple			0.8	dB
带外抑制 Rejection	>40dB@DC-1695MHz 3495MHz			dB
耐受功率 Power Handling			50	W
输入驻波 Input VSWR			1.6	:1
输出驻波 Output VSWR			1.6	:1
阻抗 Impedance	50			Ohms

环境和机械特性 Envirionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temperature	-40 To +70	℃
存储温度 Storage Temperature	-40 to +70	℃
接口 Connectors	SMA Female	

外形图Outline Drawing: Unit:mm;

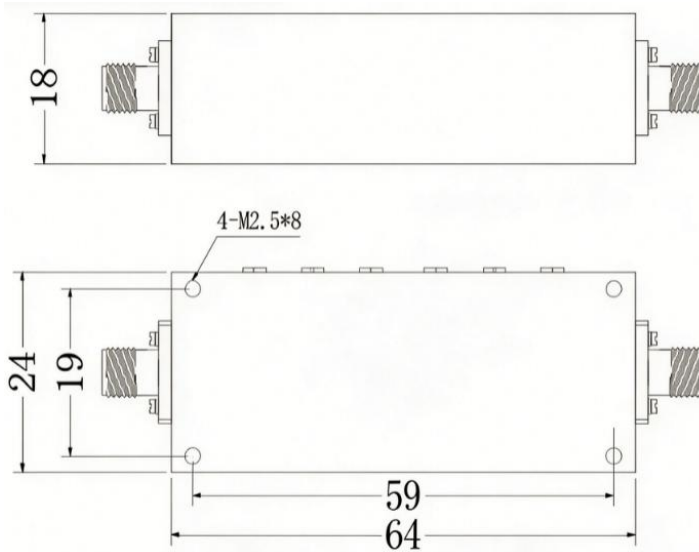


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号Revision
TLBF-2595M-400M-E	Coaxial Band-pass Filter, Passband frequency range: 2.395 to 2.795GHz, Insertion Loss(fo): 1.0dB, SMA Female	Rev.1.0

典型曲线 Typical Performance Data:

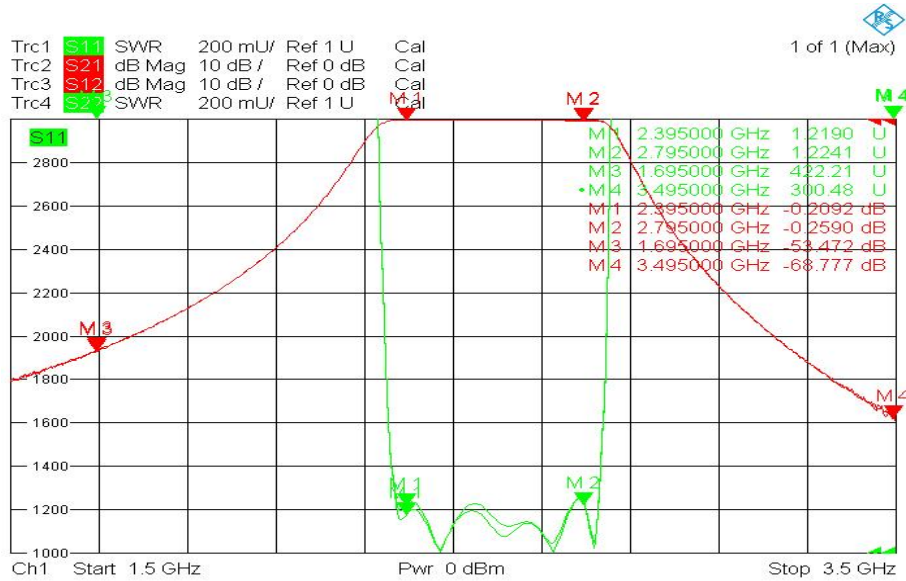

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.