

Coaxial Band-pass Filter

34.6-35.4GHz/ 2.92 Female

Model: TLBF-34G6-35G4-A

TLBF-34G6-35G4-A is a coaxial band-pass filter with a passband frequency from 34.6 to 35.4GHz and a rejection frequencies @34.1 and 35.9 GHz. The nominal insertion loss of the filter is 1.2 dB and the typical rejection is 20 dB.

Features:

- Passband Frequency Range 34.6 to 35.4Hz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations


电气特性 Electrical Characteristics:

参数 Parameter		Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range		34.5		34.6	GHz
通带插损 Passband Insertion Loss				1.2	dB
带内纹波 Pass Band Ripple				1.0	dB
带外抑制 Rejection	@34.1GHz	20			dB
	@35.9GHz	20			
耐受功率 Power Handling				10	W
输入驻波 Input VSWR				1.5	:1
输出驻波 Output VSWR				1.5	:1
阻抗 Impedance		50			Ohms

环境和机械特性 Envirionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-40 To +70	℃
存储温度 Storage Temerature	-40 to +70	℃
接口 Connectors	2.92 Female	

外形图 Outline Drawing: Unit:mm

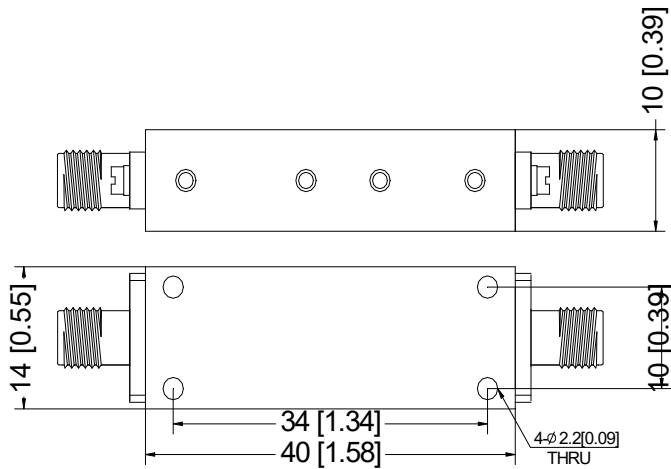


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-34G6-35G4-A	Coaxial Band-pass Filter, Passband frequency range: 34.6 to 35.4 GHz, Passband Insertion Loss: 1.2 dB, 2.92 Female	Rev.1.0

典型曲线 Typical Performance Data:

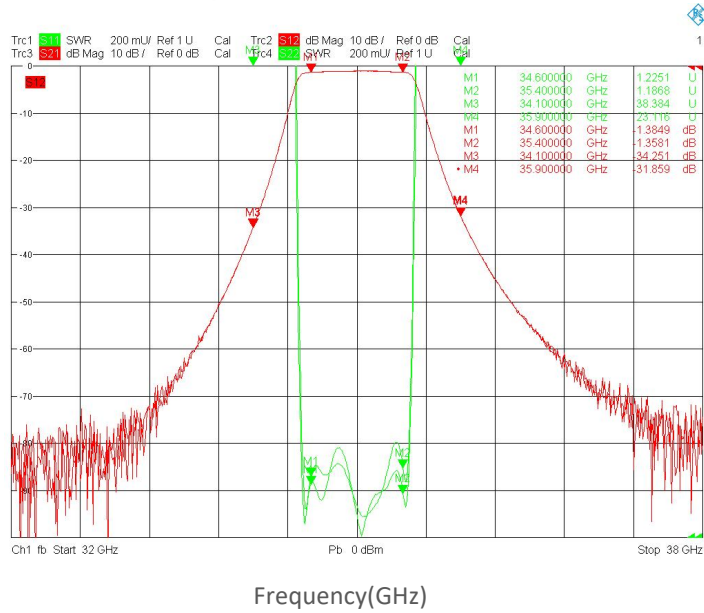

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.