

Part No.: RS16W30120-S

Power divider/Combiner 16 Way SMA 50Ω 3 to 12GHz

电气特性 Electrical:


工作频率 Frequency Range: 3-12GHz
 插入损耗 Insertion Loss: $\leq 2.8\text{dB}$
 驻波 VSWR: $\leq 1.80 : 1$
 隔离 Isolation: $\geq 15\text{dB}$
 幅度平衡 Amplitude Balance: $\leq \pm 1.0\text{dB}$
 相位平衡 Phase Balance: $\leq \pm 10^\circ$
 耐功率 Power Handling: 30 Watt
 阻抗 Impedance: 50 OHMS





机械特性 Mechanical:

温度范围 Temperature Range: $-55^\circ\text{C} - +85^\circ\text{C}$
 接口 Connectors: SMA-Female
 相对湿度 Relative Humidity: 0 ~ 90%

外形尺寸 Outline Drawing:


Unit: mm

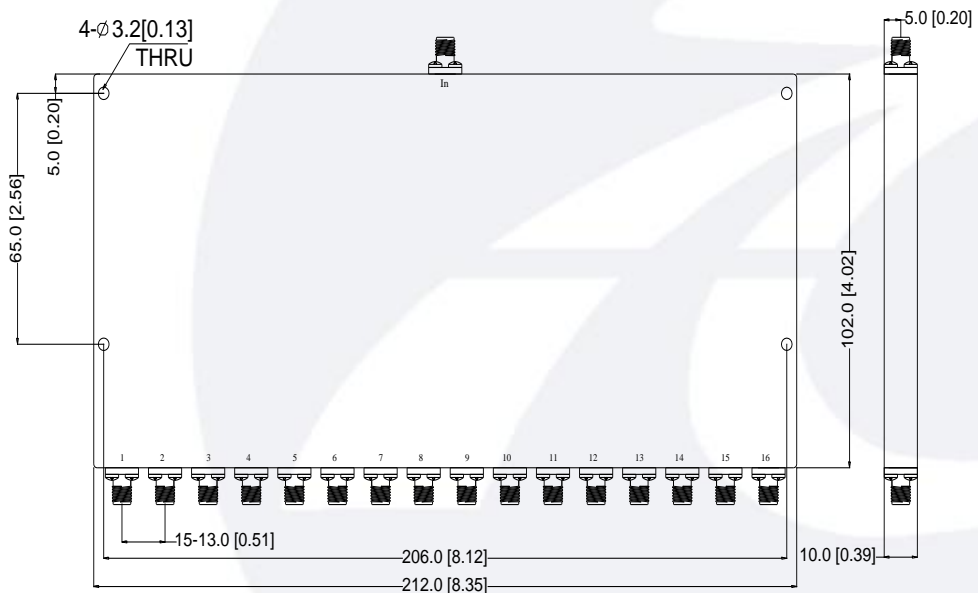

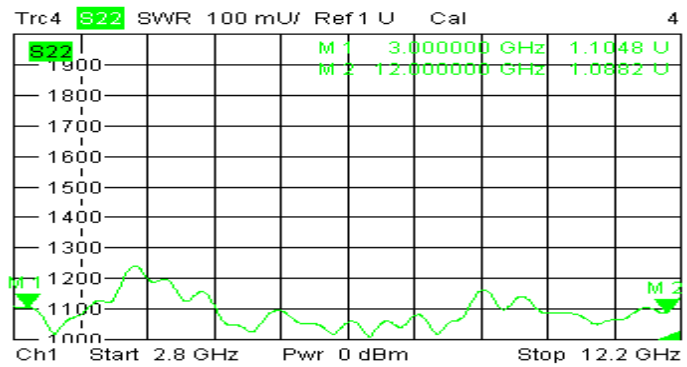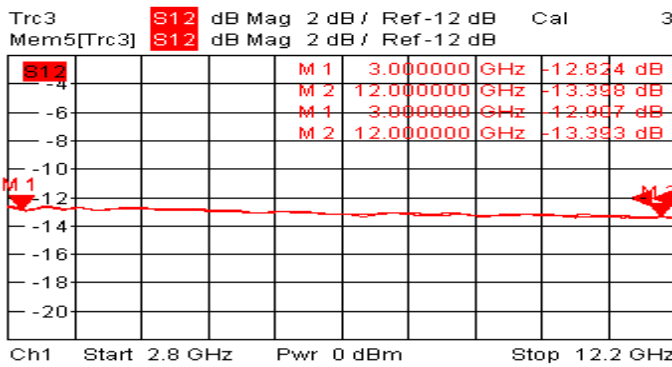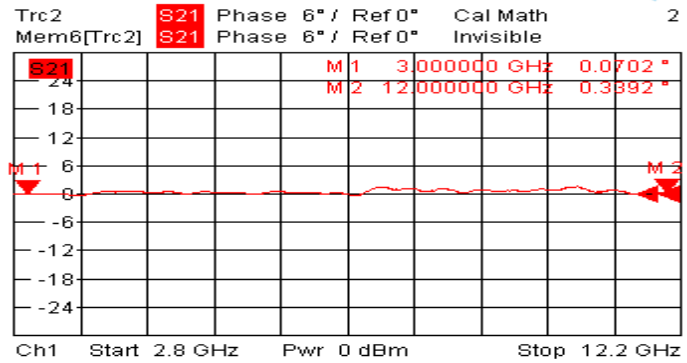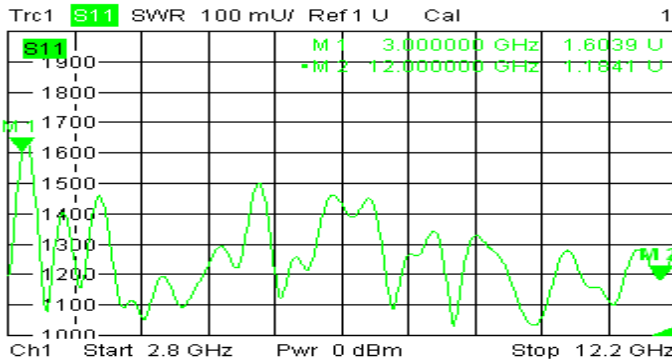

5/30/2019, 10:30 AM

Trc2 **S21** dB Mag 2 dB / Ref -16 dB Cal 2 of 4 (Max)
Mem6[Trc2] **S21** dB Mag 2 dB / Ref -16 dB Invisible

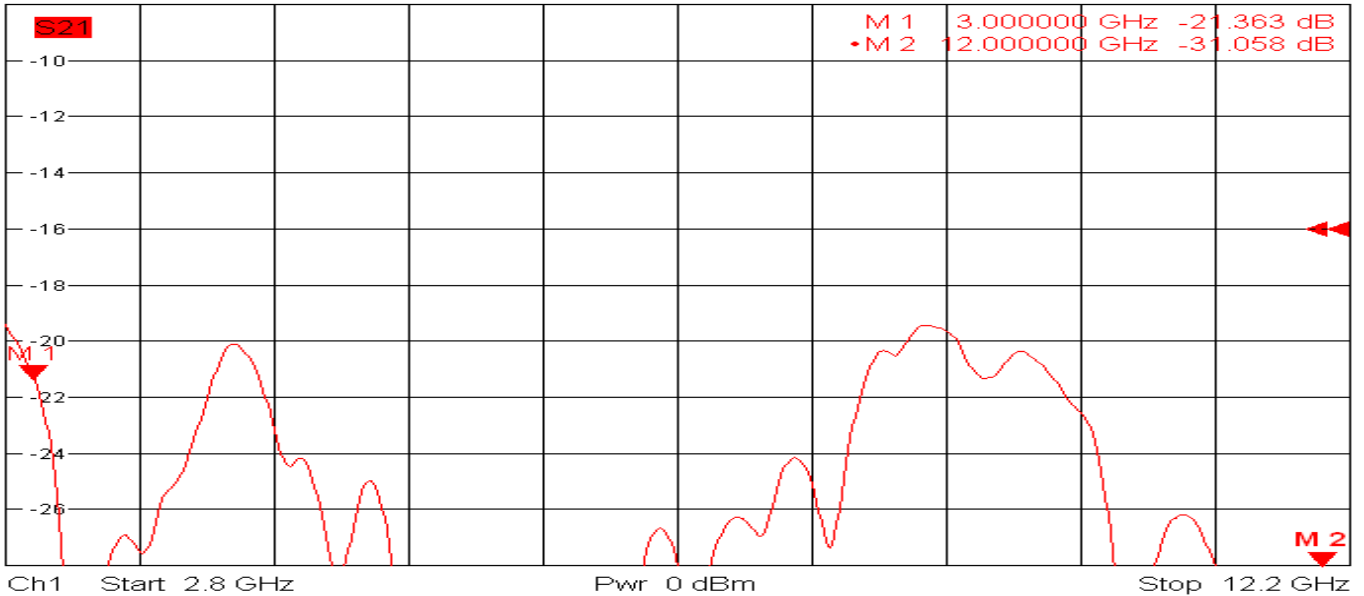

5/30/2019, 10:45 AM