

Coaxial Band-pass Filter

3.45-4.05GHz/ SMA Female

Model: TLBF-3G75-600M-E

TLBF-3G75-600M-E is a coaxial band-pass filter with a passband frequency from 3.45 to 4.05GHz and a rejection frequencies from 0 to 2.75 and 4.55 GHz. The nominal insertion loss of the filter is 1.2 dB and the typical rejection is 70 dB.

Features:

- Passband Frequency Range: 3.45 to 4.05GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations



电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	Units
通带频率范围 Passband Frequency range	3.45	3.75	4.05	GHz
通带插损 Passband Insertion Loss			1.2	dB
带内纹波 Pass Band Ripple			0.4	dB
带外抑制 Rejection	>70dB@DC-2.75GHz 4.55GHz			dB
耐受功率 Power Handling			15	W
输入驻波 Input VSWR			1.3	:1
输出驻波 Output VSWR			1.3	:1
阻抗 Impedance	50			Ohms

环境和机械特性 Envirionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temperature	-40 To +70	℃
存储温度 Storage Temperature	-40 to +70	℃
接口 Connectors	SMA Female	

外形图Outline Drawing: Unit:mm;

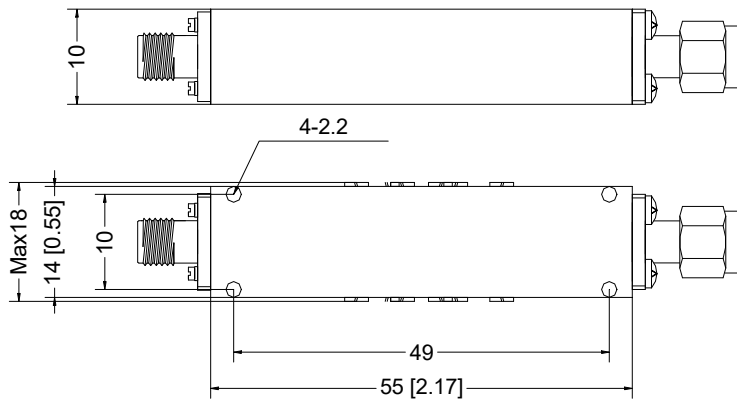


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-3G75-600M-E	Coaxial Band-pass Filter, Passband frequency range: 3.45 to 4.05 GHz, Passband Insertion Loss: 1.2 dB, SMA Female	Rev. 1.0

典型曲线 Typical Performance Data:

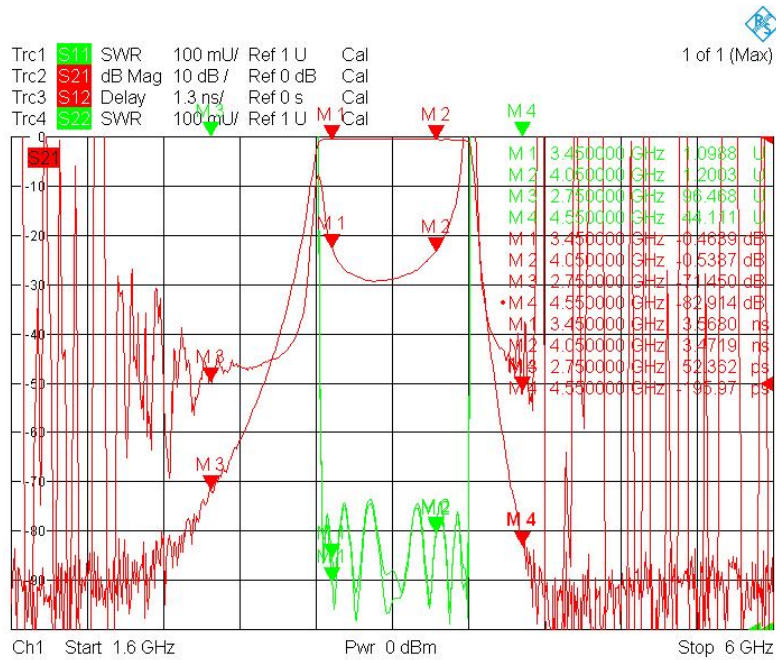

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.