

Part No.: RS2DC30-BNC

Power Splitter/Combiner 2 Way BNC 50Ω DC-3GHz

电气特性 Electrical:

工作频率 Frequency Range: DC-3GHZ

插入损耗 Insertion Loss: $\leq 6.0 \pm 0.9\text{dB}$

驻波 VSWR: 1.30: 1

耐功率 Power Handling: 2 Watt

阻抗 Impedance: 50 OHMS

机械特性 Mechanical:


温度范围 Temperature Range: $-40^{\circ}\text{C} - +70^{\circ}\text{C}$

接口 Connectors: BNC-Female

相对湿度 Relative Humidity: 0 ~ 90%


外形尺寸 Outline Drawing:

Unit: mm

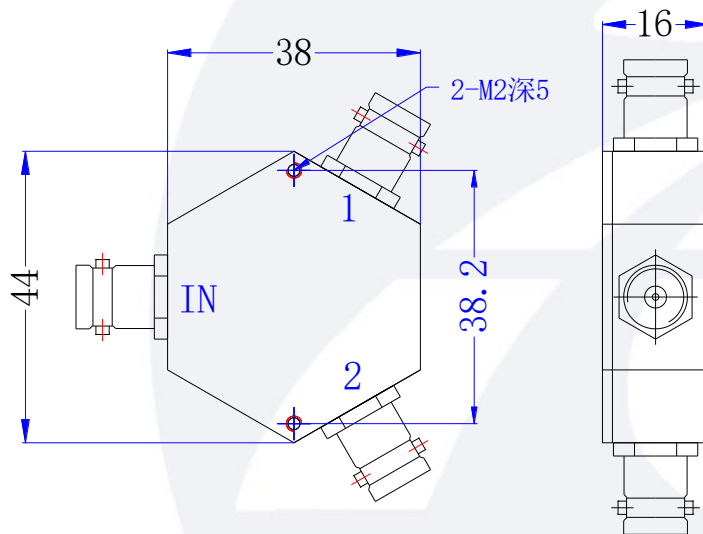

5 Jun 2020 08:39:26


CH1 SWR 100 m / REF 1
S11 2 : 1. 1302 3. 000 000 000 GHz

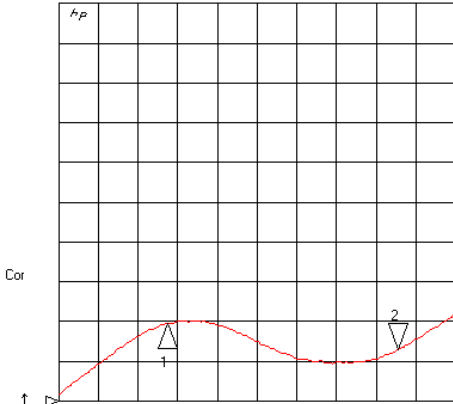

CH1 Markers
1 : 1. 1951
1. 00000 GHz

START 50 . 000 MHz STOP 3500 . 000 MHz


CH3 LOG 1 dB / REF 0 dB
S12/M 2 : - . 00600 dB 3. 000 000 000 GHz

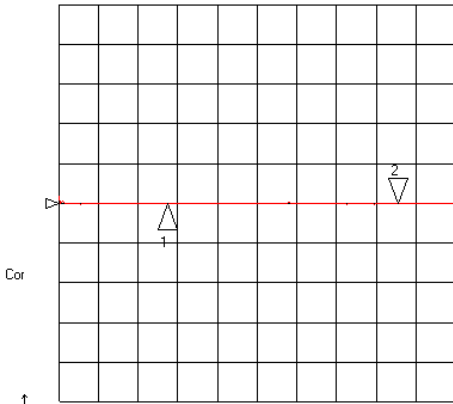

CH3 Markers
1 : - . 01200 dB
1. 00000 GHz

START 50 . 000 MHz STOP 3500 . 000 MHz
2002-1-1 00:05:09


CH2 LOG .9 dB / REF -6 dB
S21 2 : -6 . 3240 dB 3. 000 000 000 GHz

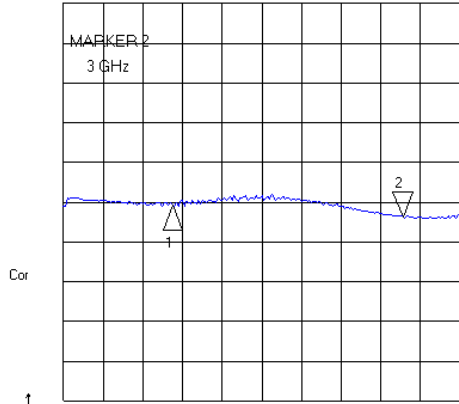

CH2 Markers
1 : -6 . 0590 dB
1. 00000 GHz

START 50 . 000 MHz STOP 3500 . 000 MHz

CH4 SWR 100 m / REF 1
S22 2 : 1. 1147 3. 000 000 000 GHz

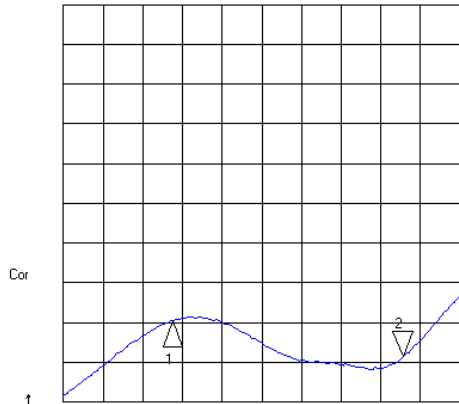

CH4 Markers
1 : 1. 2050
1. 00000 GHz

START 50 . 000 MHz STOP 3500 . 000 MHz