

Part No.: RS3DC30-BNC

Power Splitter/Combiner 3 Way BNC 50Ω DC-3GHz

电气特性 Electrical:

工作频率 Frequency Range: DC-3GHZ

插入损耗 Insertion Loss: $\leq 9.5 \pm 1.2\text{dB}$

驻波 VSWR: 1.40: 1

耐功率 Power Handling: 2 Watt

阻抗 Impedance: 50 OHMS

机械特性 Mechanical:


温度范围 Temperature Range: $-40^{\circ}\text{C} - +70^{\circ}\text{C}$

接口 Connectors: BNC-Female


相对湿度 Relative Humidity: 0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

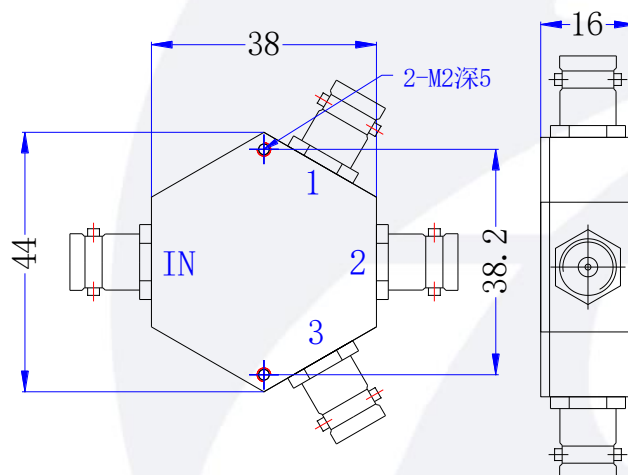


CH1 SWR 100 m / REF 1
S11 2 : 1.2303 3.000 000 000 GHz

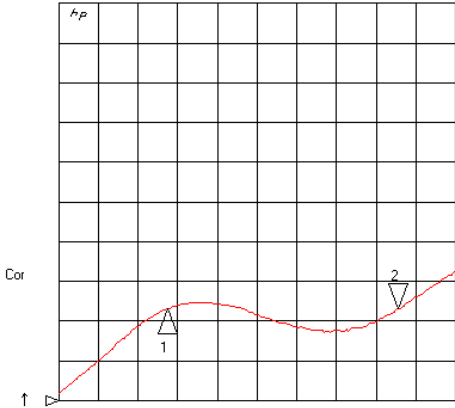

CH1 Markers
1 : 1.2317
1.00000 GHz

START 50.000 MHz STOP 3500.000 MHz

CH3 LOG 1 dB / REF 0 dB
S12/M 2 : .00700 dB 3.000 000 000 GHz

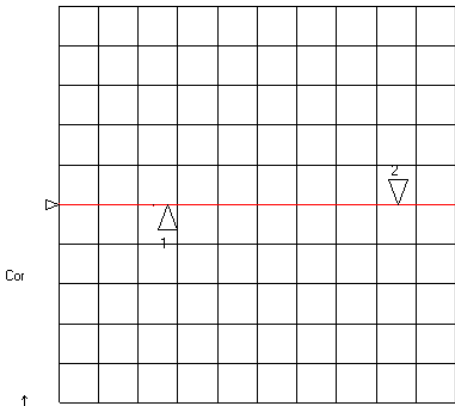


CH3 Markers
1 : .00000 dB
1.00000 GHz

START 50.000 MHz STOP 3500.000 MHz
2002-1-1 00:02:39

5 Jun 2020 08:36:57


CH2 LOG 1.2 dB / REF -9.5 dB
S21 2 : -9.8300 dB 3.000 000 000 GHz

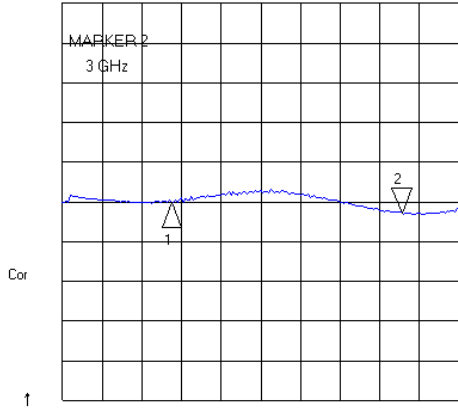

CH2 Markers
1 : -9.4910 dB
1.00000 GHz

START 50.000 MHz STOP 3500.000 MHz

CH4 SWR 100 m / REF 1
S22 2 : 1.1135 3.000 000 000 GHz

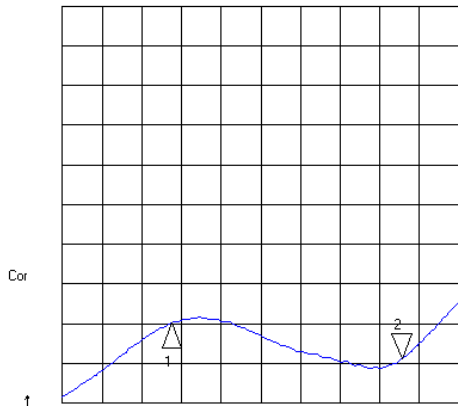

CH4 Markers
1 : 1.2023
1.00000 GHz

START 50.000 MHz STOP 3500.000 MHz