

Waveguide Bandpass Filter

WR-12/67-84GHz

Model: TLBF-6784-30

TLBF-6784-30 is a waveguide bandpass filter with a passband frequency from 67 to 84 GHz and a rejection frequency from 89 to 170 GHz. The nominal insertion loss of the filter is 1.0 dB and the typical rejection is 30 dB.

Features:

- Passband Frequency Range 67 to 84 GHz
- Lower Cost
- Low Insertion Loss
- High Rejection

Applications:

- Communicatin Systems
- Radar Systems
- Sub-assemblies


电气特性 Electrical Characteristics:

参数 Parameter		Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range		67		84	GHz
通带带宽 Passband Width			16		GHz
回波损耗 Rreturn Loss			-18	-15	dB
通带插损 Passband Insertion Loss			1.0	1.5	dB
带外抑制 Rejection	@DC-58GHz	30			dB
	@89-170GHz	30			

环境和机械特性 Envrionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-40 To +70	℃
波导 Waveguide	WR-12/UG-387/U-M	

外形图 Outline Drawing: Unit:mm

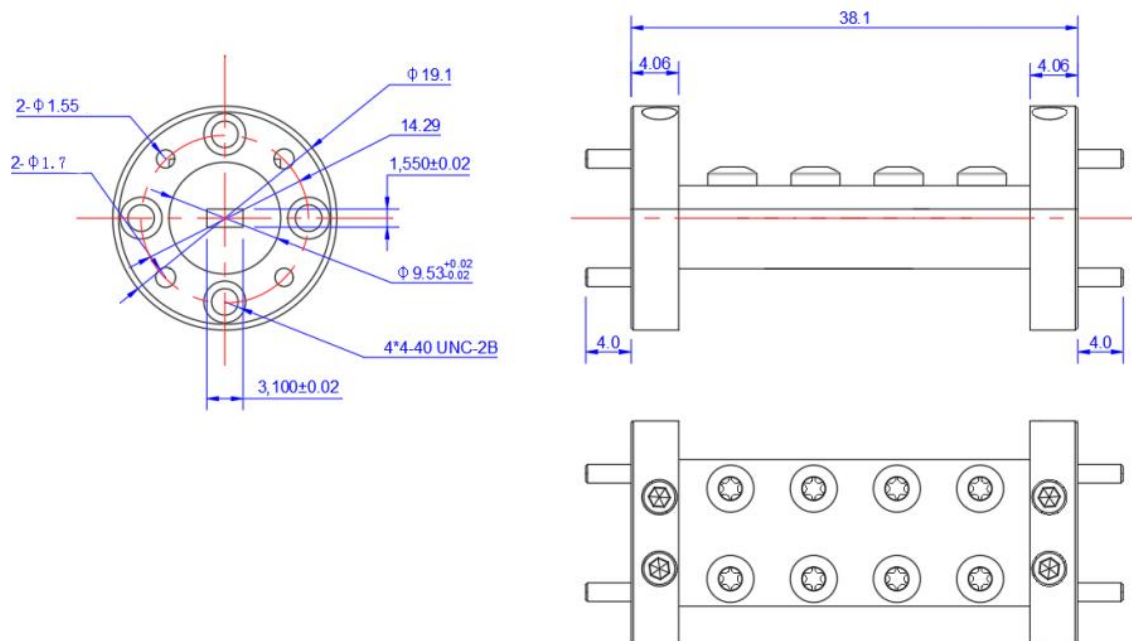

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Desciption	版本号 Revision
TLBF-6784-30	Waveguide Bandpass Filter,67-84GHz,Insertion Loss:1.0dB, Rejection:30dB@DC-58GHz&89-170GHz,WR-12/UG-387/U-M	Rev.1.1