


### Electrical & Environmental Characteristics

Impedance	50 Ohm
Insulation Resistance	5000 MΩ
Operating Frequency	DC~67GHz
Dielectric Withstanding Voltage	1000 V
VSWR	≤1.25:1
Insertion Loss	≤0.65 dB
Operating Temperature	-55~+165℃

### Material & Coat-Plating

Inner Conductor	Beryllium copper, Gold
Dielectric	PEI
Body	Stainless Steel, Passivated
Coupling Nut	Stainless Steel, Passivated

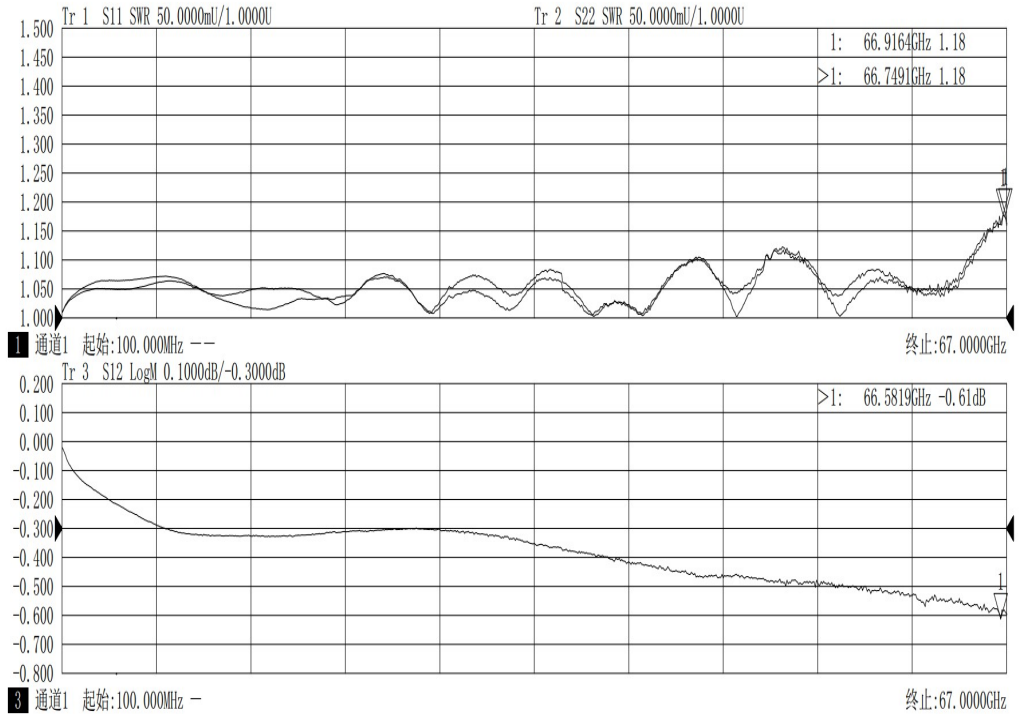

扫描类型 起始频率 终止频率 扫描点数 中频带宽(Hz) 扫描时间(s) 端口1,2功率(dBm)

通道1 线性扫描 0.100000000GHz 67.000000000GHz 801 1000 0.806015 -5.0,-5.0

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN	Suzhou Talent Microwave, Inc			
		CHK				
Unit mm	TOLERANCES UNLESS OTHERWISE SPECIFIED 0 PLC ±0.25 1 PLC ±0.15 2 PLC ±0.12 3 PLC ± 3 PLC ± ANGLES ±1°	APVD	Product Mode			
		PRODUCT SPEC	1.0/1.85-KJG-1			
		APPLICATION SPEC	1.0mm Female to 1.85mm Male Adaptor			
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT	SIZE A4	GAGE CODE OT8L4	DRAWING NO	
			CUSTOMER DRAWING	SCALE 4: 1	SCALE 4: 1	SHEET1 OF 1 RVE 1