

V-Band Power Amplifier

WR-15/50-75GHz /34dB Gain/20 dBm Psat**Model: TMPA-050075-3518-15**

TMPA-050075-3518-15 is a V-Band power amplifier with a typical small signal gain of 34 dB and Psat of 20 dBm across the frequency range of 50 to 75 GHz. The DC power requirement for the amplifier is +12 VDC/250 mA. The input and output port configuration offers an inline structure with WR-15 waveguides and UG-385/U-M antcocking flanges.

Features:

- Ultra Wide Band: 50-75 GHz
- Gain: 34dB Typ
- Output Power Psat: 20dBm Min
- Good Power and Gain Flatness

Applications:

- Passive Imaging
- Communication Systems
- Radar Systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	50-75			GHz
Small Signal Gain		34		dB
Output Psat	20			dBm
Input VSWR		2.2		:1
Output VSWR		2		:1
DC Voltage		12		V DC
DC Supply Current		250		mA

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	WR-15/UG-385/U	
DC Bias	Solder Pin	
Size	45*30*23	mm
Weight	/	g

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+15V
RF Input Power	+10 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

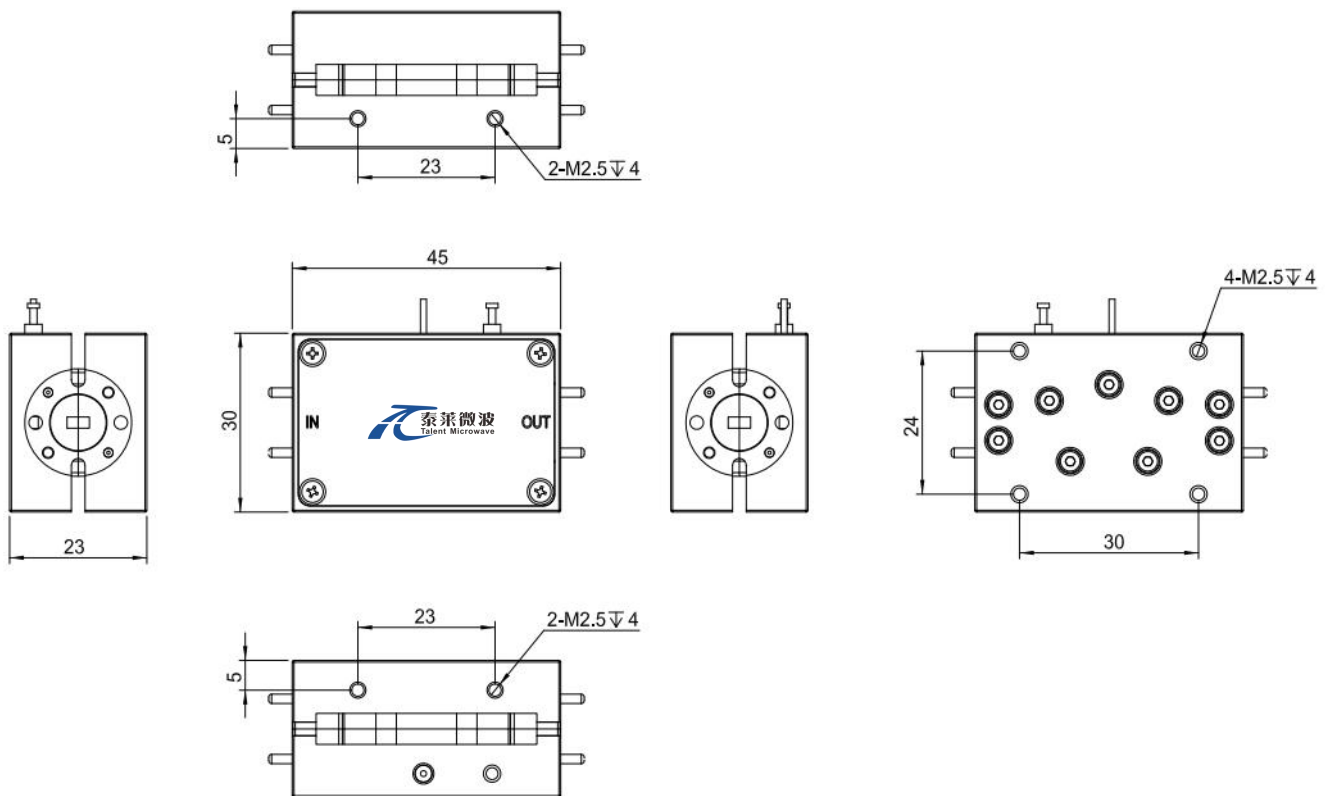


Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+65	°C
Non-operating Temperature	-45		+85	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Base Number	Description	Revision
TMPA-050075-3518-15	Power Amplifier, 50-75 GHz, Gain:34 dB Type, Psat:20 dBm Min, +12V DC,WR-15	Rev.1.1


Typical Performance Data:

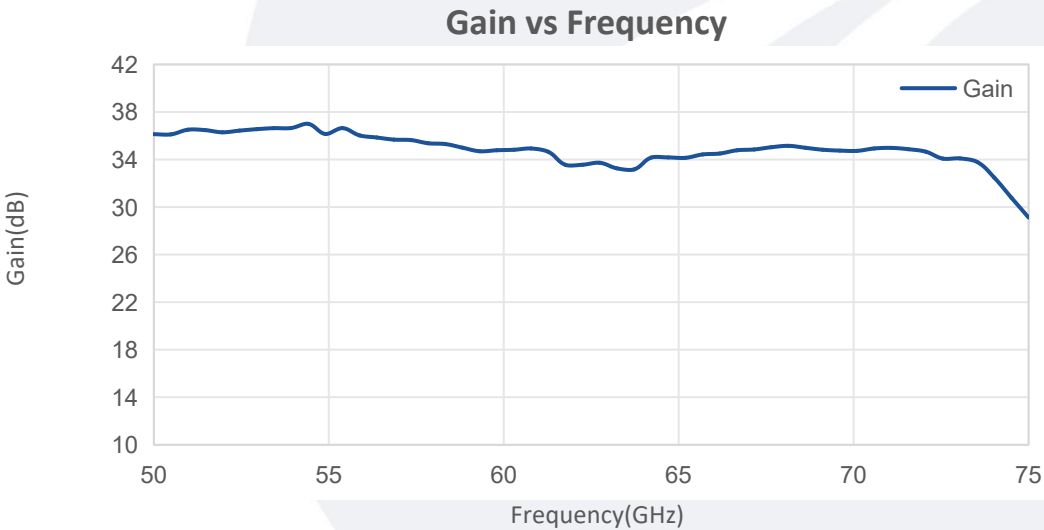


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

VSWR vs Frequency

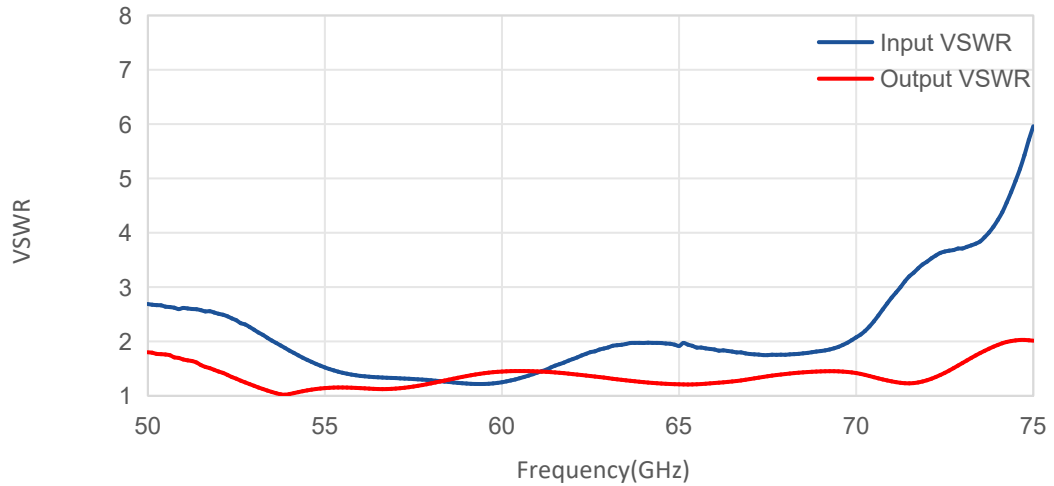

Psat vs Frequency

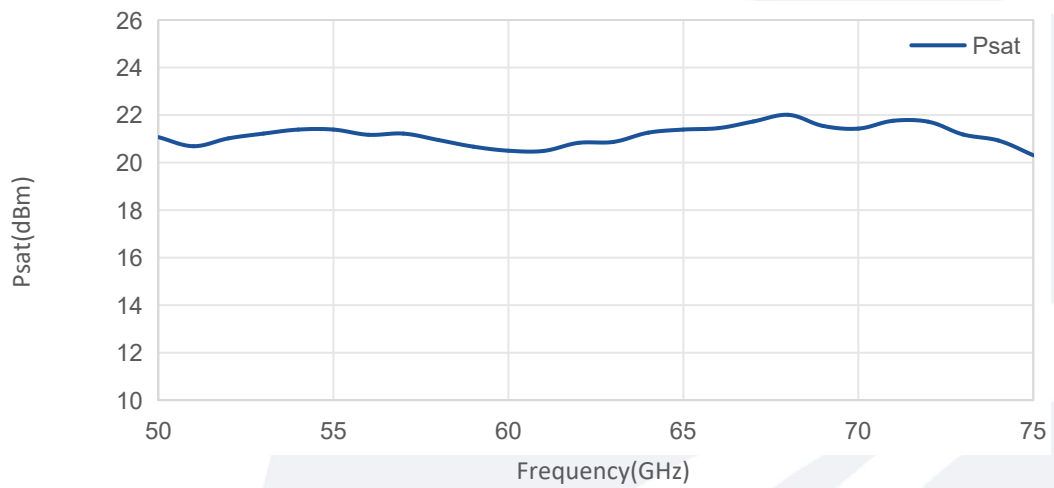

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.