

Power Amplifier

0.1-6GHz /30dB Gain/30 dBm Psat

Model: TLPA100M6G-30-30

TLPA100M6G-30-30 is a power amplifier with a typical small signal gain of 30 dB and a Psat of 30 dBm across the frequency range of 0.1 to 6 GHz. The DC power requirement for the amplifier is +15 VDC/0.7 A. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Ultra Wide Band: 0.1-6GHz
- Gain: 30dB Typ
- Output Power Psat: 30dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	0.1-6			GHz
Small Signal Gain	27	30		dB
Gain Flatness		±3	±4	dB
Output P1dB	30	31		dBm
Output Psat	30			dBm
Harmonics		-25	-20	dBc
Input VSWR		1.5	2	:1
DC Voltage		15	16	V DC
DC Supply Current		0.7	1	A
Impedance	50			Ohms

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	SMA Female/SMA Female	
DC Bias	Solder Pin	
Size	120*70*15	mm
Weight	200	g

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+16 V
RF Input Power	+5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

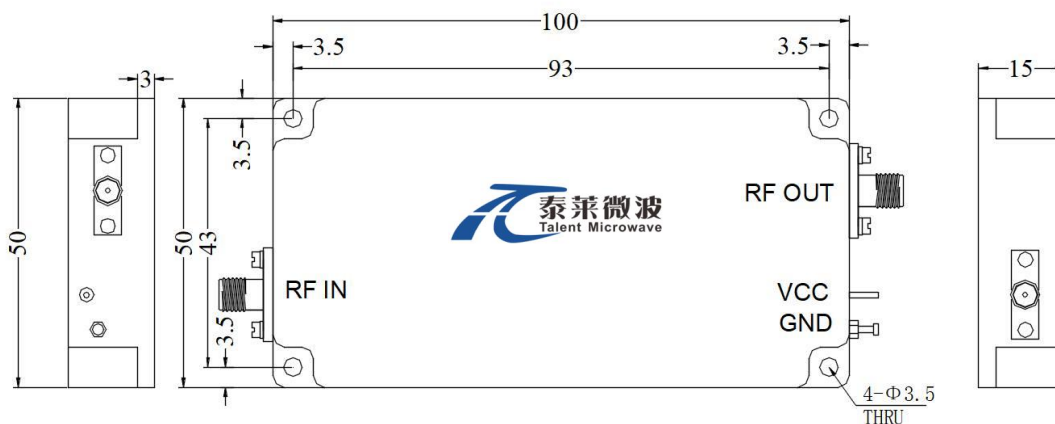

*****Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-40		+60	°C
Non-operating Temperature*	-50		+70	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:

Base Number	Description	Revision
TLPA100M6G-30-30	Power amplifier 0.1-6GHz,Gain:30dB,Psat:30dBm, +15V DC,Without Heatsink	Rev.1.1
TLPA100M6G-30-30-HS	Power amplifier 0.1-6GHz,Gain:30dB,Psat:30dBm, +15V DC,With Heatsink	Rev.1.1

Typical Performance Data:


Input VSWR vs Frequency

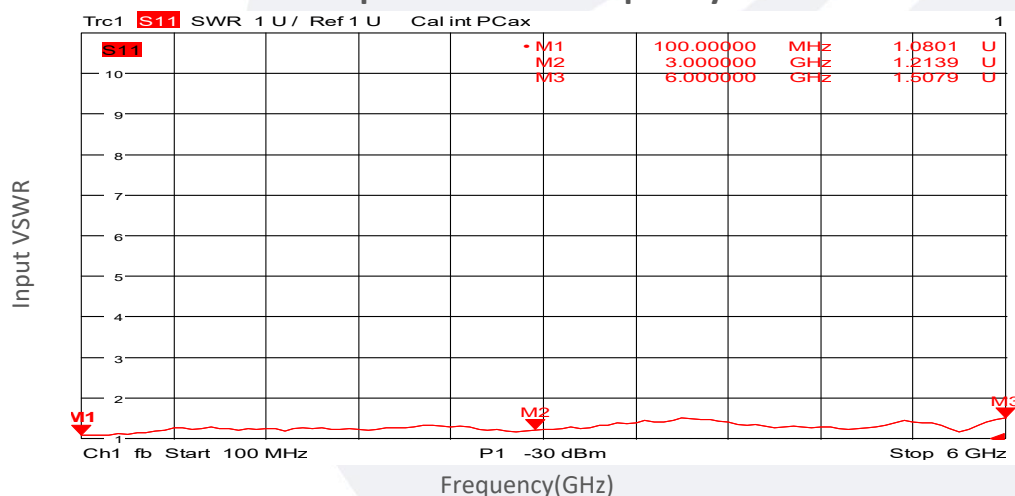


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:


Small Signal Gain vs Frequency

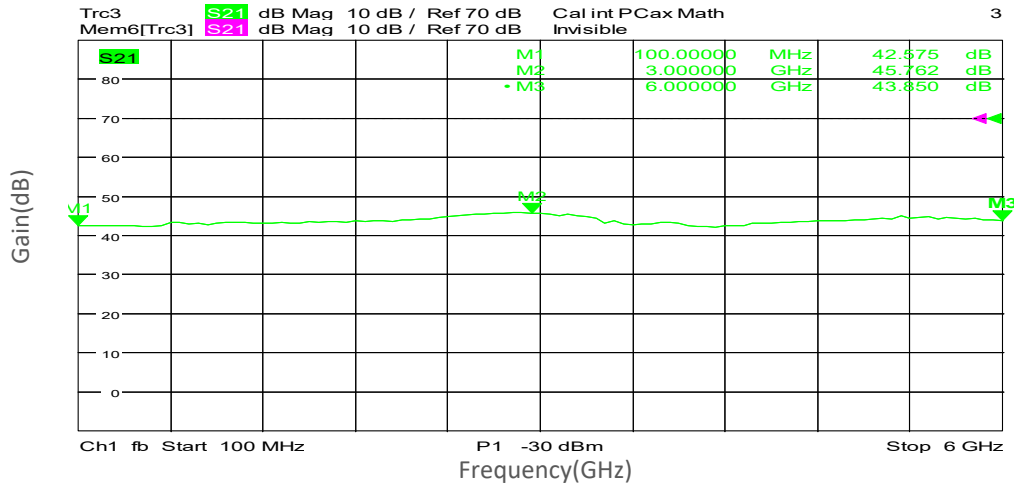

Gain vs Output Power

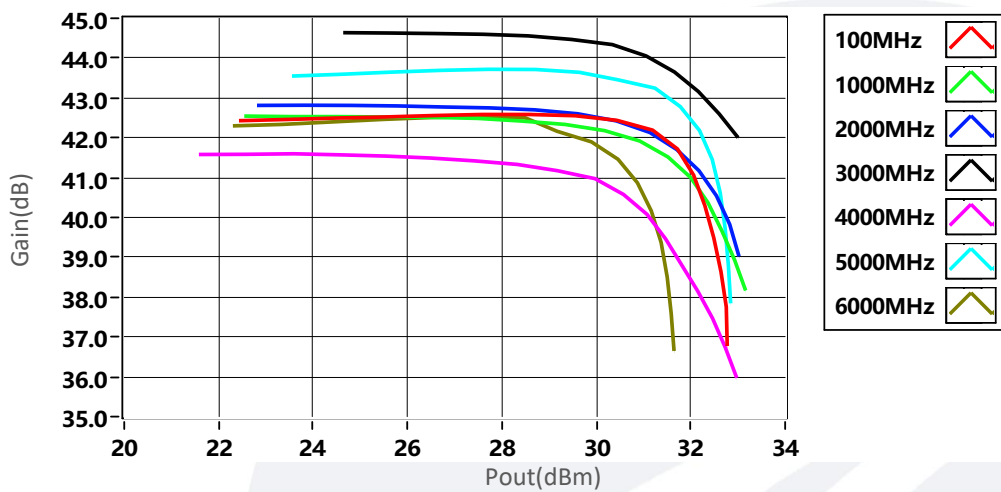


P1dB vs Frequency

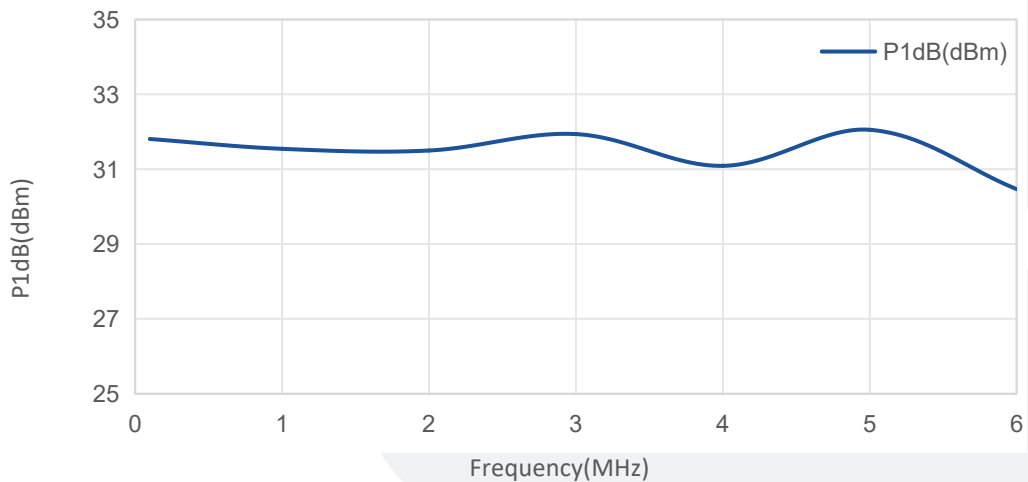


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

Psat vs Frequency

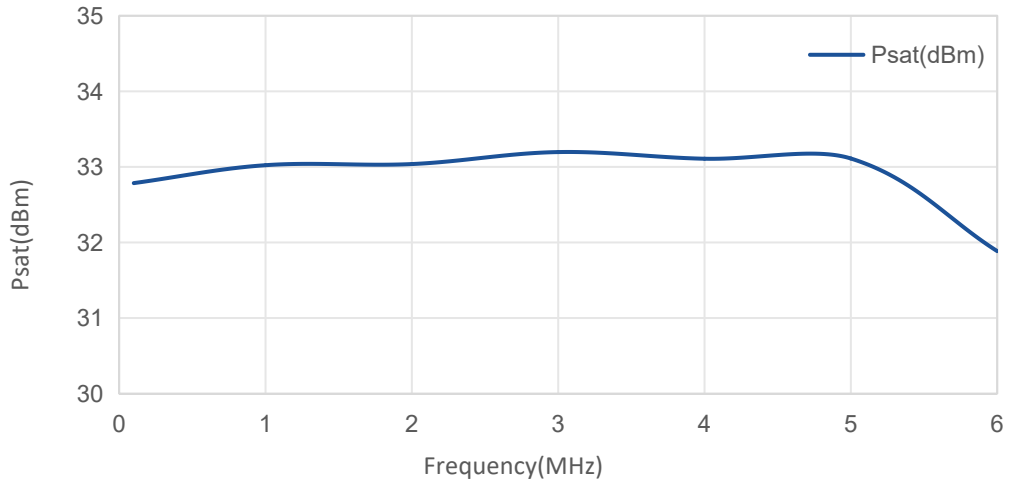

Harmonics vs Output Power

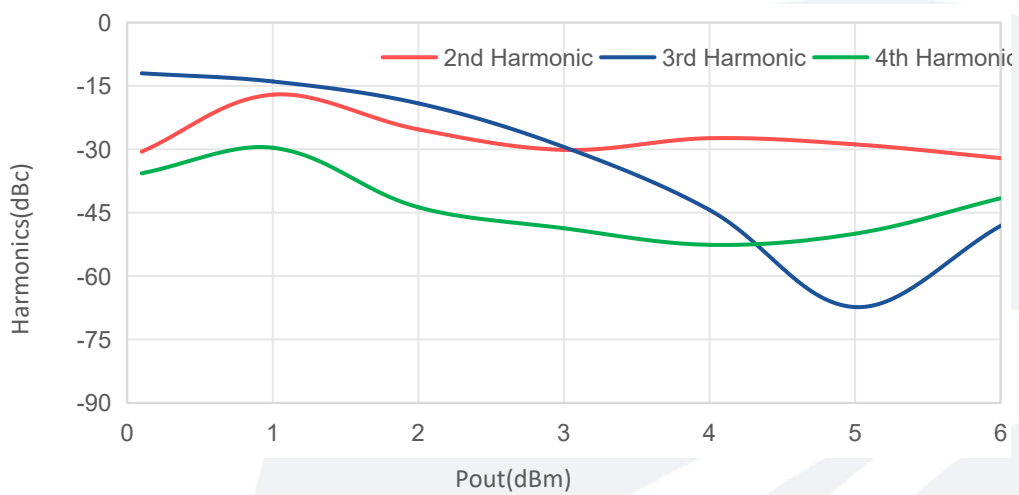

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.