

Low Noise Amplifier

WR-05/120-200GHz /4.5 NF/16dB Gain

Model: TMLA-120200-2040-05

TMLA-120200-2040-05 is a low noise amplifier with a typical small signal gain of 16 dB and a nominal noise figure of 4.5 dB across the frequency range of 120 to 200 GHz. The DC power requirement for the amplifier is +5 VDC/28 mA. The input and output port configuration offers an inline structure with WR-05 waveguides and UG-387/U-M anti-cocking flanges.

Features:

- Frequency range:120-200GHz
- Gain: 16dB Typ
- Noise Figure: 4.5dB Typ
- Unconditional stability

Applications:

- Passive Imaging
- 5G Systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	120		200	GHz
Small Signal Gain		16		dB
Noise Figure		4.5		dB
Output P1dB		-2		dBm
Input VSWR		2.5		:1
Output VSWR		2.5		:1
DC Voltage		5		V DC
DC power supply		28		mA

Mechanical Specifications:

Parameter	Value	Units
Input Connector	WR-05/ UG-387/U	
Output Connector	WR-05/ UG-387/U	
Power Supply Pin	Solder Pin	
Size	30*30*23	mm







Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+8 V
RF Input Power	+10 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

Regulatory Compliance:

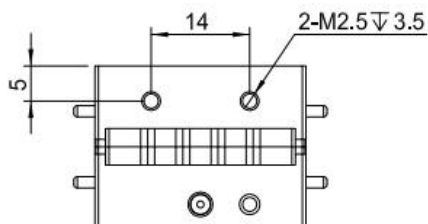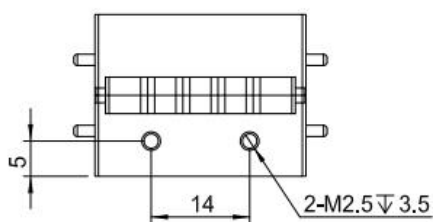


Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+65	°C
Non-operating Temperature	-45		+85	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Base Number	Description	Revision
TMLA-120200-2040-05	Low Noise Amplifier,120-200GHz, Noise Figure:4.5dB, Gain:16dB,+5V DC,WR-05	Rev.1.1


Typical Performance Data:

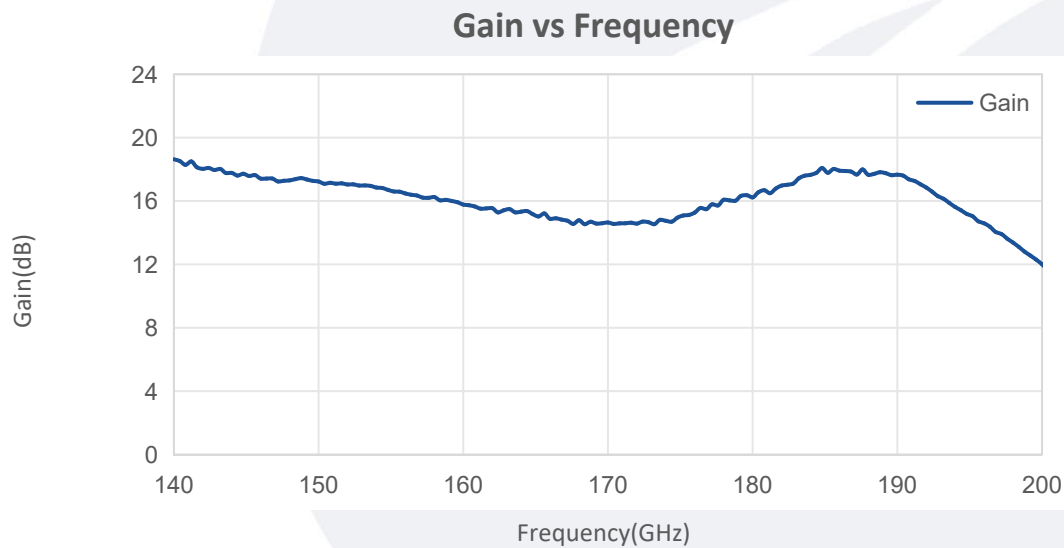


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:


Noise Figure vs Frequency

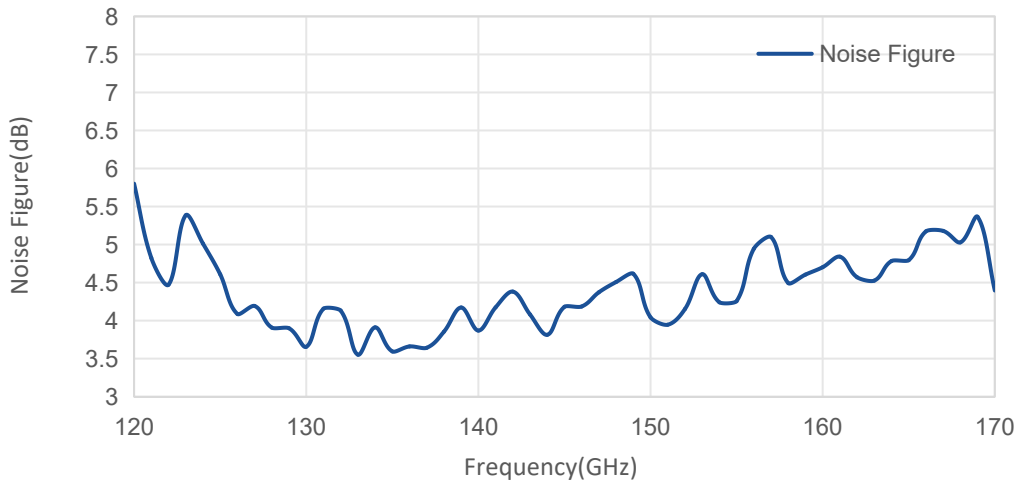

VSWR vs Frequency

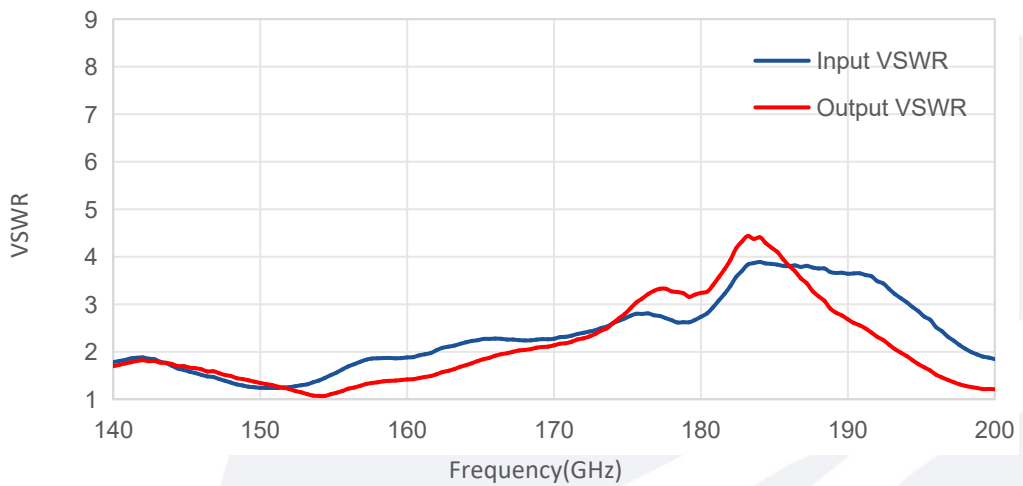

Pout vs Pin

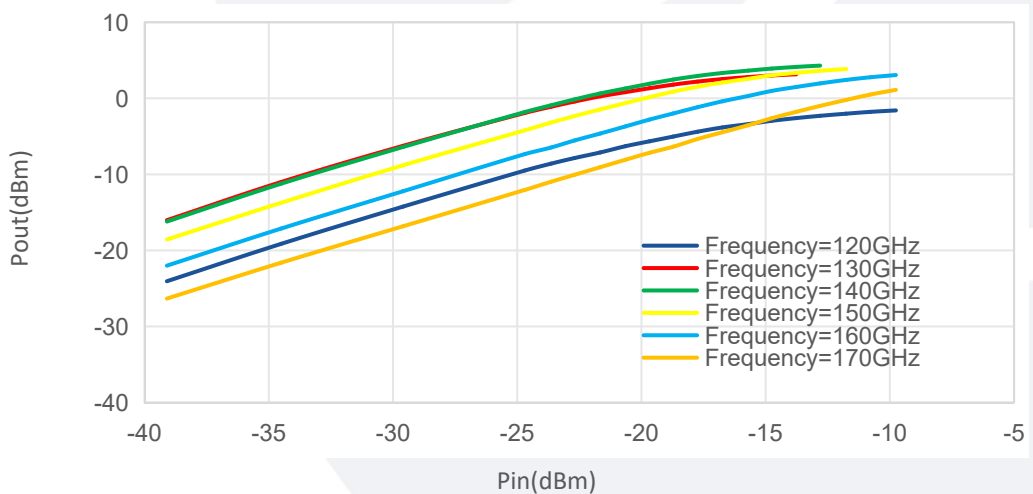

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.