

## Low Noise Amplifier

4-8GHz/1.1dB NF/25dB Gain/16dBm P1dB

Model: TLLA4G8G-25-11

TLLA4G8G-25-11 is a low noise amplifier with a minimum small signal gain of 25 dB and a nominal noise figure of 1.1 dB across the frequency range of 4 to 8 GHz. The DC power requirement for the amplifier is +12 V DC/80 mA. The input and output port configuration offers coax adapter structure with SMA female.

### Features:

- Frequency range: 4-8GHz
- Gain: 25dB Min
- Noise Figure: 1.1dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

### Applications:

- Communication systems

### Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	4		8	GHz
Small Signal Gain	25			dB
Gain Flatness		±1.0		dB
Noise Figure		1.1		dB
Output P1dB	14	16		dBm
Input VSWR		2.0	2.2	:1
Output VSWR		2.0	2.2	:1
DC Voltage		+12		V DC
DC Supply Current		80		mA
Impedance		50		Ohms

### Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	SMA Female/SMA Female	
DC Bias	Solder Pin	
Size	32.1*29.2*11	mm


### Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+15 V
RF Input Power	+15 dBm
ESD sensitivity (HBm)	Class 0, passed 150V



### Outline Drawing:

Unit:mm

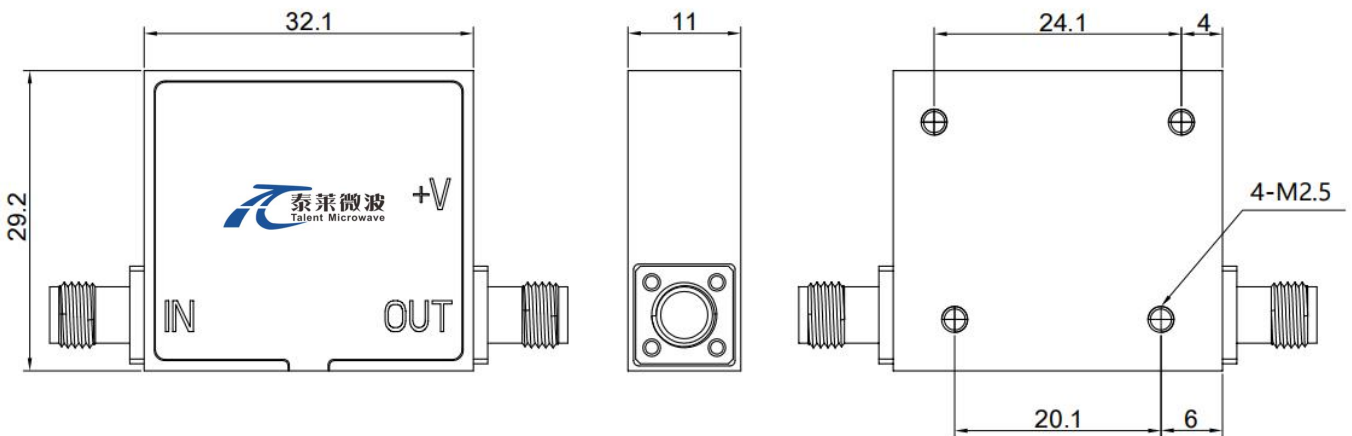

**\*\*\*Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

### Environmental Conditions:


Parameter	Min	Typ	Max	Units
Operating Temperature	-45		+85	°C
Non-operating Temperature	-55		+125	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

### Ordering Information:


Base Number	Description	Revision
TLLA4G8G-25-11	Low Noise Amplifier, 4-8GHz, Noise Figure:1.1dB, Gain:25dB,P1dB:16dBm,+12V DC,Without Heatsink	Rev.1.1
TLLA4G8G-25-11-HS	Low Noise Amplifier, 4-8GHz, Noise Figure:1.1dB, Gain:25dB,P1dB:16dBm,+12V DC,With Heatsink	Rev.1.1

### Typical Performance Data:

#### Gain&VSWR vs Frequency

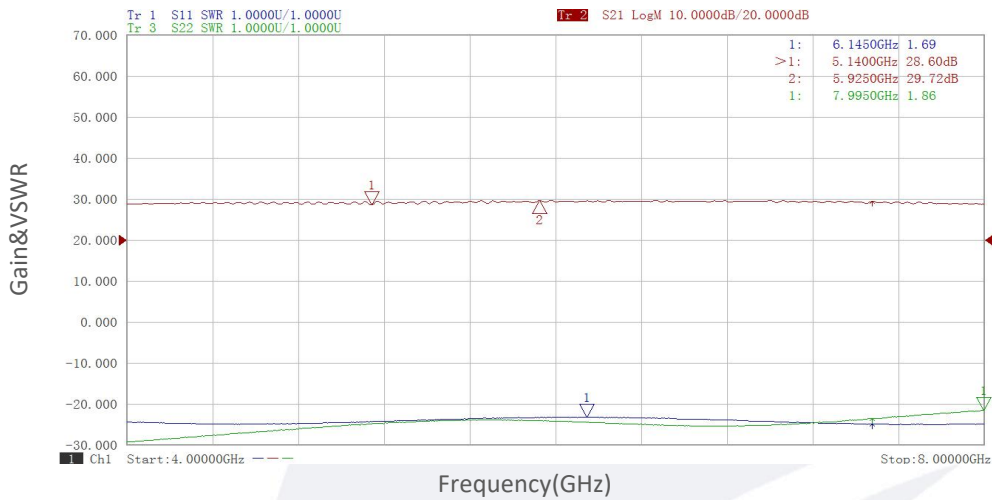


#### Noise Figure vs Frequency

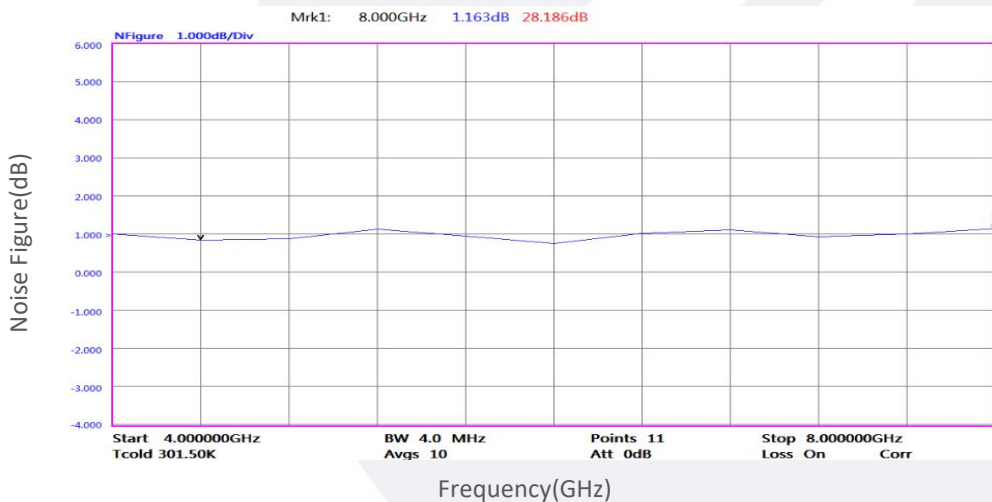


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

## Typical Performance Data:


### Gain vs Output Power

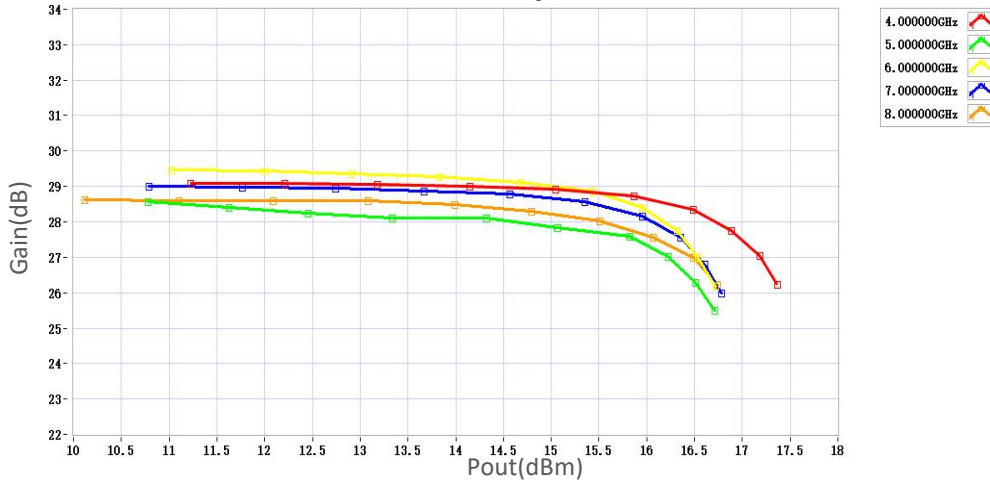

### P1dB vs Frequency

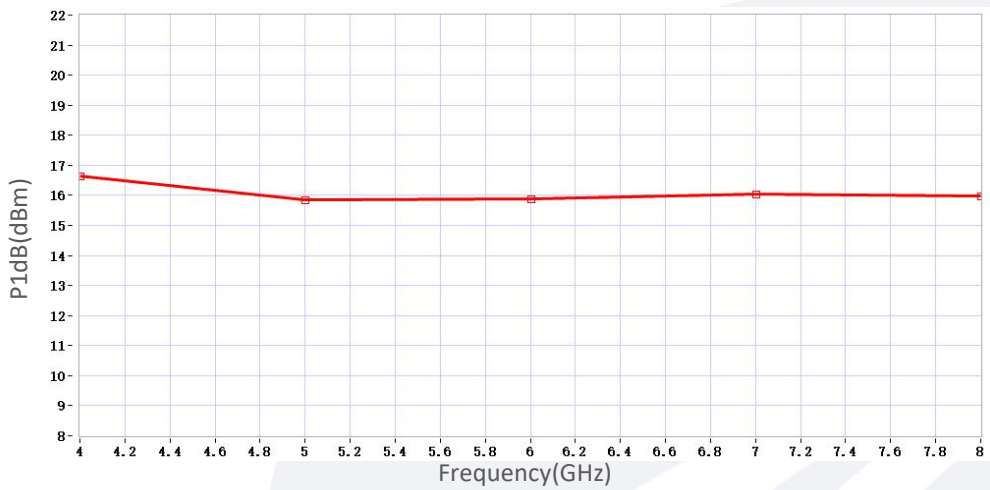

### 2nd Harmonic vs Output Power

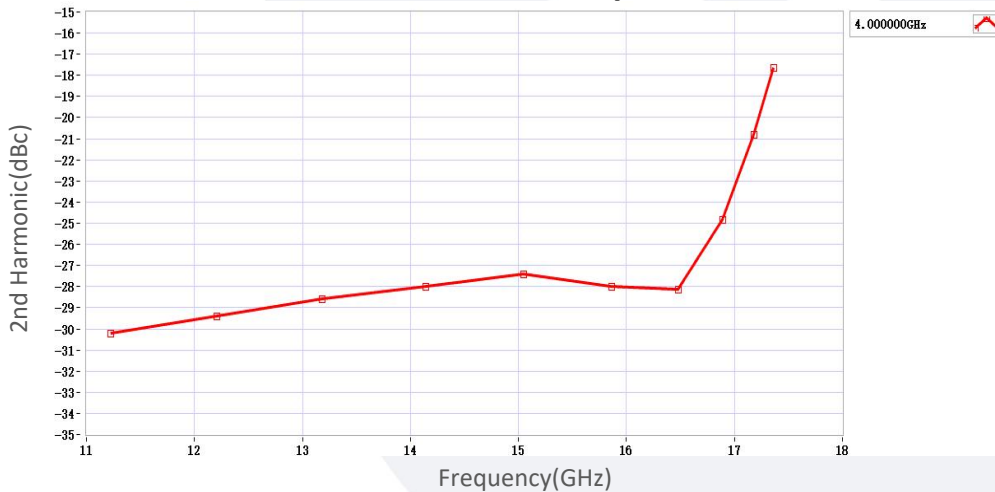

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.