

## E-Band, Active Frequency Multiplier

WR-12/X6/80-86GHz /25dBm Output Power

Model: TMAM-080086-0625-12

TMAM-080086-0625-12 is an active X6 frequency multiplier. The multiplier has an input frequency of 13.33 to 14.33 GHz with a typical input power of +5 dBm and an output frequency of 80 to 86 GHz with a typical output power of +25 dBm. The DC power requirement for the multiplier is +12 V DC/610 mA. The input port configuration is a female SMA connector and the output is a WR-12 waveguide with a UG-387/U-M anti-cocking flange.

### Features:

- Output Frequency:80-86GHz
- Output Power :25dBm Typ
- Low power consumption

### Applications:

- Frequency Extenders
- THz Systems

### Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Output Frequency	80		86	GHz
Output Power		25		dBm
Input Frequency	13.33		14.33	GHz
Input Power	3	5	7	dBm
Multiply Factor		6		
Harmonic Suppression			-40	dBc
DC Voltage		12		V
DC Supply Current		610		mA

### Mechanical Specifications:


Parameter	Value	Units
Output Connector	WR-12/UG-387/U	
Input Connector	SMA Female	
DC Bias	Solder Pin	
Size	50*28*23(Without Heatsink) 50*70*43(With Heatsink)	mm

### Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+15 V
RF Input Power	+25 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

### Outline Drawing:

Unit:mm

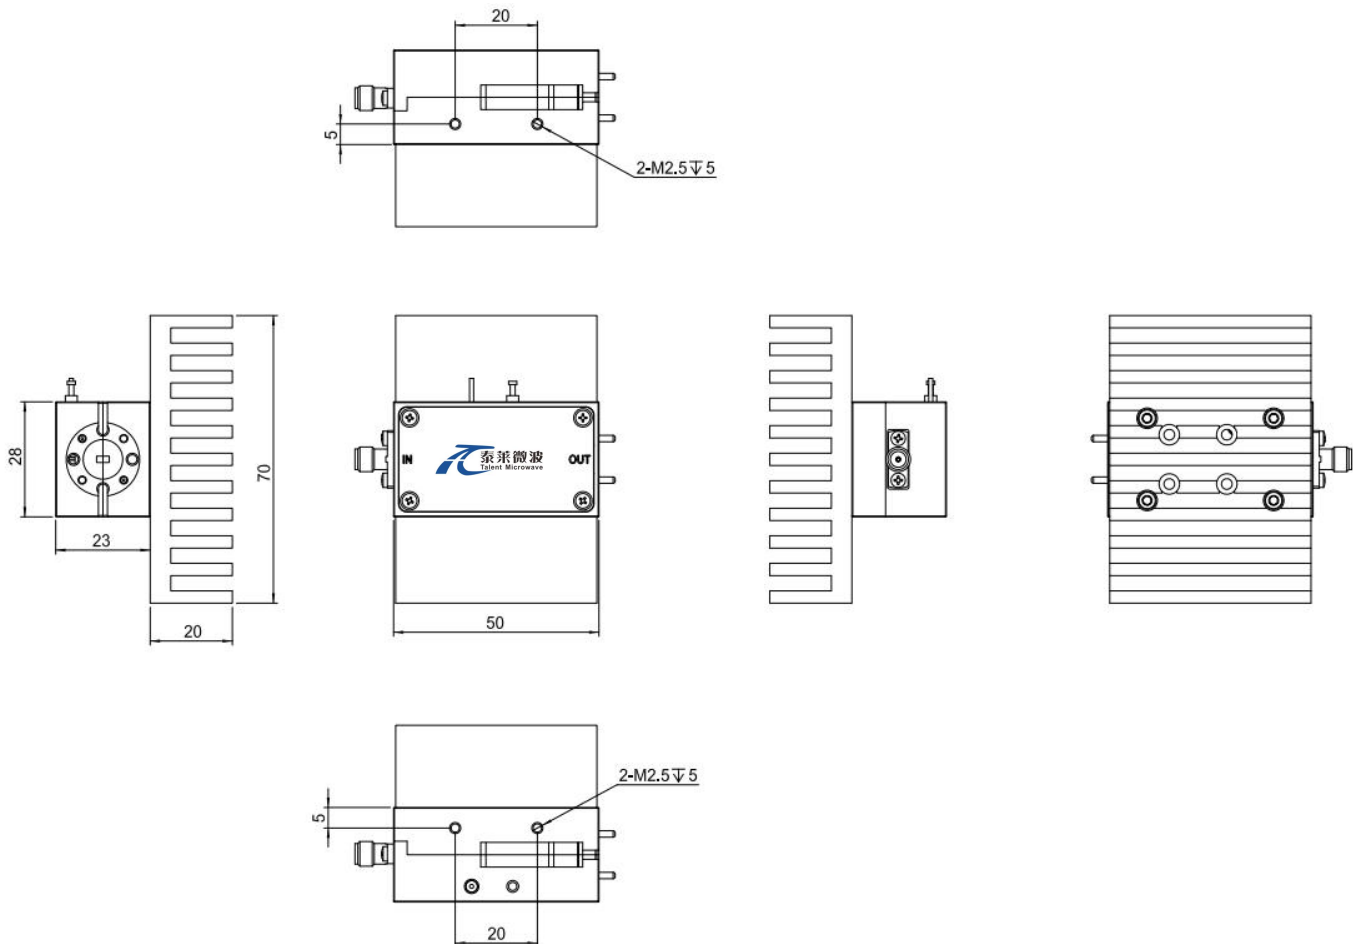

### Environmental Conditions:


Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+65	°C
Non-operating Temperature	-45		+85	°C
Relative humidity		95		%
Altitude	50,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

### Ordering Information:

Base Number	Description	Revision
TMAM-080086-0625-12	Active Multiplier,X6,80-86GHz, Output Power:25dBm,WR-12/UG-387/U,SMA Female	Rev.1.1

### Typical Performance Data:

Output Power vs Frequency

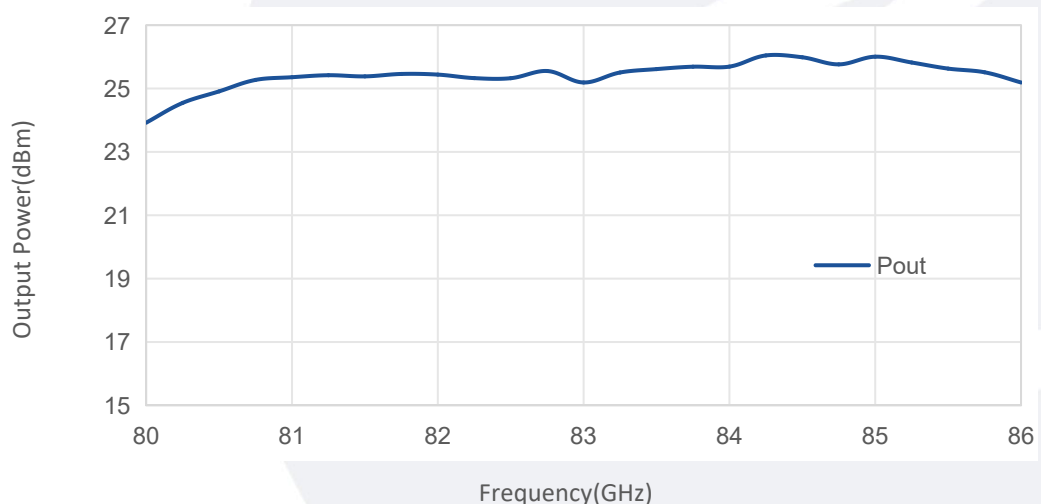

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.