

Coaxial Low-pass Filter

DC-13GHz/SMA Female

Model: TLLF-DC-13G-X3

TLLF-DC-13G-X3 is a coaxial low-pass filter with a passband frequency from 0 to 13GHz and a rejection frequency from 15 to 40 GHz. The nominal insertion loss of the filter is 1.2 dB and the typical rejection is 50 dB.

Features:

- Passband Frequency Range DC to 13GHz
- Low Insertion Loss

Applications:

- Instrumentations
- Test Labs
- Sub-assemblies


Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Passband Frequency range	DC		13	GHz
Passband Insertion Loss			1.2	dB
Pass Band Ripple			1.0	dB
Rejection	> 50db@15-33GHz > 30db@33.1-40GHz			dB
Power Handling			15	W
Input VSWR			1.8	:1
Output VSWR			1.8	:1
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Storage Temperature	-40 to +70	°C
Connectors	SMA Female	

外形图 Outline Drawing: Unit:mm

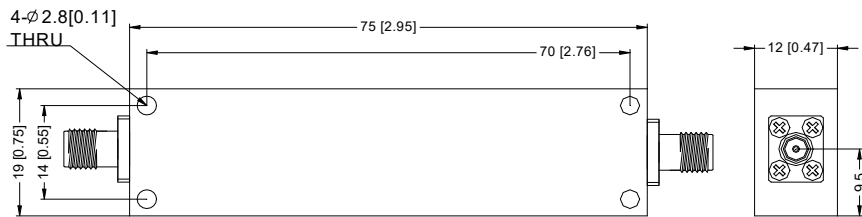


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLLF-DC-13G-X3	Coaxial Low-pass Filter, Passband frequency range: DC-13GHz, Passband Insertion Loss: 1.2dB, SMA Female	Rev.1.0

典型曲线 Typical Performance Data:

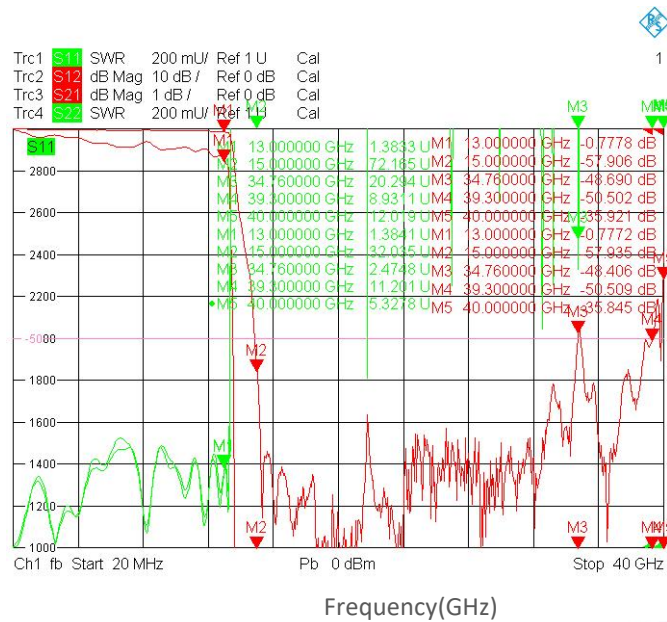

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.