

Part No.: TDC-006052-40N-200-SMD

40.5dB Directional Coupler 0.06-0.52GHz

电气特性 Electrical:


工作频率 Frequency Range: 60-520MHz
 耦合度 Coupling : $40.5 \pm 1.0\text{dB}$
 插入损耗 Insertion Loss: 0.15dB Max
 驻波 VSWR: 1.10:1 Max
 方向性 Directivity: 25.0dB Min
 耐功率 Power Handling: 200 Watt
 阻抗 Impedance: 50 OHMS

机械特性 Mechanical:

温度范围 Temperature Range: $-55^{\circ}\text{C} - +105^{\circ}\text{C}$
 大小 Size: 38.1mm*25.4mm
 厚度 Thickness: 1.8mm
 相对湿度 Relative Humidity: 0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

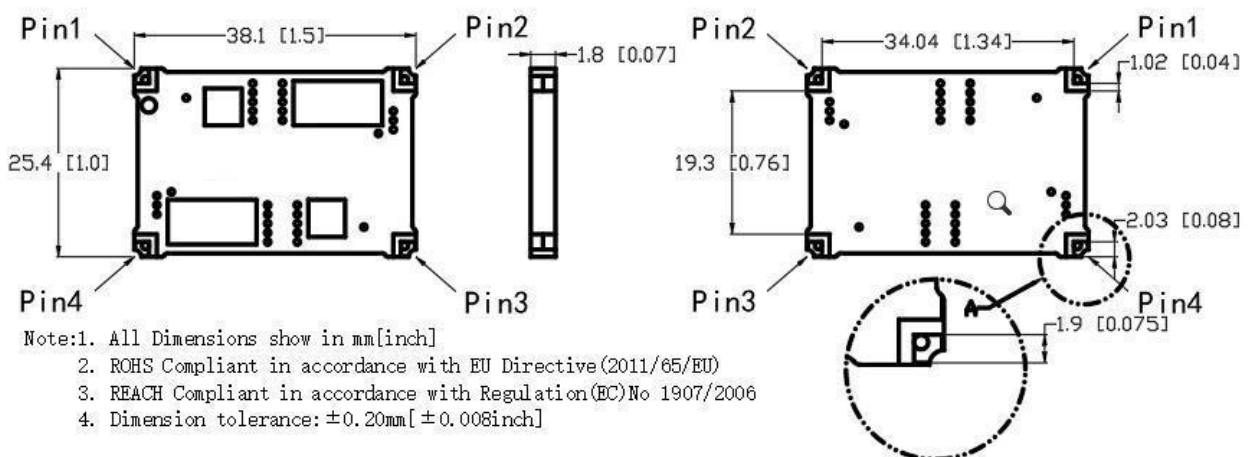

端口配置表 Port Configuration Table:

Hybrid Coupler Pin Configuration




PIN1	PIN2	PIN3	PIN4
Input	Reflected Coupled	Transmission	Forward Coupled
Transmission	Forward Coupled	Input	Reflected Coupled

Typical Performance Data


Frequency	MHz	60	120	180	240	290	340	400	460	520
Coupling	dB	-41.25	-39.69	-39.84	-40.12	-40.21	-40.36	-40.39	-40.34	-40.38
Insertion Loss	dB	-0.013	-0.034	-0.045	-0.054	-0.069	-0.075	-0.093	-0.111	-0.127
Directivity	dB	-26.66	-26.36	-26.56	-26.46	-27.07	-27.26	-26.32	-26.43	-26.37
VSWR	Input	/	1.02	1.02	1.01	1.01	1.00	1.01	1.03	1.06
	Transmission	/	1.02	1.02	1.02	1.03	1.03	1.04	1.05	1.09

典型曲线 Typical Performance Data:


Input VSWR vs Frequency

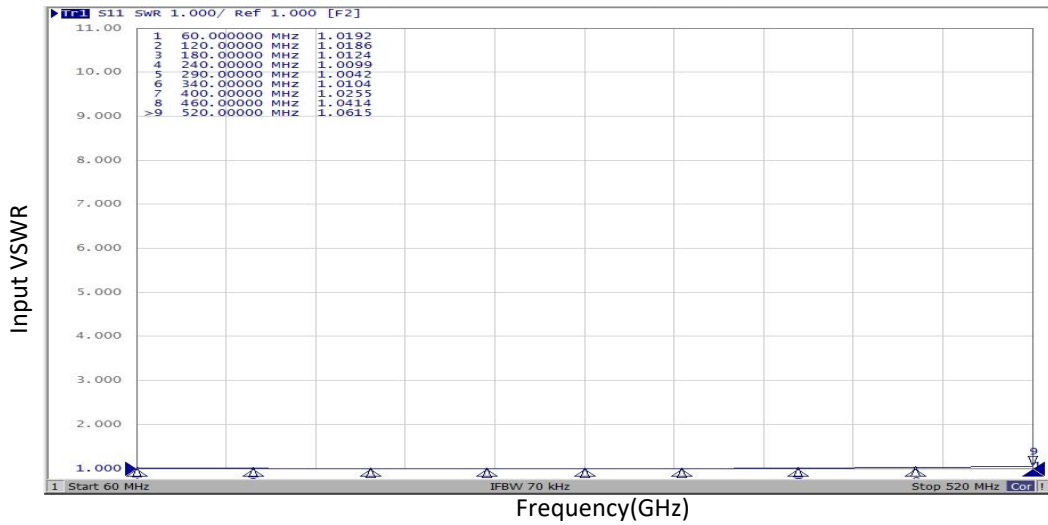

Transmission VSWR vs Frequency

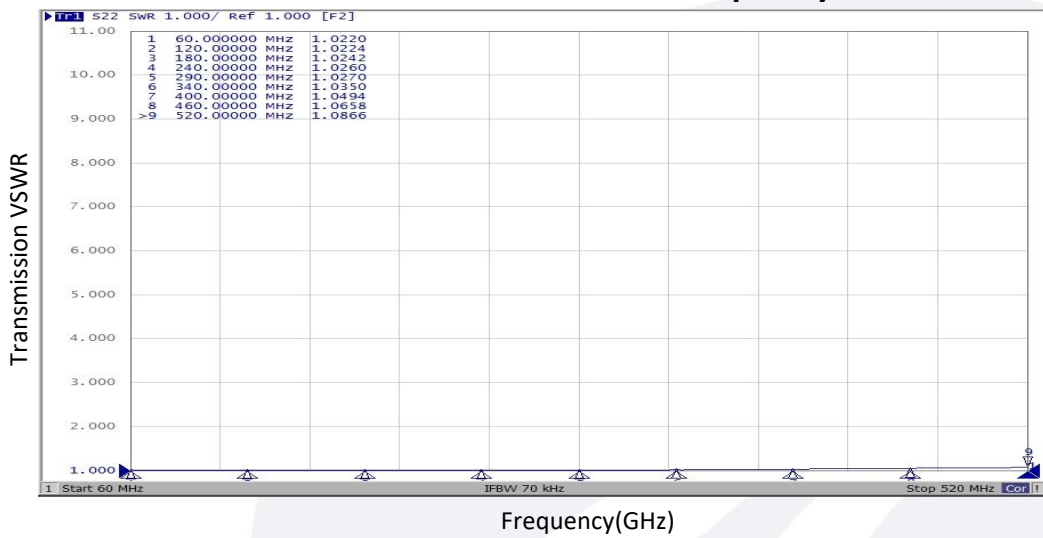


Coupling vs Frequency

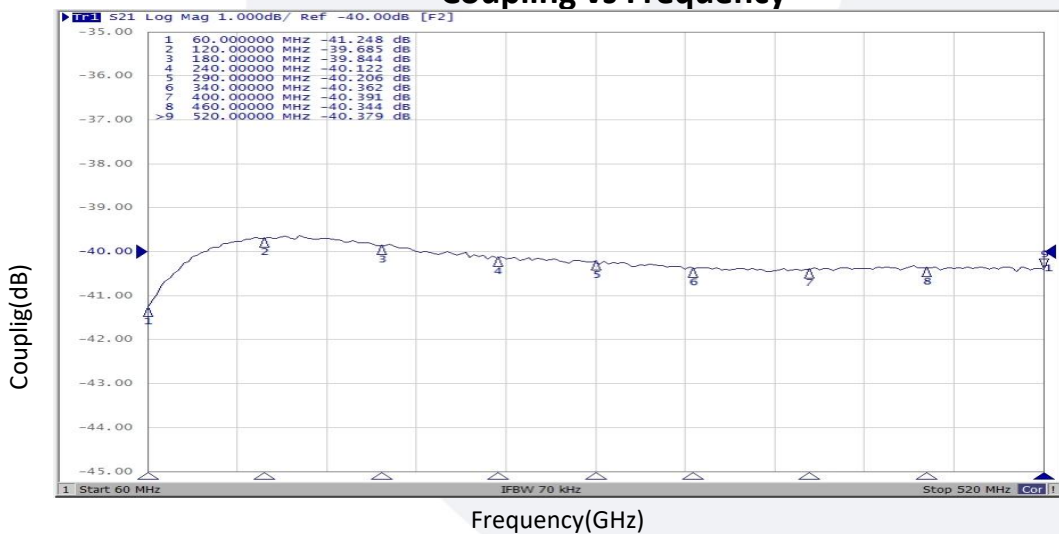

典型曲线 Typical Performance Data:

Isolation vs Frequency

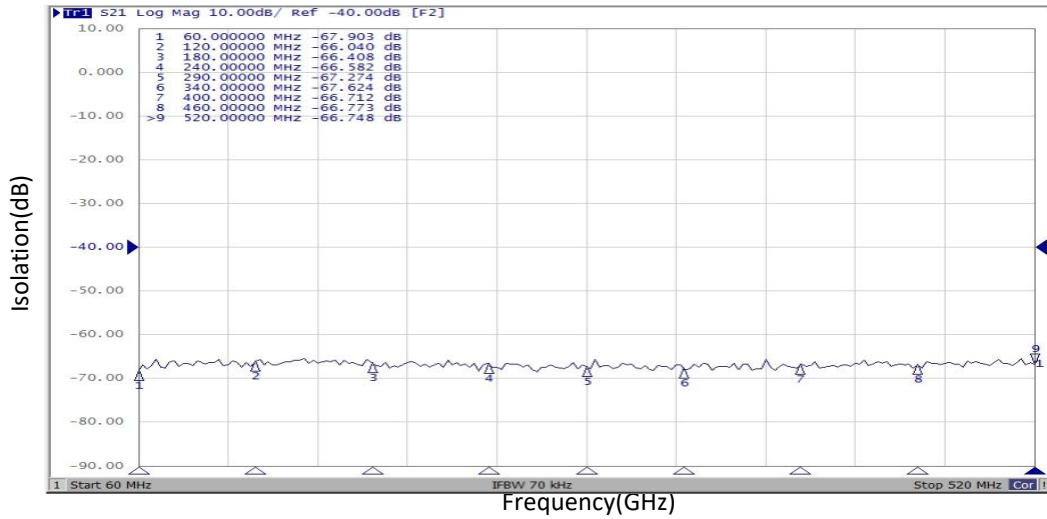

Insertion Loss vs Frequency

