

Coaxial Band-pass Filter

8.5-9GHz/ SMA Female

Model: TLBF-8G5-9G-E

TLBF-8G5-9G-E is a coaxial band-pass filter with a passband frequency from 8.5 to 9 GHz and a rejection frequencies from 0 to 7.75 GHz and 9.75-16GHz. The nominal insertion loss of the filter is 1.0 dB and the typical rejection is 50 dB.

Features:

- Passband Frequency Range: 8.5 to 9 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations


电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	8.5		9	GHz
通带插损 Passband Insertion Loss			1.0	dB
带内纹波 Pass Band Ripple			0.8	dB
带外抑制 Rejection	>50dB@DC-7750MHz 9750-16000MHz			dB
耐受功率 Power Handling			50	W
输入驻波 Input VSWR			1.5	:1
输出驻波 Output VSWR			1.5	:1
阻抗 Impedance	50			Ohms

环境和机械特性 Envirionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temperature	-40 To +70	℃
存储温度 Storage Temperature	-40 to +70	℃
接口 Connectors	SMA Female	

外形图 Outline Drawing: Unit:mm;

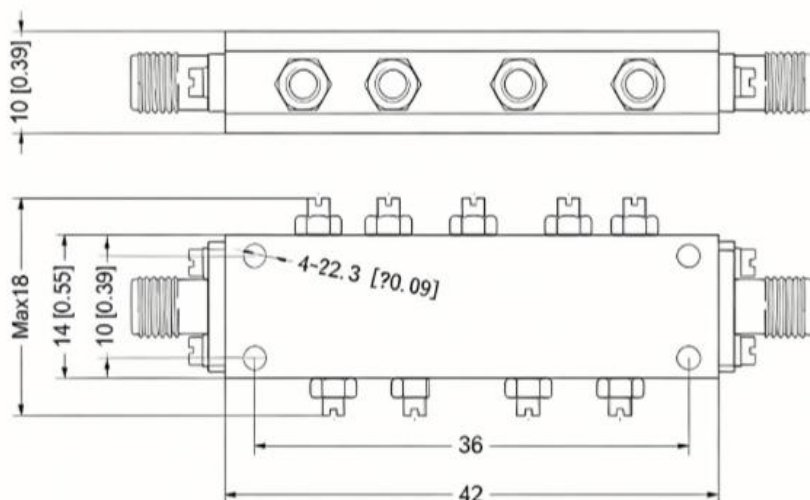

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-8G5-9G-E	Coaxial Band-pass Filter, Passband frequency range: 8.5 to 9GHz, Passband Insertion Loss: 1.0dB, SMA Female	Rev.1.0