

Coaxial High-pass Filter

1.6-6 GHz/SMA Female

Model: THF-016-2S

THF-016-2S is a coaxial High-pass filter with a passband frequency from 1.6 to 6 GHz and a rejection frequency from DC to 1.1 GHz. The maximum insertion loss of the filter is 1.0 dB and the minimum rejection is 50 dB.

Features:

- Passband Frequency Range 1.6 to 6GHz
- Low Insertion Loss

Applications:

- Instrumentations
- Test Labs
- Sub-assemblies

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	1.6		6	GHz
Passband Insertion Loss			1.0	dB
Pass Band Ripple			1.0	dB
VSWR			1.8	:1
Rejection@DC-1.1GHz	50			dB
Power Handling			10	W
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Connectors	SMA Female	
Size	10*30*50	mm

Outline Drawing:

Unit:mm

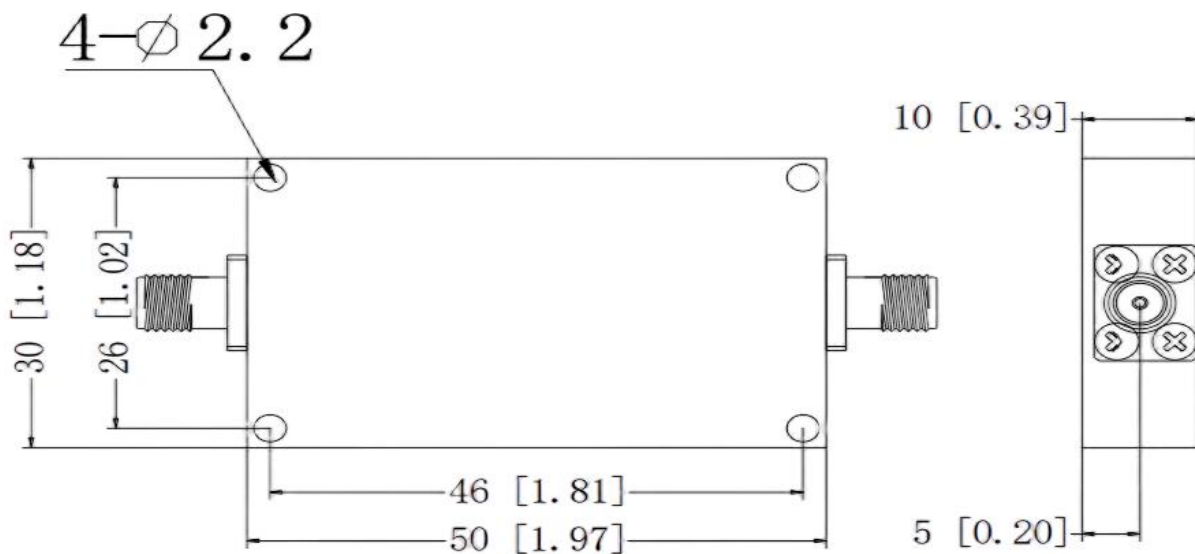


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
THF-016-2S	Coaxial High-pass Filter, Passband frequency range: 1.6-6GHz, Passband Insertion Loss: 1.0dB, SMA Female Coaxial Fixed Termination	Rev.1.1

Typical Performance Data:

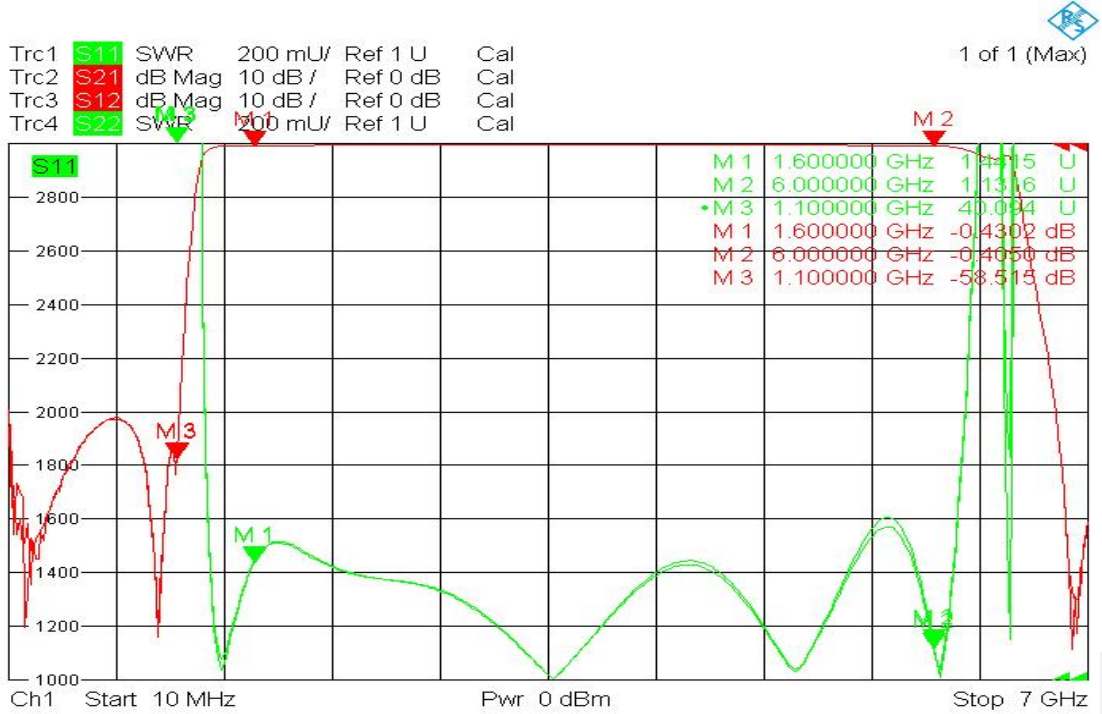

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.