

Coaxial Band-pass Filter

5-6 GHz/SMA Female

Model: TLBF-5G-6G-E2

TLBF-5G-6G-E2 is a coaxial band-pass filter with a passband frequency from 5 to 6 GHz and a rejection frequencies from 4.5 GHz to 6.5 GHz. The maximum insertion loss of the filter is 1.8 dB and the typical rejection is 40 dB.

Features:

- Passband Frequency Range 5 to 6 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts
- Field Replaceable RF Connectors

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	5		6	GHz
Band Width			1	GHz
Passband Insertion Loss			1.8	dB
Pass Band Ripple			1.6	dB
Rejection	>40dB@Fc±500Mhz			dB
Power Handling			50	W
VSWR			1.6	:1
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Connectors	SMA Female	

Outline Drawing:

Unit:mm

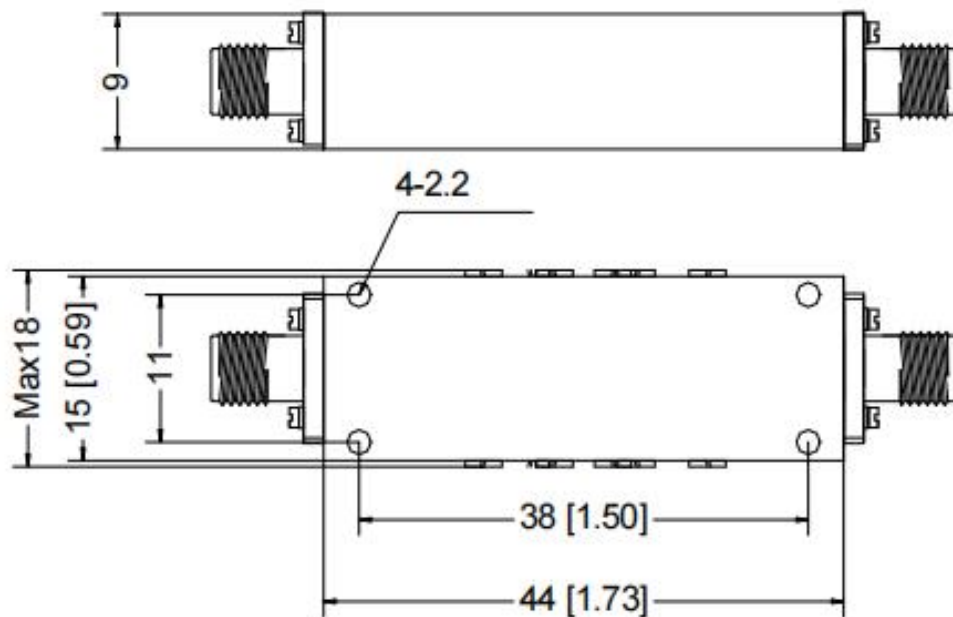


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-5G-6G-E2	Coaxial Band-pass Filter, Passband frequency range: 5-6GHz, Passband Insertion Loss: 1.8dB, SMA Female	Rev.1.0

Typical Performance Data:

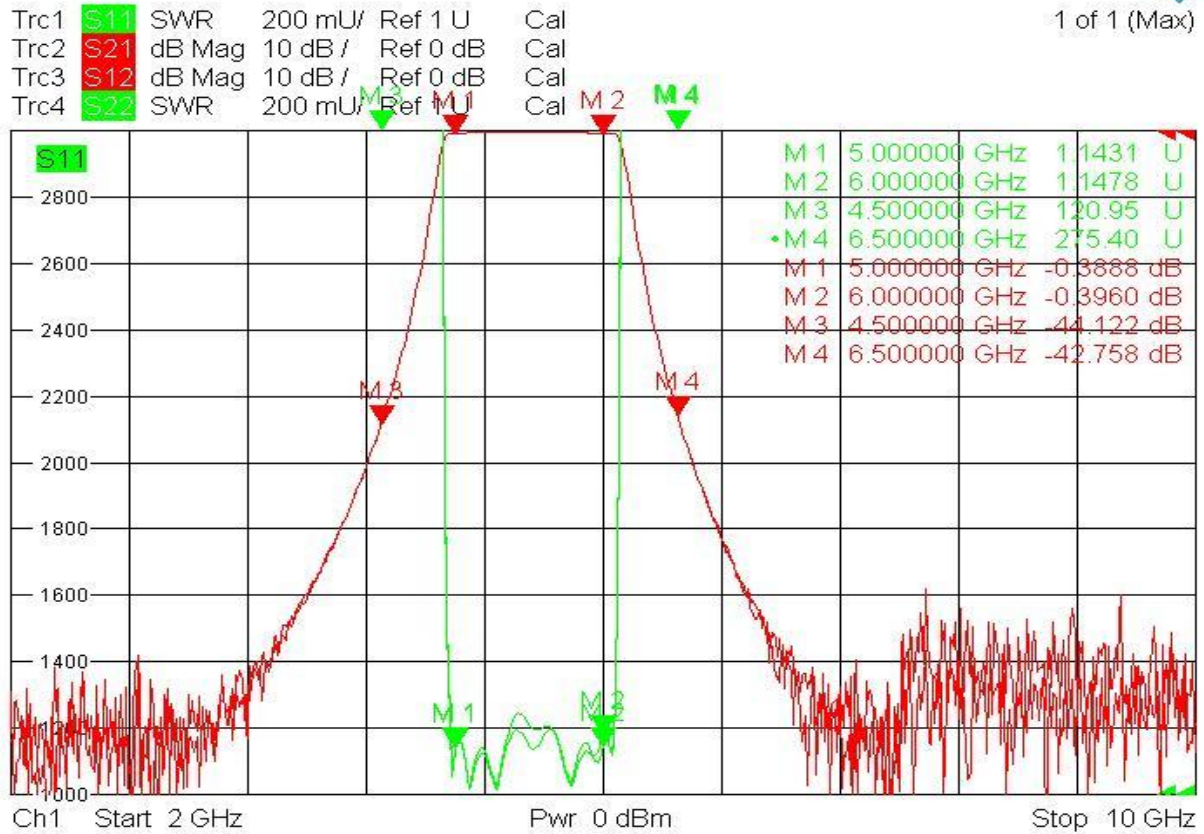

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.