

DPDT Coaxial Switches

R22-KF12T40-D, Coaxial Switches, DPDT, 2.92mm, Failsafe, 12VDC, TTL, DC to 40 GHz, DSUB-9, Electronic Type Indicator

R22-KF24T40-D, Coaxial Switches, DPDT, 2.92mm, Failsafe, 24VDC, TTL, DC to 40 GHz, DSUB-9, Electronic Type Indicator

R22-KF28T40-D, Coaxial Switches, DPDT, 2.92mm, Failsafe, 28VDC, TTL, DC to 40 GHz, DSUB-9, Electronic Type Indicator

电气参数 Electrical Characteristics:

参数Parameter	条件Condition		
频率范围 Frequency range	DC-40 GHz		
阻抗 Impedance	50 Ω		
开关模式 Operation mode	Failsafe		
开关顺序 Switch sequence	Break before make		
切换时间 Switching time	15 ms max		
机械寿命 Mechanical life	1 million min		
TTL input	0-0.8 V(OFF), 2.4-5 V(ON)		
额定电压 Rated voltage	12	24	28 VDC
工作电流 Operating current at 23 °C	380	200	180 mA
指示灯额定值 Indicator rating	Electronic Type Indicator Max withstand voltage: 60VDC Max current capacity: 100mA Max "ON" resistance: 16 Ω Note: VDCi and COM- must be connected to operate.		




射频特性 RF Specifications:

频率范围 FREQUENCY RANGE(GHz)	DC-6	6-12	12-18	18-26.5	26.5-40
插入损耗 INSERTION LOSS (MAX) dB	0.2	0.25	0.4	0.9	1.3
隔离度 ISOLATION (MIN) dB	70	70	60	55	50
电压驻波比 V.S.W.R. (MAX)	1.3	1.4	1.5	1.7	2.0



环境和物理特性 Envriionmental And Physical Characteristics:

参数Parameter	条件 Condition
工作温度范围 Operating temperature range	-25°C to +65°C(Standard) -55°C to +85°C(Optional)
振动 Sine vibration(Operating)	20-2000Hz , 10g
冲击 Shocks(Non Operating)	50g / 11ms, ½ sine
射频接口 RF Connector type	2.92mm Female
控制接口 Control connector	D-SUB 9 Pin Male
重量 Weight	120g Max

外形尺寸 Outline Drawing: Unit: mm

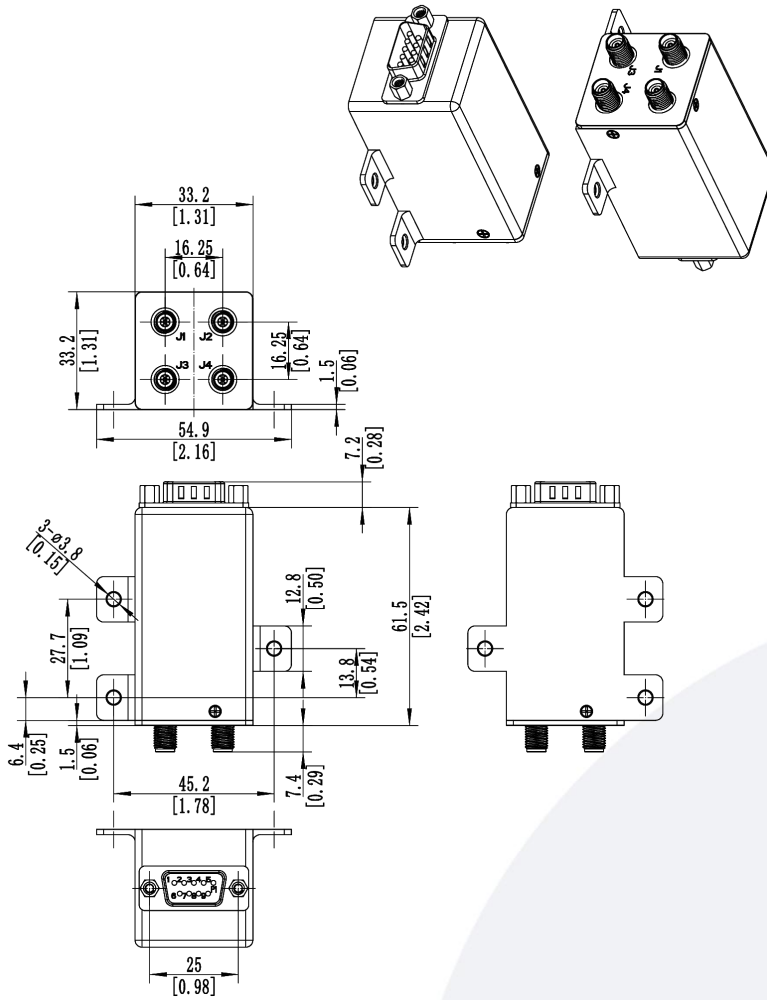

原理图 Schematic:

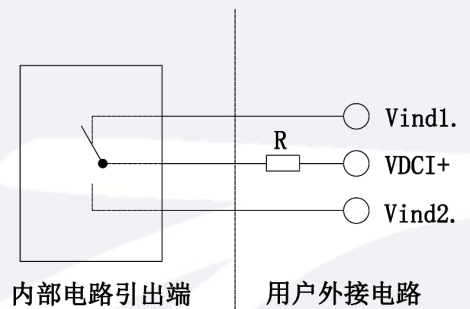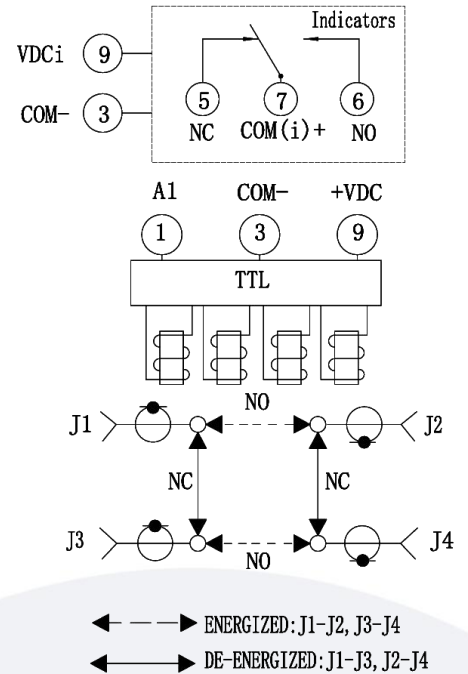


电子式指示灯电路接线图


功率曲线图 Average power:

This graph is based on the following conditions:

- Ambient temperature: + 25 °C
- Sea level
- V.S.W.R.: 1 and cold switching

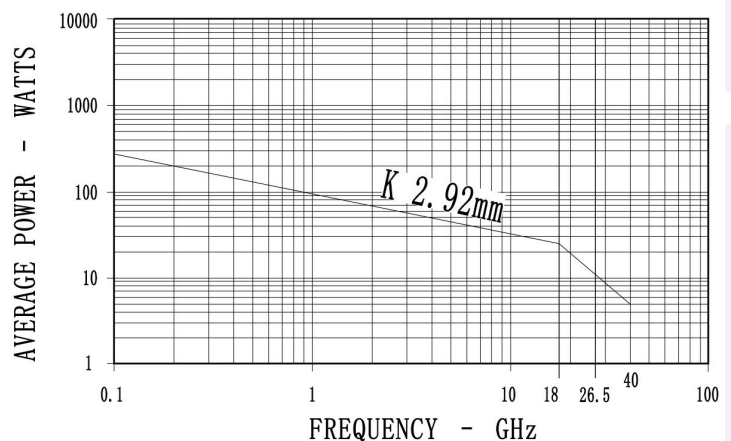

针脚定义 Pin Definition:

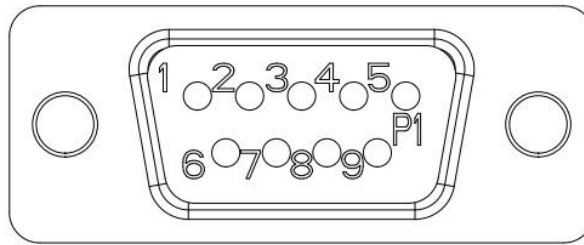


9 PIN D-SUB		RF Connect Used
Pin NO.	Function	DPDT
1	A1(TTL IN)	NO:J1-J2,J3-J4
	0	NC:J1-J3,J2-J4
2	UNUSED	
3	COM-	
4	UNUSED	
5	1(IND.)	NC:J1-J3,J2-J4
6	2(IND.)	NO:J1-J2,J3-J4
7	COMi(IND)(V+)	
8	UNUSED	
9	+VDC/VDCi	

标准型号 Part Number:


标准型号 Part Number	驱动电压 Actuator voltage	可选项 Option
DPDT		
R22-KF12T40-DI	12VDC	-S 例如:R22-KF12T40-DIS (备注, S型号满足IP65)
R22-KF24T40-DI	24VDC	
R22-KF28T40-DI	28VDC	

典型曲线 Typical Performance Data:

VSWR

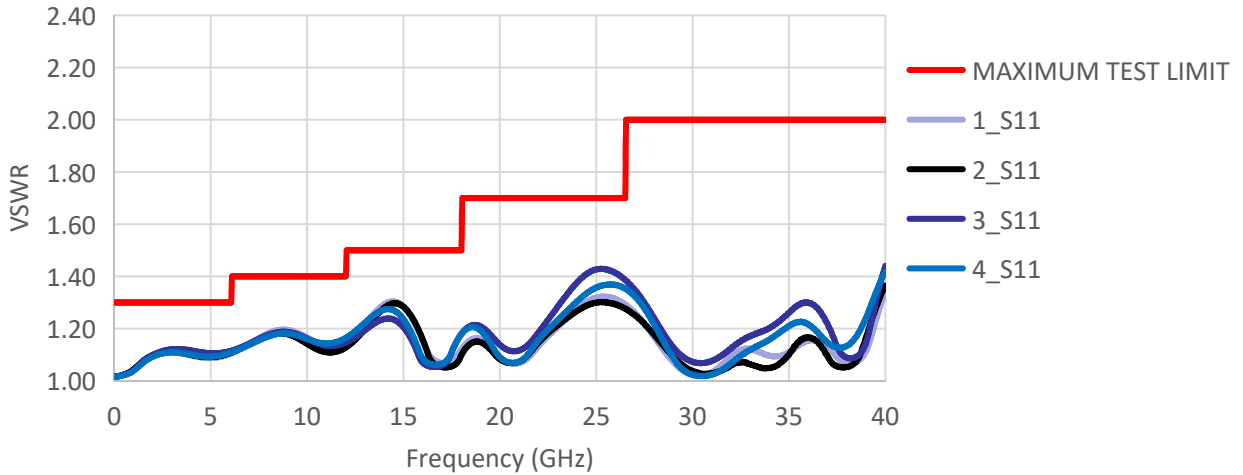

INSERTION LOSS

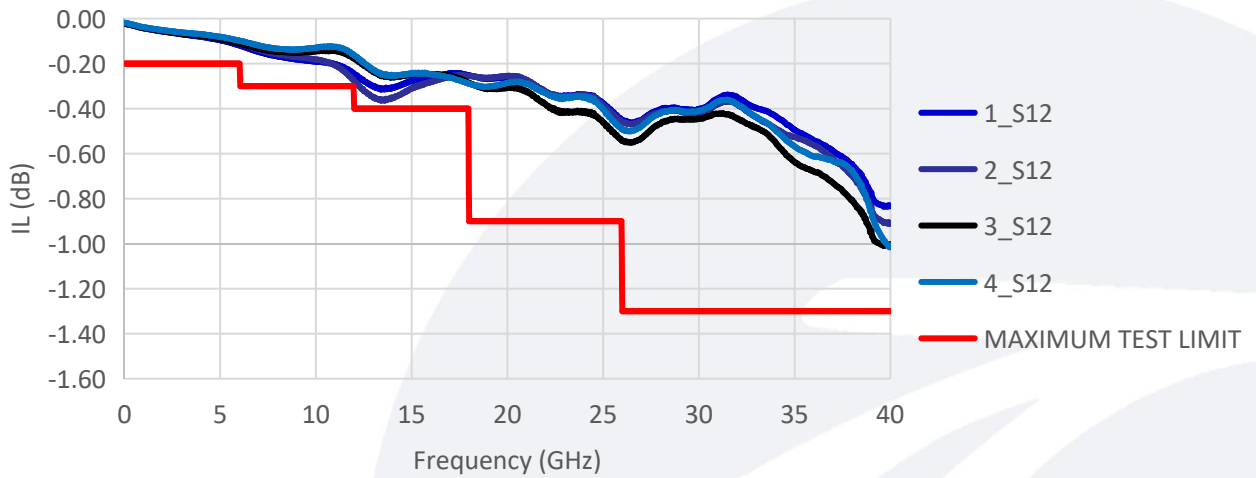

ISOLATION

