

DPDT Coaxial Switches

R22-SF12018-D , Coaxial Switches , DPDT , SMA , Failsafe , 12VDC , DC to 18 GHz , DSUB-9

R22-SF24018-D , Coaxial Switches , DPDT , SMA , Failsafe , 24VDC , DC to 18 GHz , DSUB-9

R22-SF28018-D , Coaxial Switches , DPDT , SMA , Failsafe , 28VDC , DC to 18 GHz , DSUB-9

电气参数 Electrical Characteristics:

参数Parameter	条件Condition		
频率范围 Frequency range	DC-18GHz		
阻抗 Impedance	50 Ω		
开关模式 Operation mode	Failsafe		
开关顺序 Switch sequence	Break before make		
切换时间 Switching time	15 ms max		
机械寿命 Mechanical life	2 million min		
额定电压 Rated voltage	12	24	28 VDC
工作电流 Operating current at 23 °C	380	200	180 mA




射频特性 RF Specifications:

频率范围 FREQUENCY RANGE(GHz)	DC-6	6-12	12-18
插入损耗INSERTION LOSS (MAX) dB	0.2	0.25	0.4
隔离度 ISOLATION (MIN) dB	70	70	60
电压驻波比 V.S.W.R. (MAX)	1.3:1	1.4:1	1.5:1


环境和物理特性 Envriionmental And Physical Characteristics:

参数Parameter	条件 Condition
工作温度范围 Operating temperature range	-25°C to +65°C(Standard) -55°C to +85°C(Optional)
振动 Sine vibration(Operating)	20-2000Hz , 10g
冲击 Shocks(Non Operating)	50g / 11ms, ½ sine
射频接口 RF Connector type	SMA Female
控制接口 Control connector	D-SUB 9 Pin Male
重量 Weight	120g Max

外形尺寸 Outline Drawing: Unit: mm

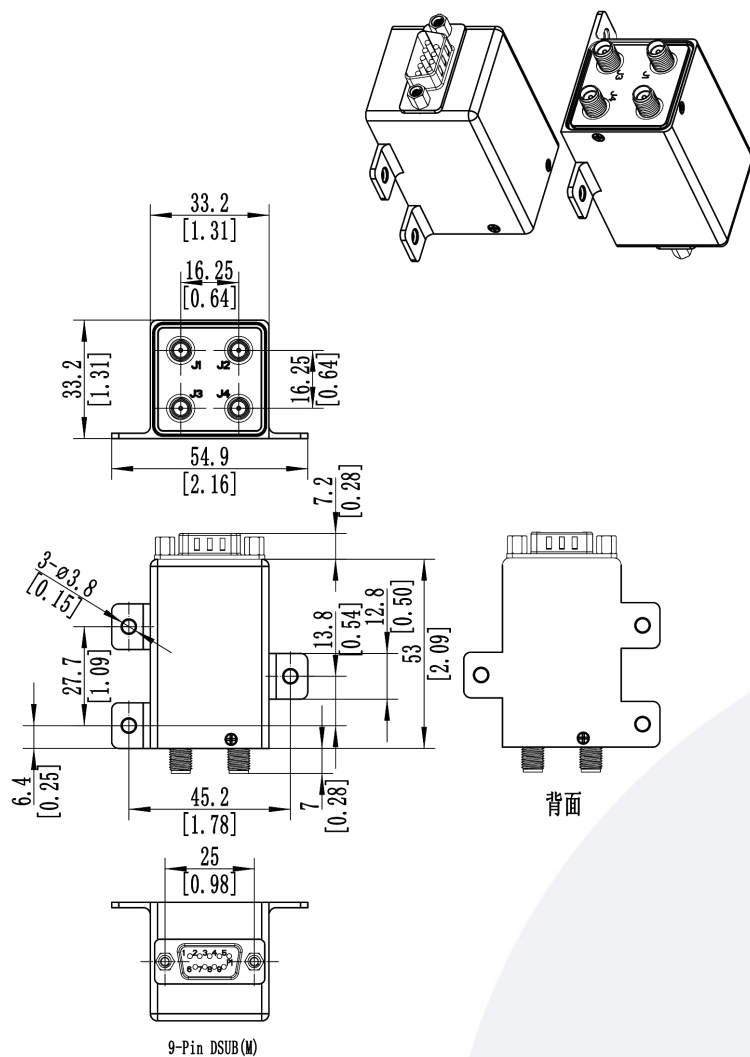


原理图 Schematic:

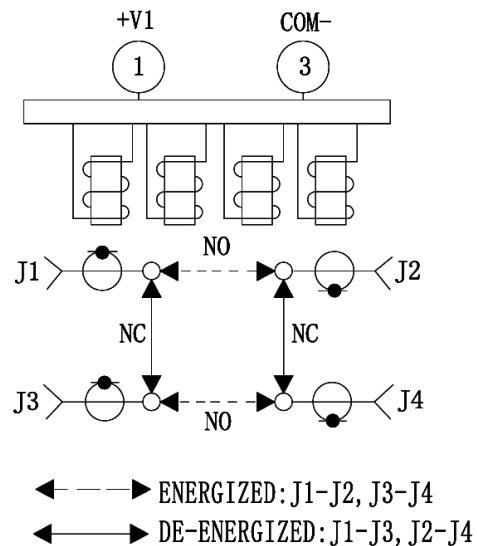


功率曲线图 Average power:

This graph is based on the following conditions:

- Ambient temperature: + 25 °C
- Sea level
- V.S.W.R.: 1 and cold switching

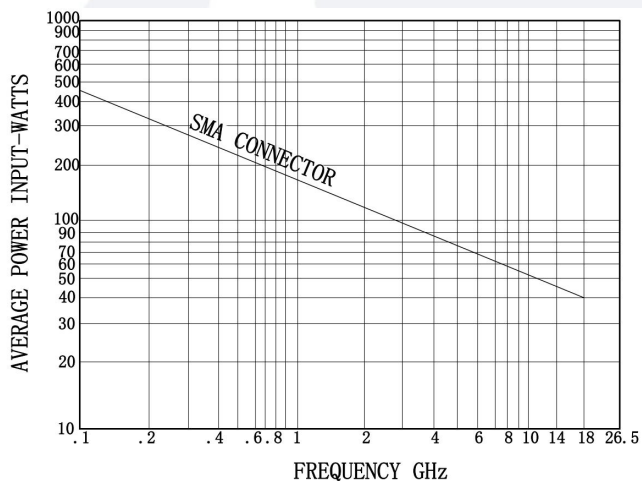

针脚定义 Pin Definition:

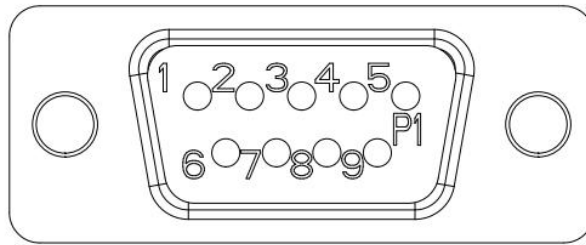


9 PIN D-SUB		RF Connect Used
Pin NO.	Function	DPDT
1	+V1	NO:J1-J2,J3-J4
	0	NC:J1-J3,J2-J4
2	UNUSED	
3	COM-	
4-9	UNUSED	

标准型号 Part Number:


标准型号 Part Number	驱动电压 Actuator voltage	可选项 Option
DPDT		
R22-SF12018-D	12VDC	-S 例如:R22-SF12018-DS (备注, S型号满足IP65)
R22-SF24018-D	24VDC	
R22-SF28018-D	28VDC	

典型曲线 Typical Performance Data:

VSWR

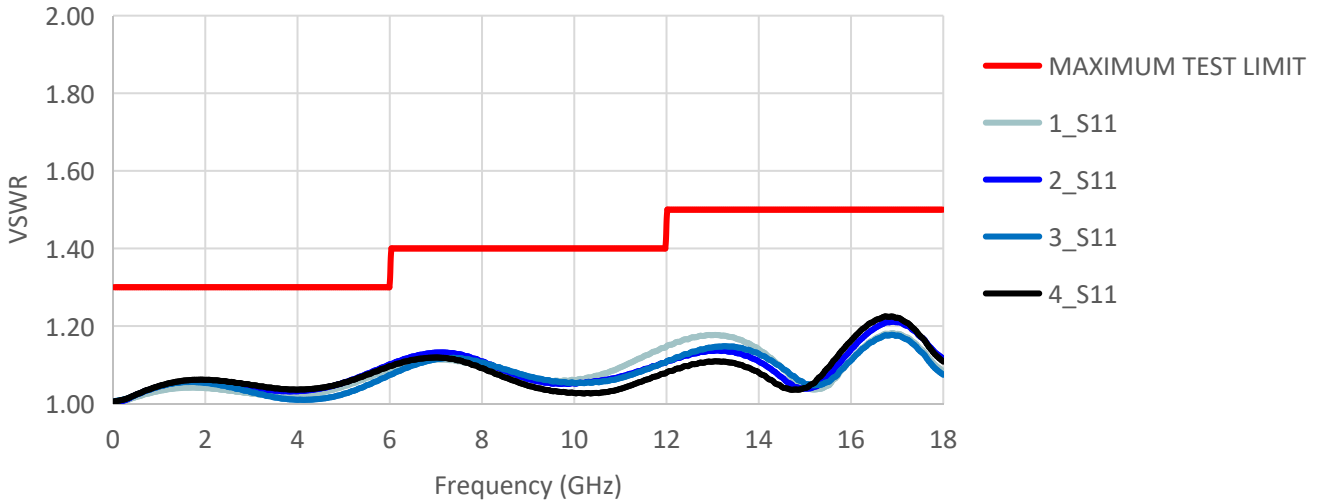

INSERTION LOSS

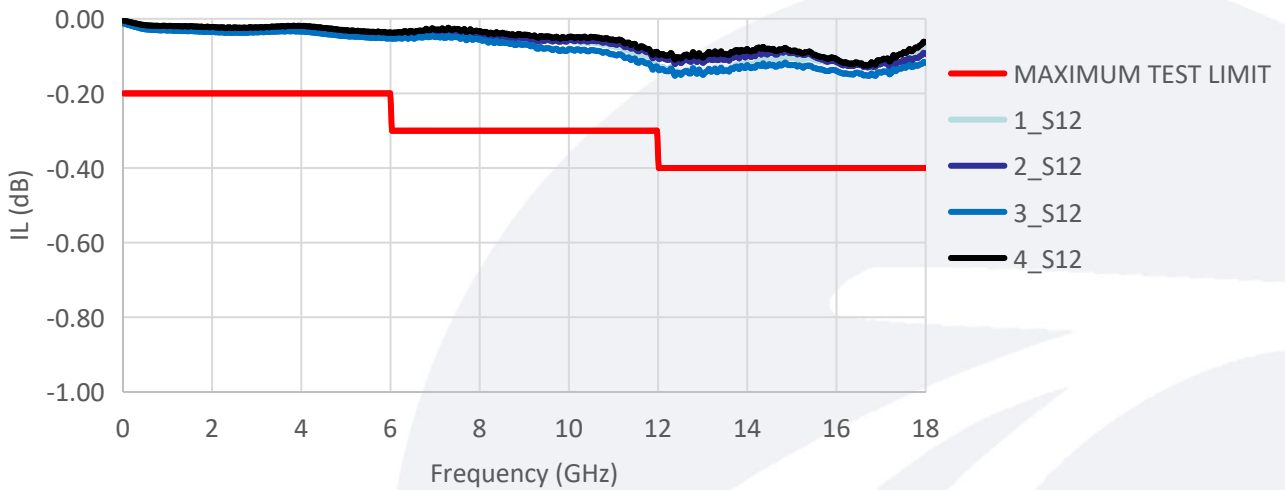

ISOLATION

