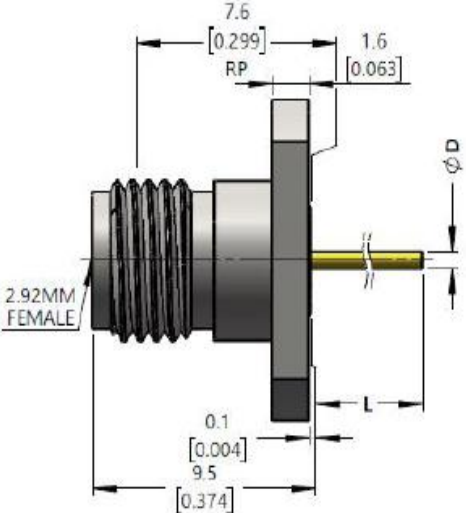
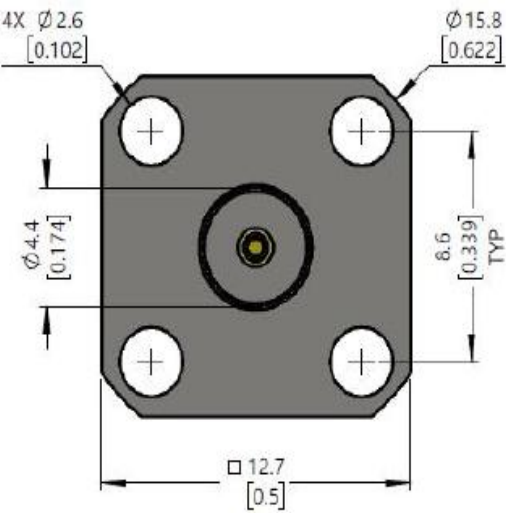


D					<table> <tr> <th>No.</th><th>Model</th><th>D(Diameter)</th><th>L(Length)</th></tr> <tr><td>1</td><td>2. 92-KFD50109-127</td><td>0.23 [0.009]</td><td>0.5 [0.020]</td></tr> <tr><td>2</td><td>2. 92-KFD50109-039</td><td>0.23 [0.009]</td><td>1 [0.039]</td></tr> <tr><td>3</td><td>2. 92-KFD50112-011</td><td>0.30 [0.012]</td><td>0.3 [0.012]</td></tr> <tr><td>4</td><td>2. 92-KFD50112-019</td><td>0.30 [0.012]</td><td>0.5 [0.020]</td></tr> <tr><td>5</td><td>2. 92-KFD50112-059</td><td>0.30 [0.012]</td><td>1.5 [0.059]</td></tr> <tr><td>6</td><td>2. 92-KFD50112-079</td><td>0.30 [0.012]</td><td>2 [0.079]</td></tr> <tr><td>7</td><td>2. 92-KFD50112</td><td>0.30 [0.012]</td><td>7 [0.276]</td></tr> <tr><td>8</td><td>2. 92-KFD50112-354</td><td>0.30 [0.012]</td><td>9 [0.354]</td></tr> <tr><td>9</td><td>2. 92-KFD50112-472</td><td>0.30 [0.012]</td><td>12 [0.472]</td></tr> <tr><td>10</td><td>2. 92-KFD50112-50</td><td>0.30 [0.012]</td><td>12.7 [0.500]</td></tr> <tr><td>11</td><td>2. 92-KFD50117-269</td><td>0.44 [0.017]</td><td>6.84 [0.269]</td></tr> <tr><td>12</td><td>2. 92-KFD50117-295</td><td>0.44 [0.017]</td><td>7.5 [0.295]</td></tr> <tr><td>13</td><td>2. 92-KFD50120-590</td><td>0.50 [0.020]</td><td>15 [0.590]</td></tr> <tr><td>14</td><td>2. 92-KFD5012502</td><td>0.64 [0.025]</td><td>6.84 [0.269]</td></tr> <tr><td>15</td><td>2. 92-KFD5012501</td><td>0.64 [0.025]</td><td>10.92 [0.430]</td></tr> <tr><td>16</td><td>2. 92-KFD50125-1181</td><td>0.64 [0.025]</td><td>30 [1.181]</td></tr> <tr><td>17</td><td>2. 92-KFD50130</td><td>0.75 [0.030]</td><td>30 [1.181]</td></tr> <tr><td>18</td><td>2. 92-KFD50143-590</td><td>1.10 [0.043]</td><td>15 [0.590]</td></tr> <tr><td>19</td><td>2. 92-KFD50150-319</td><td>1.27 [0.050]</td><td>8.1 [0.319]</td></tr> <tr><td>20</td><td>2. 92-KFD50150-314</td><td>1.27 [0.050]</td><td>8 [0.314]</td></tr> <tr><td>21</td><td>2. 92-KFD50150-393</td><td>1.27 [0.050]</td><td>10 [0.393]</td></tr> </table>				No.	Model	D(Diameter)	L(Length)	1	2. 92-KFD50109-127	0.23 [0.009]	0.5 [0.020]	2	2. 92-KFD50109-039	0.23 [0.009]	1 [0.039]	3	2. 92-KFD50112-011	0.30 [0.012]	0.3 [0.012]	4	2. 92-KFD50112-019	0.30 [0.012]	0.5 [0.020]	5	2. 92-KFD50112-059	0.30 [0.012]	1.5 [0.059]	6	2. 92-KFD50112-079	0.30 [0.012]	2 [0.079]	7	2. 92-KFD50112	0.30 [0.012]	7 [0.276]	8	2. 92-KFD50112-354	0.30 [0.012]	9 [0.354]	9	2. 92-KFD50112-472	0.30 [0.012]	12 [0.472]	10	2. 92-KFD50112-50	0.30 [0.012]	12.7 [0.500]	11	2. 92-KFD50117-269	0.44 [0.017]	6.84 [0.269]	12	2. 92-KFD50117-295	0.44 [0.017]	7.5 [0.295]	13	2. 92-KFD50120-590	0.50 [0.020]	15 [0.590]	14	2. 92-KFD5012502	0.64 [0.025]	6.84 [0.269]	15	2. 92-KFD5012501	0.64 [0.025]	10.92 [0.430]	16	2. 92-KFD50125-1181	0.64 [0.025]	30 [1.181]	17	2. 92-KFD50130	0.75 [0.030]	30 [1.181]	18	2. 92-KFD50143-590	1.10 [0.043]	15 [0.590]	19	2. 92-KFD50150-319	1.27 [0.050]	8.1 [0.319]	20	2. 92-KFD50150-314	1.27 [0.050]	8 [0.314]	21	2. 92-KFD50150-393	1.27 [0.050]	10 [0.393]
No.	Model	D(Diameter)	L(Length)																																																																																													
1	2. 92-KFD50109-127	0.23 [0.009]	0.5 [0.020]																																																																																													
2	2. 92-KFD50109-039	0.23 [0.009]	1 [0.039]																																																																																													
3	2. 92-KFD50112-011	0.30 [0.012]	0.3 [0.012]																																																																																													
4	2. 92-KFD50112-019	0.30 [0.012]	0.5 [0.020]																																																																																													
5	2. 92-KFD50112-059	0.30 [0.012]	1.5 [0.059]																																																																																													
6	2. 92-KFD50112-079	0.30 [0.012]	2 [0.079]																																																																																													
7	2. 92-KFD50112	0.30 [0.012]	7 [0.276]																																																																																													
8	2. 92-KFD50112-354	0.30 [0.012]	9 [0.354]																																																																																													
9	2. 92-KFD50112-472	0.30 [0.012]	12 [0.472]																																																																																													
10	2. 92-KFD50112-50	0.30 [0.012]	12.7 [0.500]																																																																																													
11	2. 92-KFD50117-269	0.44 [0.017]	6.84 [0.269]																																																																																													
12	2. 92-KFD50117-295	0.44 [0.017]	7.5 [0.295]																																																																																													
13	2. 92-KFD50120-590	0.50 [0.020]	15 [0.590]																																																																																													
14	2. 92-KFD5012502	0.64 [0.025]	6.84 [0.269]																																																																																													
15	2. 92-KFD5012501	0.64 [0.025]	10.92 [0.430]																																																																																													
16	2. 92-KFD50125-1181	0.64 [0.025]	30 [1.181]																																																																																													
17	2. 92-KFD50130	0.75 [0.030]	30 [1.181]																																																																																													
18	2. 92-KFD50143-590	1.10 [0.043]	15 [0.590]																																																																																													
19	2. 92-KFD50150-319	1.27 [0.050]	8.1 [0.319]																																																																																													
20	2. 92-KFD50150-314	1.27 [0.050]	8 [0.314]																																																																																													
21	2. 92-KFD50150-393	1.27 [0.050]	10 [0.393]																																																																																													
C	Electrical & Environmental Characteristics <table> <tr><td>Impedance</td><td>50 Ω</td></tr> <tr><td>Insulation Resistance</td><td>5000 MΩ</td></tr> <tr><td>Operating Frequency</td><td>DC~40GHz</td></tr> <tr><td>Dielectric Withstanding Voltage</td><td>1000V</td></tr> <tr><td>VSWR</td><td>≤1.15</td></tr> <tr><td>Insertion Loss</td><td>≤0.05*Sqt(f_GHz)</td></tr> <tr><td>Operating Temperature</td><td>- 55~+165℃</td></tr> </table>		Impedance	50 Ω	Insulation Resistance	5000 MΩ	Operating Frequency	DC~40GHz	Dielectric Withstanding Voltage	1000V	VSWR	≤1.15	Insertion Loss	≤0.05*Sqt(f_GHz)	Operating Temperature	- 55~+165℃	THIS DRAWING IS A CONTROLLED DOCUMENT Unit mm TOLERANCES UNLESS OTHERWISE SPECIFIED 0 PLC ±0.25 1 PLC ±0.15 2 PLC ±0.12 3 PLC ±- 3 PLC ±- ANGLES ±1°		Suzhou Talent Microwave,Inc Product Model 2.92-KFD50112-019 2.92mm Female Flange Connector																																																																													
Impedance	50 Ω																																																																																															
Insulation Resistance	5000 MΩ																																																																																															
Operating Frequency	DC~40GHz																																																																																															
Dielectric Withstanding Voltage	1000V																																																																																															
VSWR	≤1.15																																																																																															
Insertion Loss	≤0.05*Sqt(f_GHz)																																																																																															
Operating Temperature	- 55~+165℃																																																																																															
B	Material & Coat-Plating <table> <tr><td>Inner Conductor</td><td>Beryllium Copper, Gold</td></tr> <tr><td>Dielectric</td><td>PEI 1000</td></tr> <tr><td>Body</td><td>Stainless Steel,Passivated</td></tr> <tr><td>Coupling Nut</td><td>N/A</td></tr> </table>		Inner Conductor	Beryllium Copper, Gold	Dielectric	PEI 1000	Body	Stainless Steel,Passivated	Coupling Nut	N/A	MATERIAL SEE TABLE FINISH SEE TABLE		APVD PRODUCT SPEC APPLICATIO N SPEC SIZE A4 GAGE CODE 0T8L4 DRAWING NO																																																																																			
Inner Conductor	Beryllium Copper, Gold																																																																																															
Dielectric	PEI 1000																																																																																															
Body	Stainless Steel,Passivated																																																																																															
Coupling Nut	N/A																																																																																															
A					WEIGHT CUSTOMER DRAWING																																																																																											
					SHEET1 OF 1 RVE 1																																																																																											