

Model:TLSM-050075-06-15**V-band Spectrum Frequency Extension Systems
50-75 GHz,WR-15****Feature:**

- Ultra Wide Band: 50-75 GHz
- Low conversion loss
- Unconditional stability
- High performance alternative to harmonic mixers

Electrical Specifications:

Parameter	Min	Typ	Max	Units
Frequency range	50		75	GHz
IF Output Frequency	DC		5	GHz
LO Input Frequency	8.33		12.5	GHz
LO Multiplication Factor		6		
Mixer Conversion Loss SSB		8		dB
LO Input Power	13	15	20	dBm
RF Input Power		-10	0	dBm

Mechanical Specifications:


Parameter	Value
RF Input Connector	WR-15/UG-385/U
LO/IF Port	SMA Female
LO Input Connector	SMA Female
IF Input Connector	SMA Female
Power Supply Pin	FGG 0B 4 Core
Size	199mm*68mm*83mm

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	240 V
RF Input Power	+10 dBm


Outline Drawing:

Unit: mm

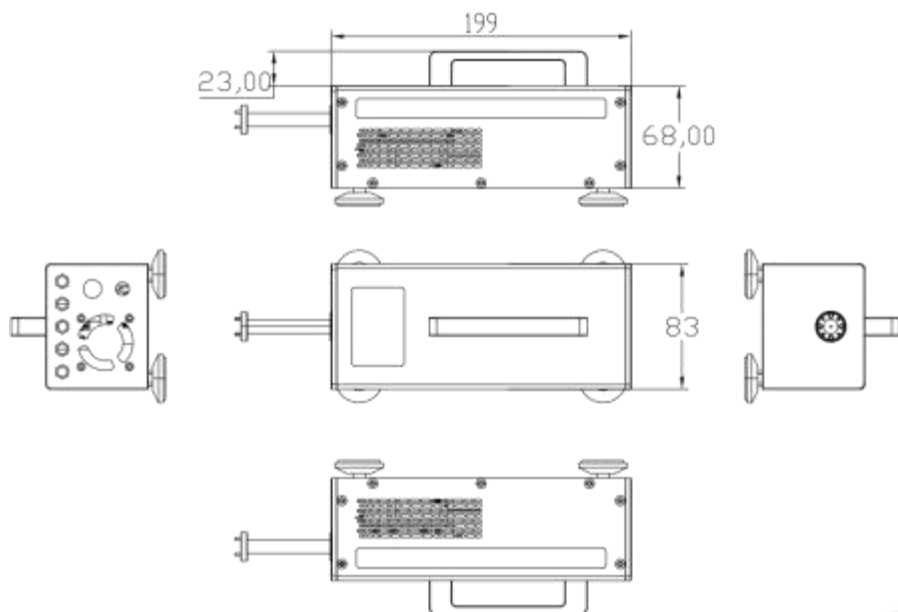

TLSM-050075-06-15

Block Diagrams:

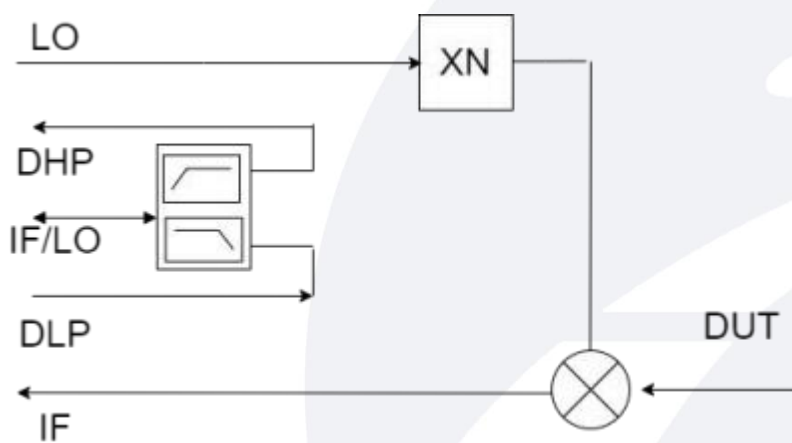

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	0		+50	°C
Non-operating Temperature	-45		+125	°C
Relative humidity		95		%
Altitude	50,000			feet
Shock / Vibration(MIL-STD-810F)	20g,11ms,saw-tooth			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Part Number	Description	Revision
TLSM-050075-06-15	V-band Spectrum Frequency Extension Systems, 50-75GHz, Mixer Conversion Loss SSB:8dB	Rev.1.1

Components Included:

Part Number	Description	Quantity
TLACTDC-22012	AC to DC Power Adapter	1 PCS

Notes:

1. Dimensions and specifications may be changed without prior notice.
2. Standard Warranty:three years.