

Model:TLDA0.1G50G-62-6

Digital Attenuator
0.1-50 GHz, 6-Bit, 0.5 dB LSB, 62 dB Range

Feature:

- Ultra Wide Band: 0.1-50GHz
- 2 channel, 6-Bit, 0.5 dB LSB, 62 dB Range
- Low Insertion Loss
- High Attenuator Accuracy

电气特性 Electrical Specifications:

参数Parameter		Min	Typ	Max	单位Units
频率范围 Frequency range		0.1-50			GHz
插损 Insertion Loss	@0.1-20GHz		10		dB
	@20-40GHz		15		
	@40-50GHz		20		
衰减范围 Attenuation Range		62			dB
控制位数 Control Bit TTL		6			Bit
衰减步进 Attenuation Step		1			dB
切换速度 Switch Speed			100		ns
输入驻波 Input VSWR			2.2	2.5	:1
输出驻波 Output VSWR			2.2	2.5	:1
最大输入功率 Input Max Power				25	dBm
直流供电 DC Supply		J30J-9ZKP			V DC
阻抗 Impedance		50			Ohms

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位Units
输入/输出接口 Input /Output Connector	2.4mm Female/2.4mm Female	
控制接口 Control Interface	J30J-9ZKP	
尺寸 Size	65*45*15	mm
重量 Weight	70	g

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
输入功率 RF Input Power	25 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形尺寸 Outline Drawing:

Unit: mm

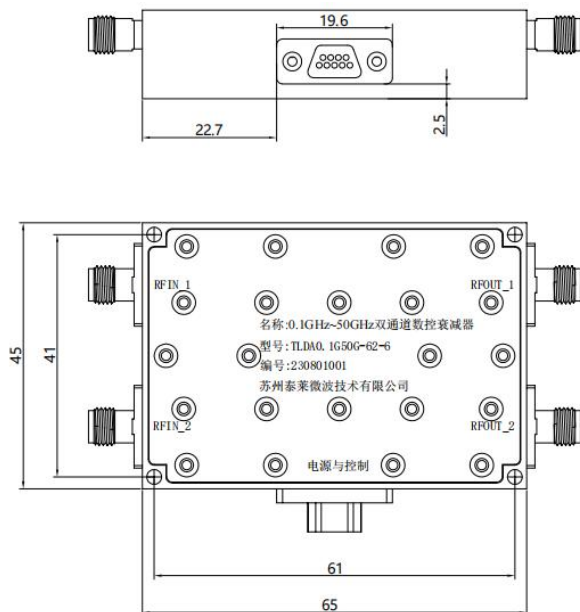

OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

上位机软件:



接口名称	接口型号	引脚号	接口定义
电源与控制	J30J-9ZKP	1、6	+12V
		2、5、7、9	GND
		3	TX
		4	RX
		8	NC

温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude		50,000		feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号 Revision
TLDA0.1G50G-62-6	6-Bit Digital Digital Attenuator,0.1-50GHz,2.4mm Female	Rev.1.1


典型曲线 Typical Performance Data:

VSWR&Insertion Loss vs Frequency

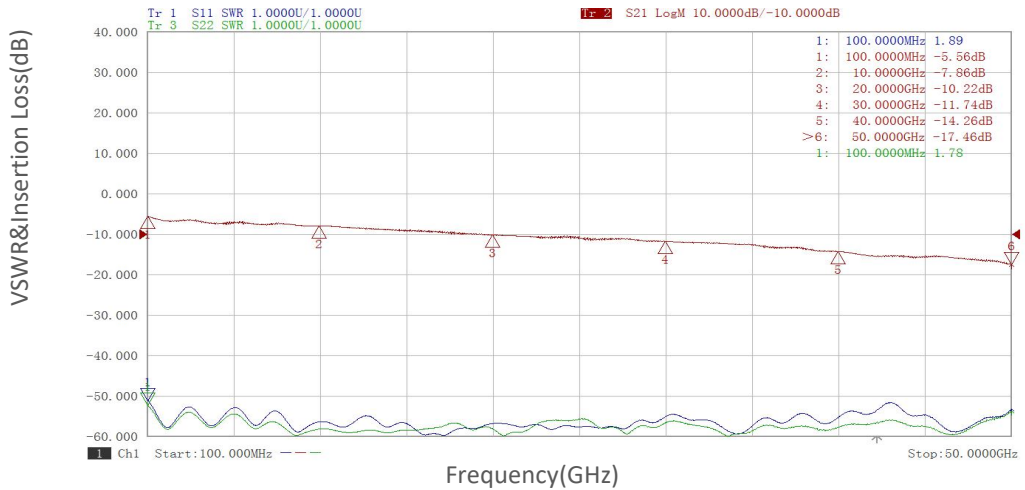


1dB:

VSWR&Attenuation vs Frequency

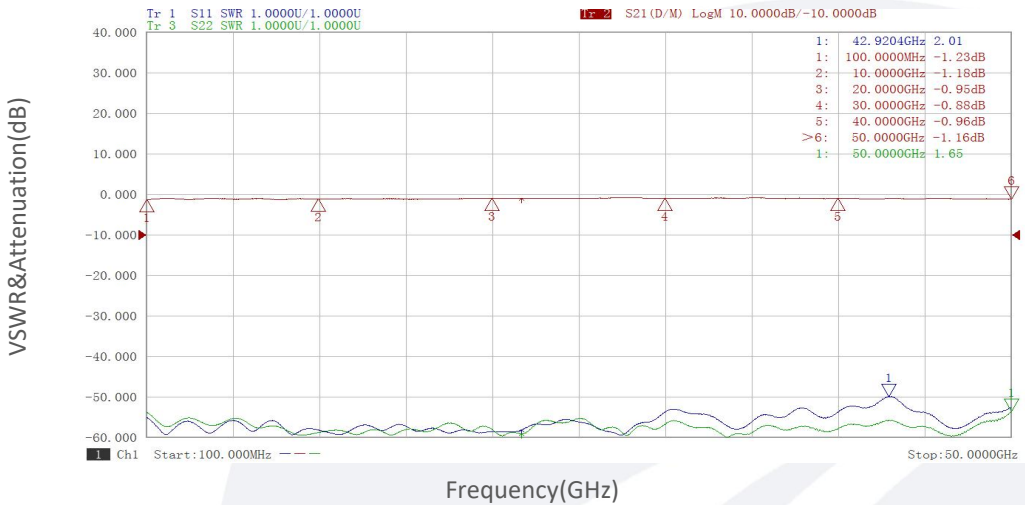

2dB:

VSWR&Attenuation vs Frequency

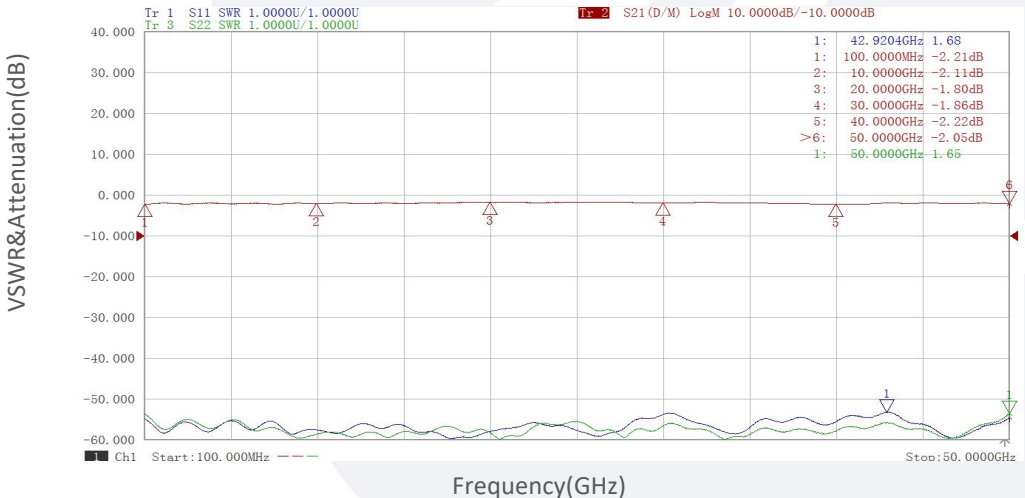


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:


4dB:

VSWR&Attenuation vs Frequency

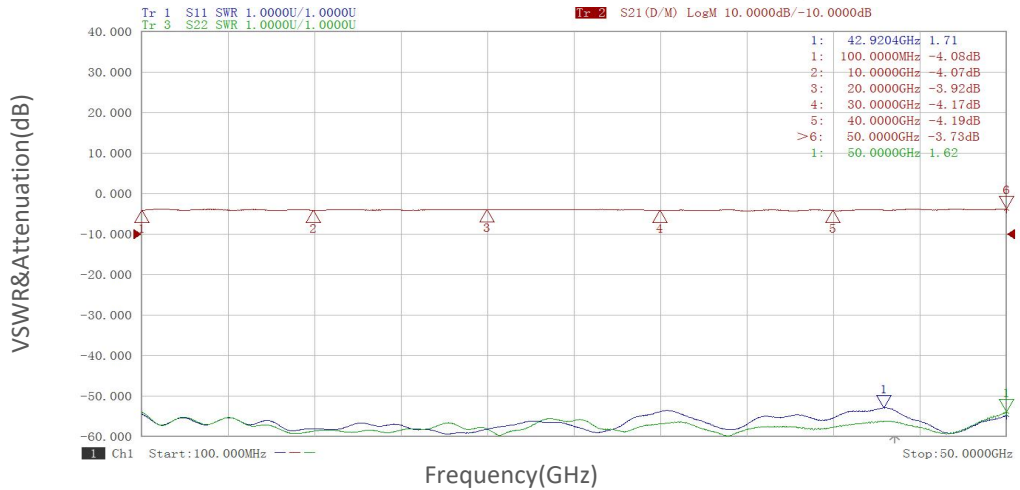


8dB:

VSWR&Attenuation vs Frequency

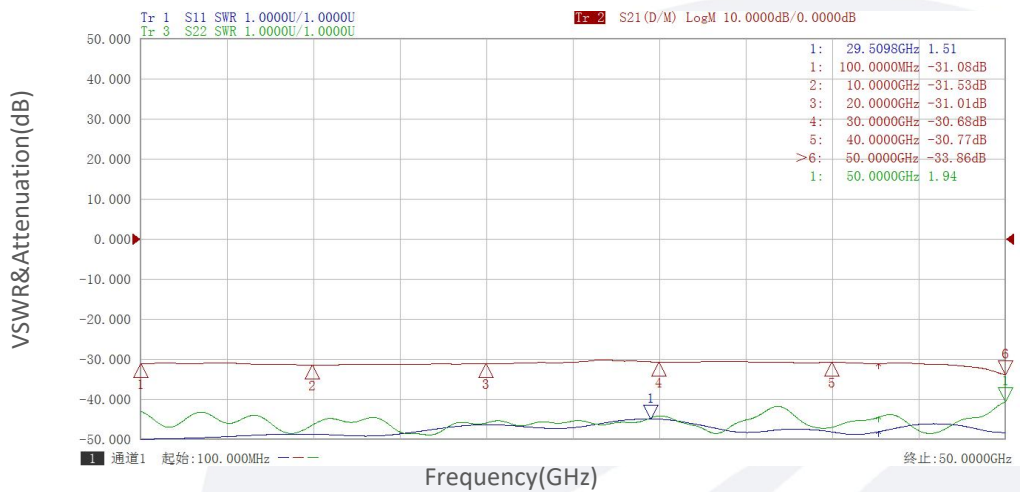

16dB:


VSWR&Attenuation vs Frequency

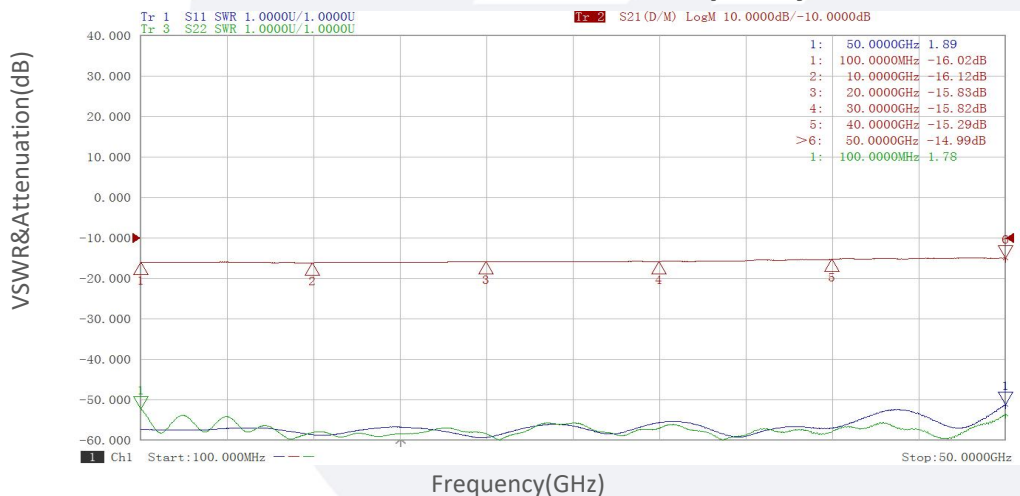


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

31dB:

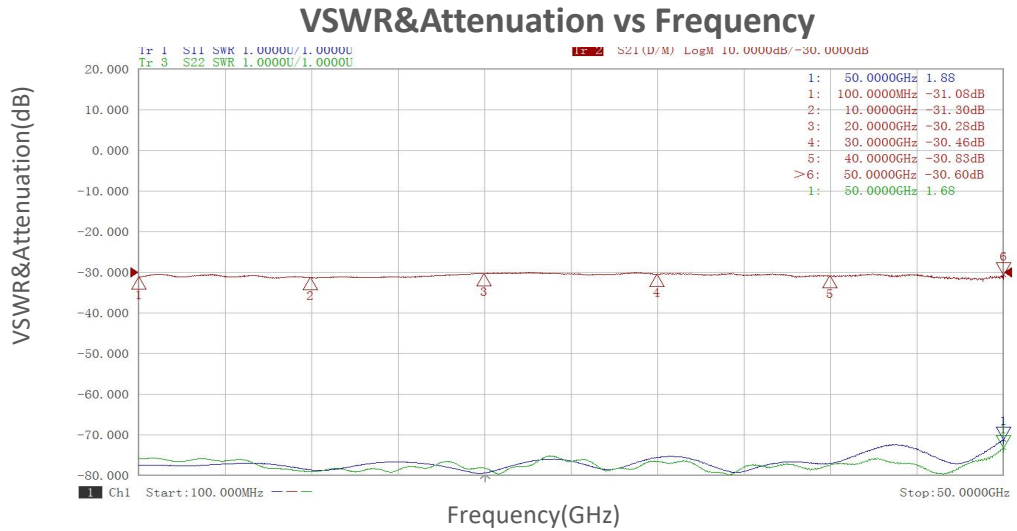

62dB:

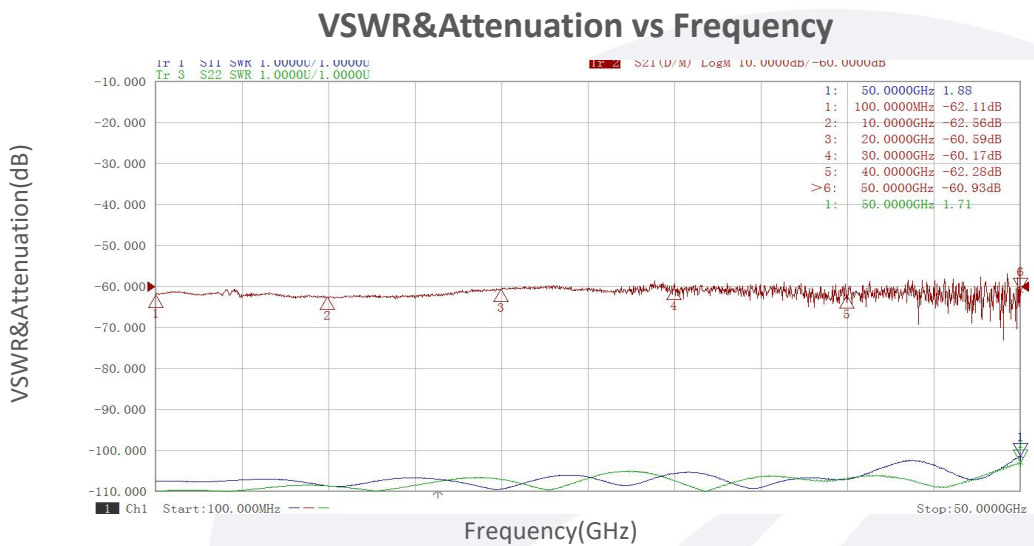

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.