

Model:TMAM-046075-0420-15**Active Multiplier****X4, 46-75 GHz, +20 dBm Output Power****Feature:**

- Output Frequency:46-75 GHz
- Output Power : 20dBm Typ
- Low power consumption

Electrical Specifications:

Parameter	Min	Typ	Max	Units
Output Frequency	46		75	GHz
Output Power		20		dBm
Input Frequency	11.5		18.75	GHz
Input Power	3	5	7	dBm
Multiply Factor		4		
Harmonic Suppression		-20		dBc
DC Voltage		12		V
DC Supply Current		200		mA

Mechanical Specifications:


Parameter	Value	Units
Output Connector	WR-15/UG-385/U	
Input Connector	SMA Female	
Bias	Solder Pin	
Size	50*28*23	mm

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	15 V
RF Input Power	+10 dbm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit: mm

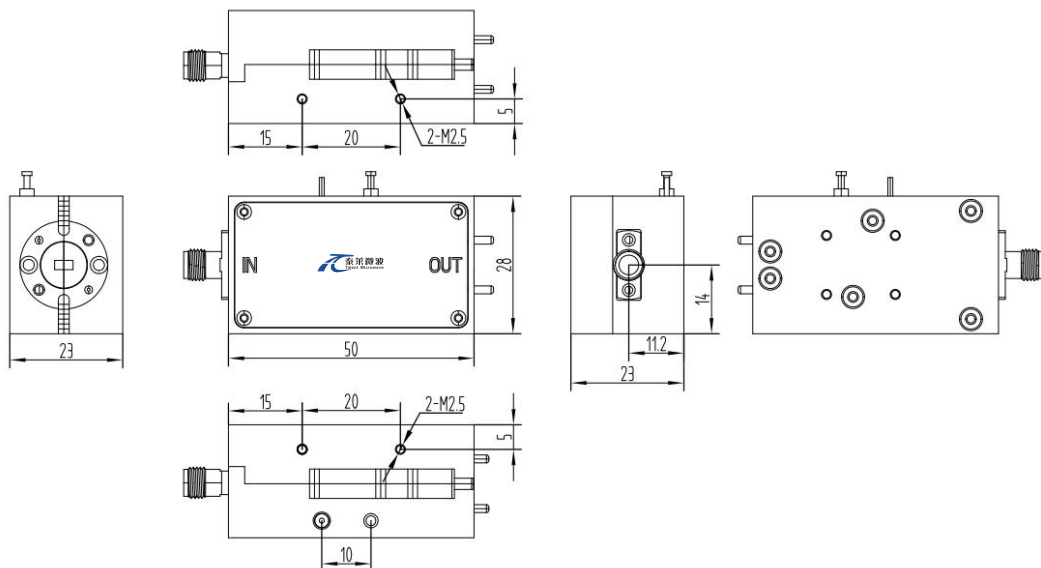

OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

Environmental Conditions:


Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+65	°C
Non-operating Temperature	-25		+75	°C
Relative humidity		95		%
Altitude		10,000		feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:


Part Number	Description	Revision
TMAM-046075-0420-15	Active Multiplier,X4,46-75GHz, Output Power: 20dBm Typ,WR-15/UG-385/U,SMA Female	Rev.1.1

Typical Performance Data:

Output Power vs Frequency

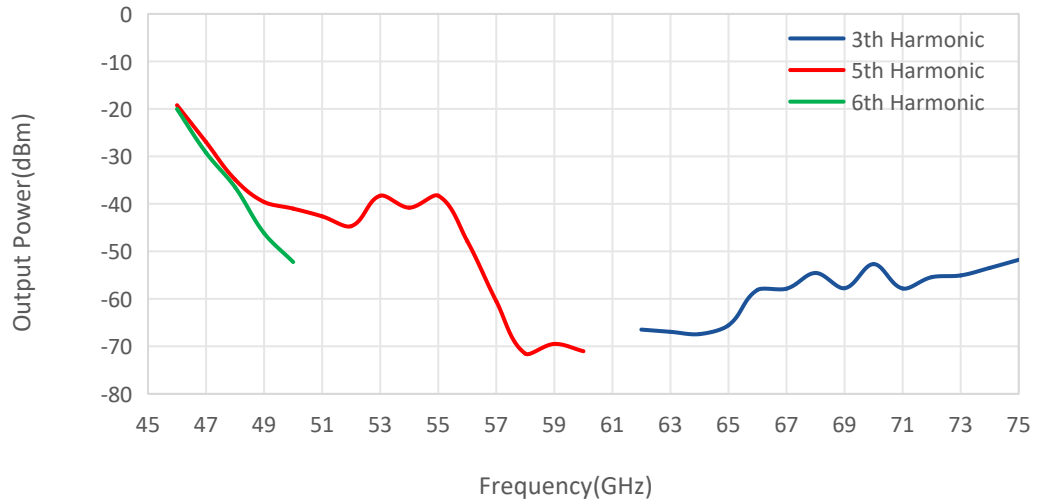

Harmonic Suppression vs Frequency

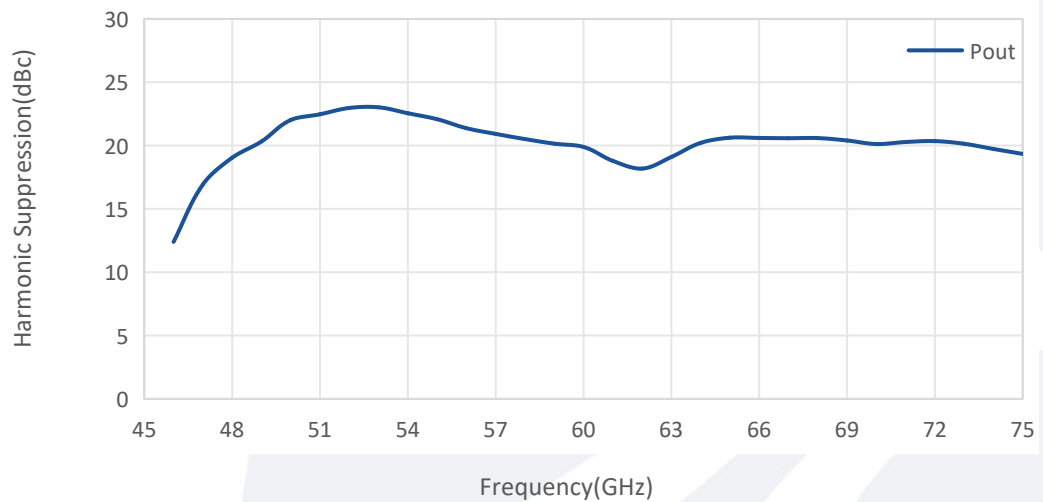

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.