

Coaxial Band-pass Filter

1850-2050 MHz/SMA Female

Model: TLBF-1G95-200M-E

TLBF-1G95-200M-E is a coaxial band-pass filter with a passband frequency from 1850 to 2050 MHz and a rejection frequencies from DC to 1300 MHz and point at 2550 MHz. The maximum insertion loss of the filter is 1.2 dB and the minimum rejection is 20 dB.

Features:

- Passband Frequency Range 1850 to 2050 MHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	1850		2050	MHz
Band Width			200	MHz
Passband Insertion Loss			1.2	dB
Pass Band Ripple			1.0	dB
VSWR			1.5	:1
Rejection@DC-1300MHz&2550MHz	20			dB
Power Handling			30	W
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Connectors	SMA Female	
Size	25*32*32	mm

Outline Drawing:

Unit:mm

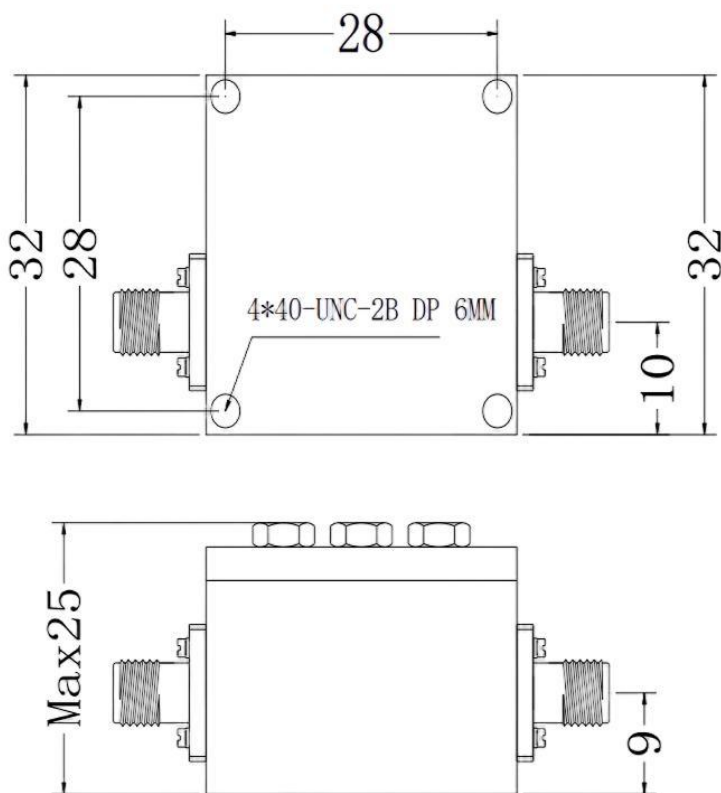


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-1G95-200M-E	Coaxial Band-pass Filter, Passband frequency range: 1850-2050MHz, Passband Insertion Loss: 1.2dB, SMA Female	Rev.1.0

Typical Performance Data:

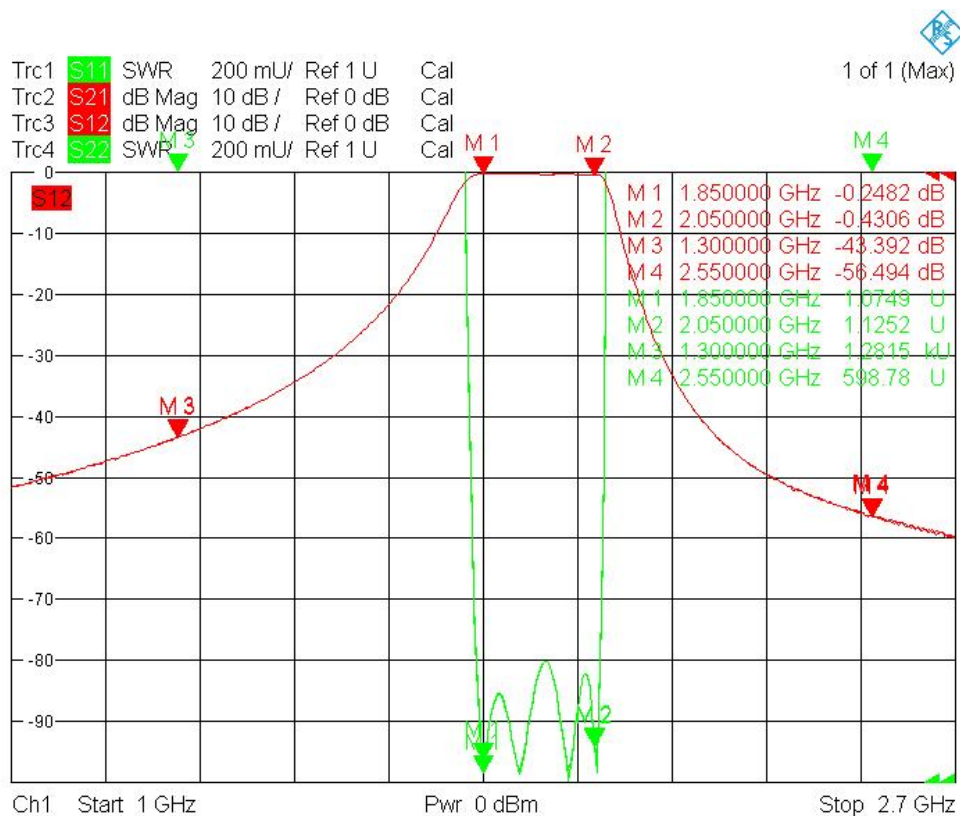

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.