

Coaxial Band-pass Filter

3.19-3.21 GHz/SMA Female

Model: TLBF-3G2-20M-E

TLBF-3G2-20M-E is a coaxial band-pass filter with a passband frequency from 3.19 to 3.21 GHz and a rejection frequencies from 3.14 GHz to 3.26 GHz. The maximum insertion loss of the filter is 2.0 dB and the typical rejection is 40 dB.

Features:

- Passband Frequency Range 3.19 to 3.21 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	3.19		3.21	GHz
Band Width			0.02	GHz
Passband Insertion Loss			2.0	dB
Pass Band Ripple			1.8	dB
Rejection	>40dB@fc±50MHz			
Power Handling			30	W
VSWR			1.5	:1
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Connectors	SMA Female	

Outline Drawing:

Unit:mm

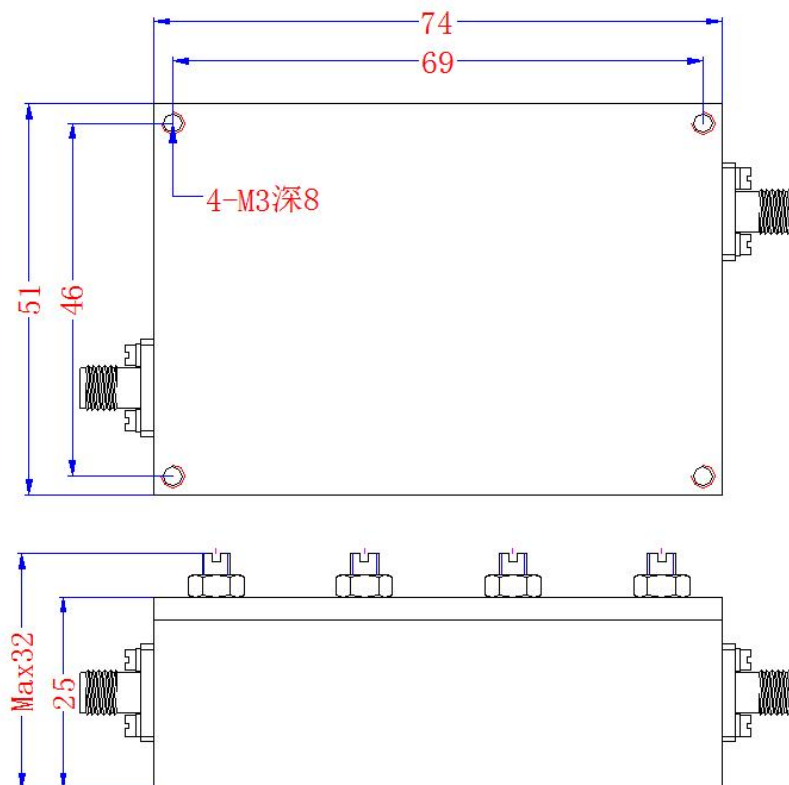


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-3G2-20M-E	Coaxial Band-pass Filter, Passband frequency range: 3.19-3.21GHz, Passband Insertion Loss: 2.0dB, SMA Female	Rev.1.0

Typical Performance Data:

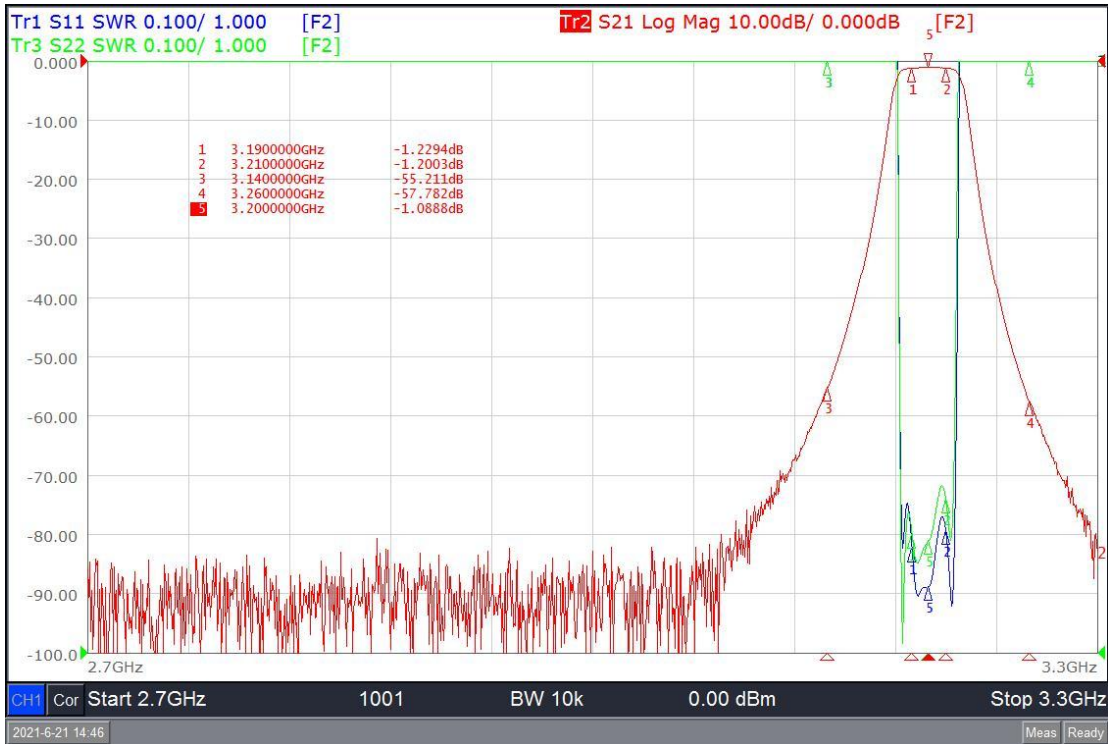

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.