

Coaxial Band-pass Filter

3.2-3.4 GHz/SMA Female

Model: TLBF-3G3-200M-E

TLBF-3G3-200M-E is a coaxial band-pass filter with a passband frequency from 3.2 to 3.4 GHz and a rejection frequencies from 2.75 GHz to 3.85 GHz. The maximum insertion loss of the filter is 1.8 dB and the typical rejection is 50 dB.

Features:

- Passband Frequency Range 3.2 to 3.4 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	3.2		3.4	GHz
Band Width			0.2	GHz
Passband Insertion Loss			1.8	dB
Pass Band Ripple			1.0	dB
Rejection	>50dB@fc+450MHz			
Power Handling			50	W
VSWR			1.6	:1
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Connectors	SMA Female	

Outline Drawing:

Unit:mm

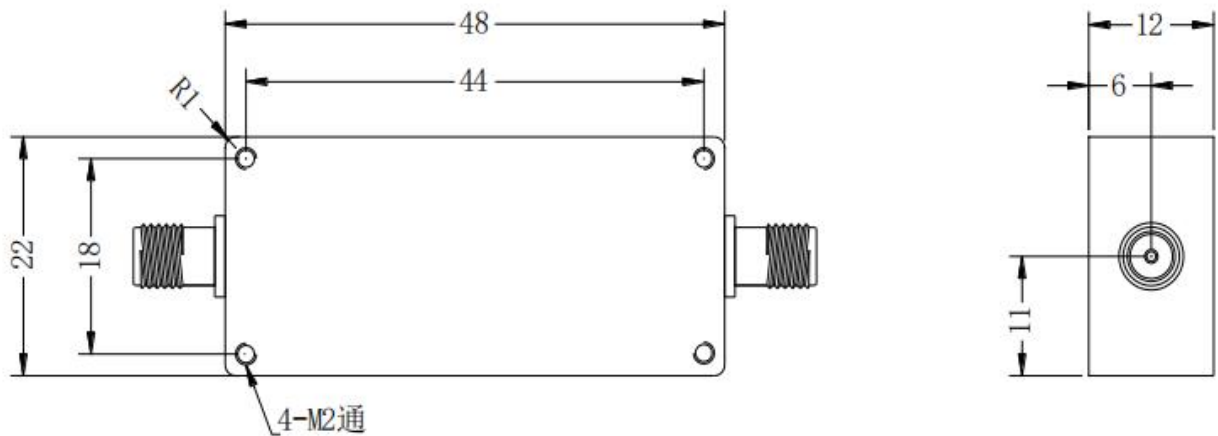

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.


Ordering Information:

Base Number	Description	Revision
TLBF-3G3-200M-E	Coaxial Band-pass Filter, Passband frequency range: 3.2-3.4GHz, Passband Insertion Loss: 1.0dB, SMA Female	Rev.1.0

Typical Performance Data:

Trc1 **S11** SWR 200 mU/ Ref 1 U Cal
Trc2 **S21** dB Mag 10 dB / Ref 0 dB Cal
Trc3 **S12** dB Mag 10 dB / Ref 0 dB Cal
Trc4 **S22** SWR 200 mU/ Ref 1 U Cal


1 of 1 (Max)

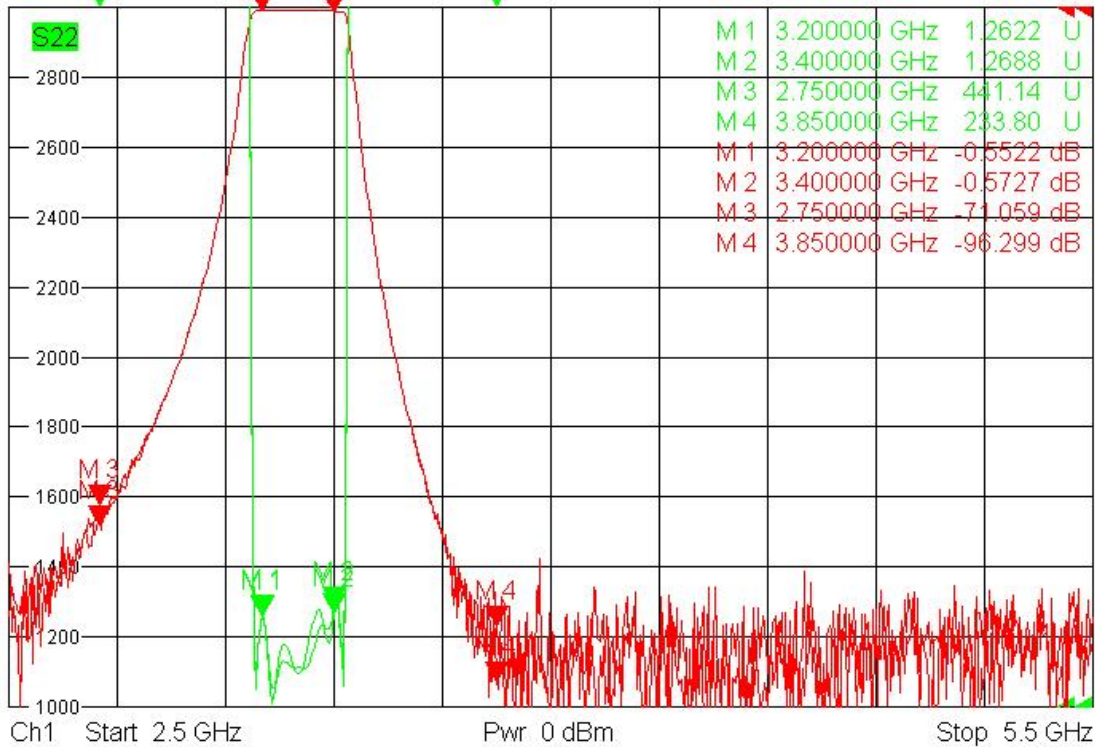

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.