

Coaxial Band-pass Filter

3.3-3.4 GHz/SMA Female

Model: TLBF-3G35-100M-E3

TLBF-3G35-100M-E3 is a coaxial band-pass filter with a passband frequency from 3.3 to 3.4 GHz and a rejection frequencies @3.1 and 3.6 GHz. The maximum insertion loss of the filter is 1.5 dB and the typical rejection is 50 dB.

Features:

- Passband Frequency Range 3.3 to 3.4 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	3.3		3.4	GHz
Band Width			0.1	GHz
Passband Insertion Loss			1.5	dB
Pass Band Ripple			1.3	dB
Rejection	>50dB@3100&3600Mhz			
Power Handling			15	W
VSWR			1.5	:1
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Connectors	SMA Female	

Outline Drawing:

Unit:mm

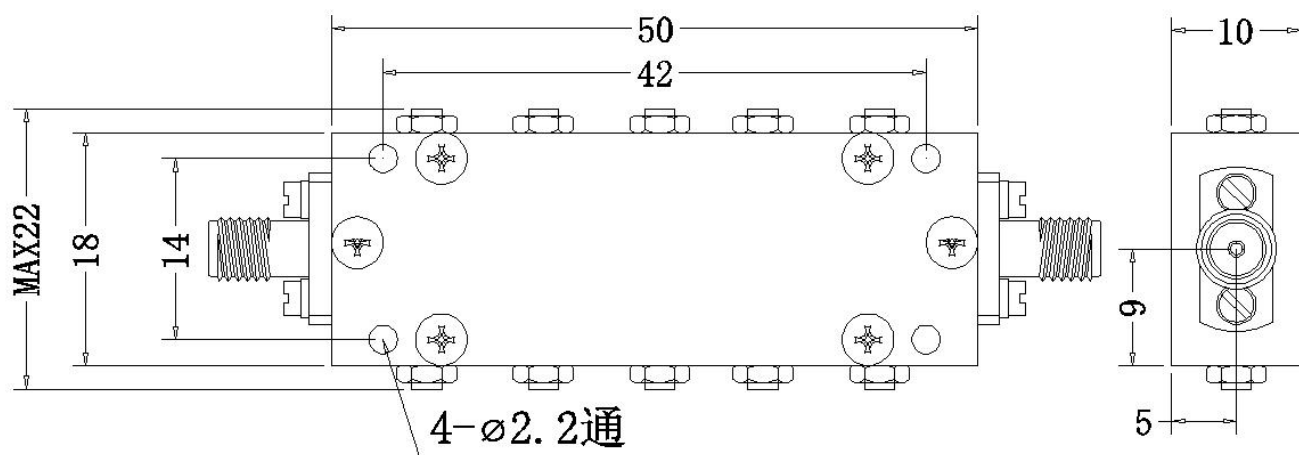

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-3G35-100M-E3	Coaxial Band-pass Filter, Passband frequency range: 3.3-3.4GHz, Passband Insertion Loss: 1.5dB, SMA Female	Rev.1.0