

Part No.: TBG-1530-3S-90-SMD

90 Degree 3dB Bridge

Electrical:




Frequency Range:	1500-3000MHz
Coupling :	3dB
Insertion Loss:	0.20dB Max
Isolation:	-22.0dB Min
VSWR:	1.20:1 Max
Amplitude Balance:	± 0.45 dB max
Phase Balance:	90 ± 1.5 degree
Power Handling:	500 Watt
Impedance:	50 OHMS

Mechanical:

Temperature Range:	-55° C - +105° C
Size:	25.4mm*12.7mm
Thickness:	4.5mm
Relative Humidity:	0 ~ 90%


Outline Drawing:

Unit: mm(Inches)

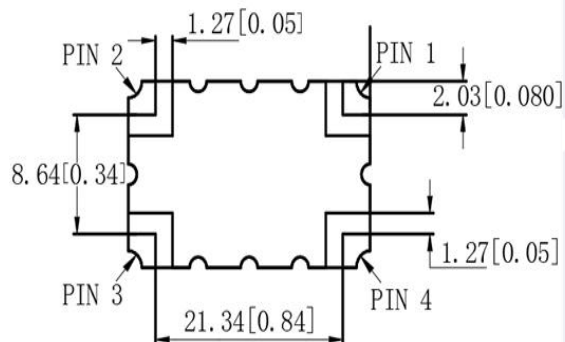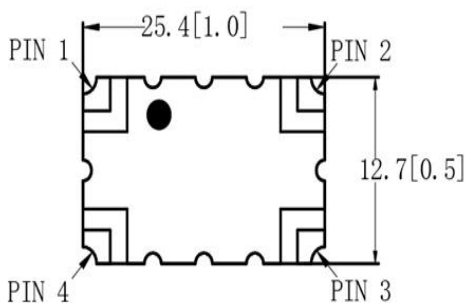

Port Configuration Table:

Hybrid Coupler Pin Configuration

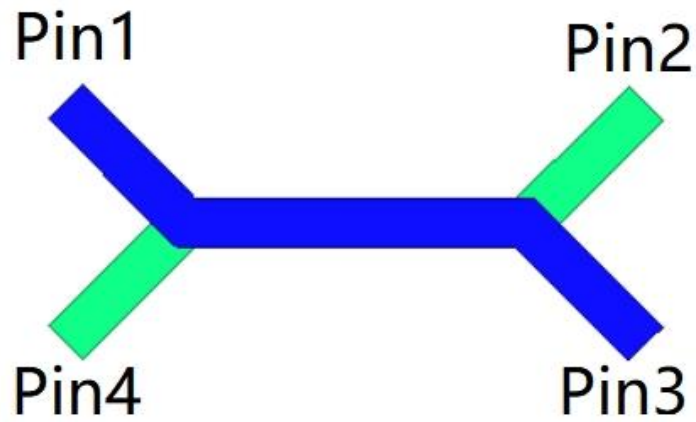


Configuration	Pin1	Pin2	Pin3	Pin4
Splitter	Input	Isolated	$-3\text{dB} < \theta < 90^\circ$	$-3\text{dB} < \theta$
Splitter	Isolated	Input	$-3\text{dB} < \theta$	$-3\text{dB} < \theta < 90^\circ$
Splitter	$-3\text{dB} < \theta < 90^\circ$	$-3\text{dB} < \theta$	Input	Isolated
Splitter	$-3\text{dB} < \theta$	$-3\text{dB} < \theta < 90^\circ$	Isolated	Input
Combiner	$A < \theta < 90^\circ$	$A < \theta$	Isolated	Output
Combiner	$A < \theta$	$A < \theta < 90^\circ$	Output	Isolated
Combiner	Isolated	Output	$A < \theta < 90^\circ$	$A < \theta$
Combiner	Output	Isolated	$A < \theta$	$A < \theta < 90^\circ$

Typical Performance Data

Frequency	MHz	1500	1700	1900	2100	2250	2400	2600	2800	3000
Coupling	dB	-3.46	-3.17	-2.97	-2.88	-2.85	-2.88	-2.97	-3.16	-3.47
Transmission	dB	-2.67	-2.98	-3.20	-3.34	-3.38	-3.39	-3.32	-3.15	-2.97
Insertion Loss	dB	-0.06	-0.07	-0.08	-0.10	-0.11	-0.13	-0.14	-0.15	-0.16
Isolation	dB	-24.39	-24.20	-24.18	-24.28	-24.42	-24.56	-24.66	-24.53	-24.10
Phase	degree	90.33	90.34	90.39	90.48	90.51	-90.50	90.48	90.61	90.92
Return Loss	Input	dB	1.12	1.12	1.12	1.11	1.10	1.09	1.09	1.09
	Coupler	dB	1.16	1.15	1.13	1.11	1.08	1.07	1.06	1.08
	Transmission	dB	1.11	1.12	1.12	1.12	1.12	1.12	1.13	1.14
	Isolated	dB	1.08	1.09	1.10	1.12	1.14	1.15	1.17	1.19


Typical Performance Data:

Coupling vs Frequency

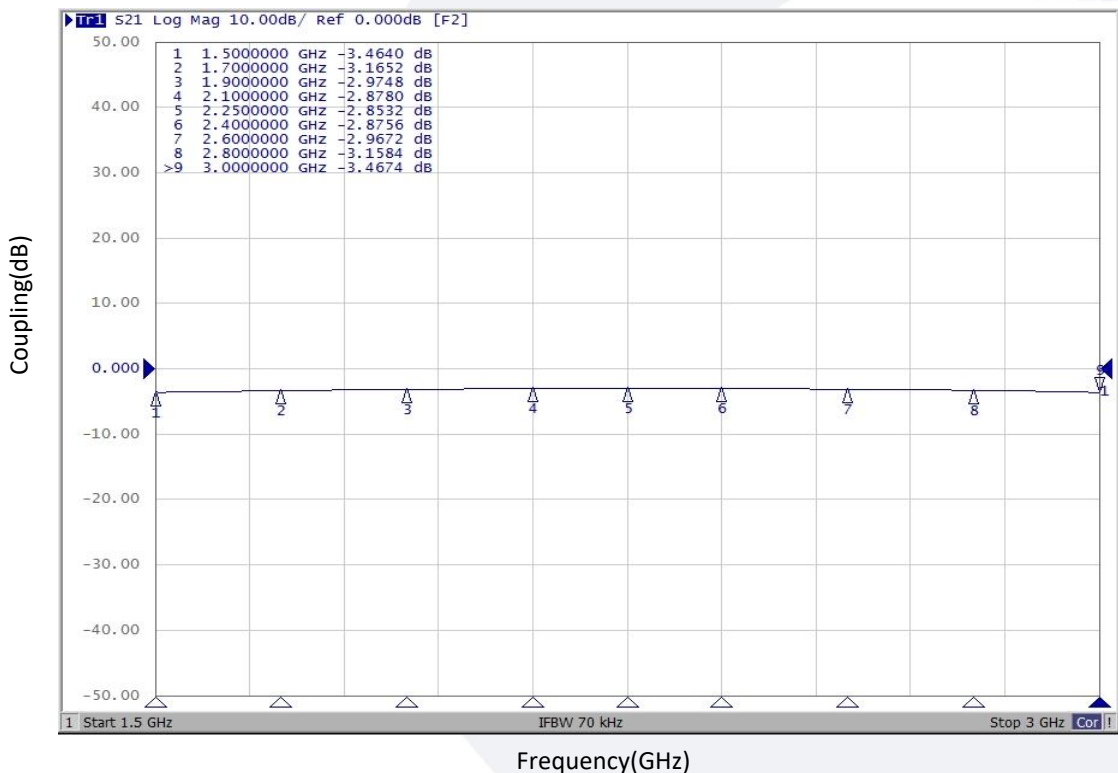


Typical Performance Data:


Transmission vs Frequency

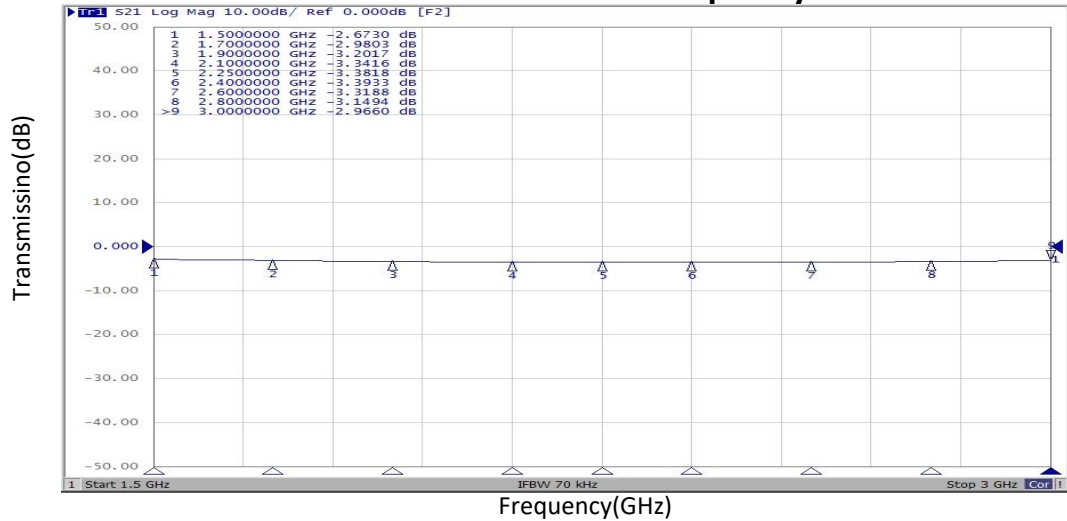

Isolation vs Frequency

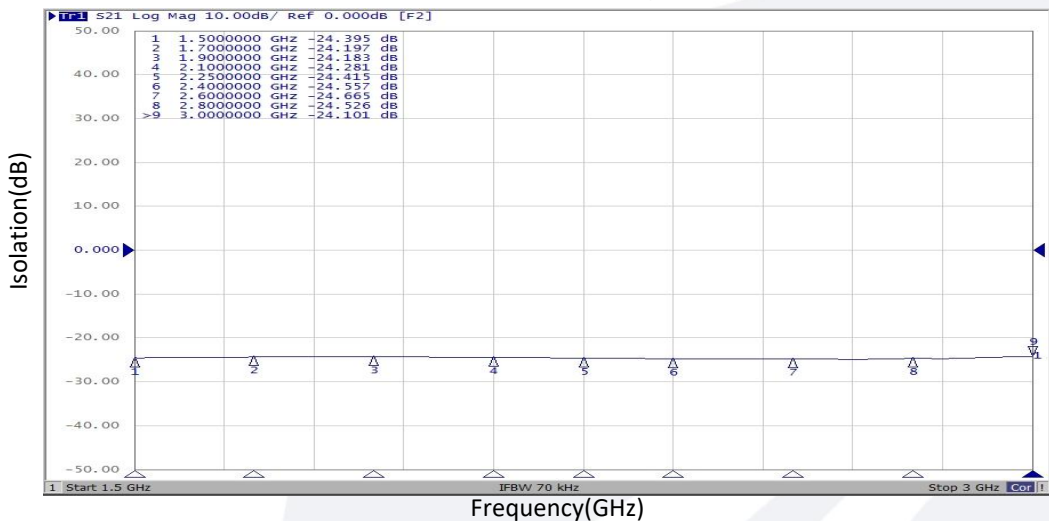


Coupling Phase vs Frequency

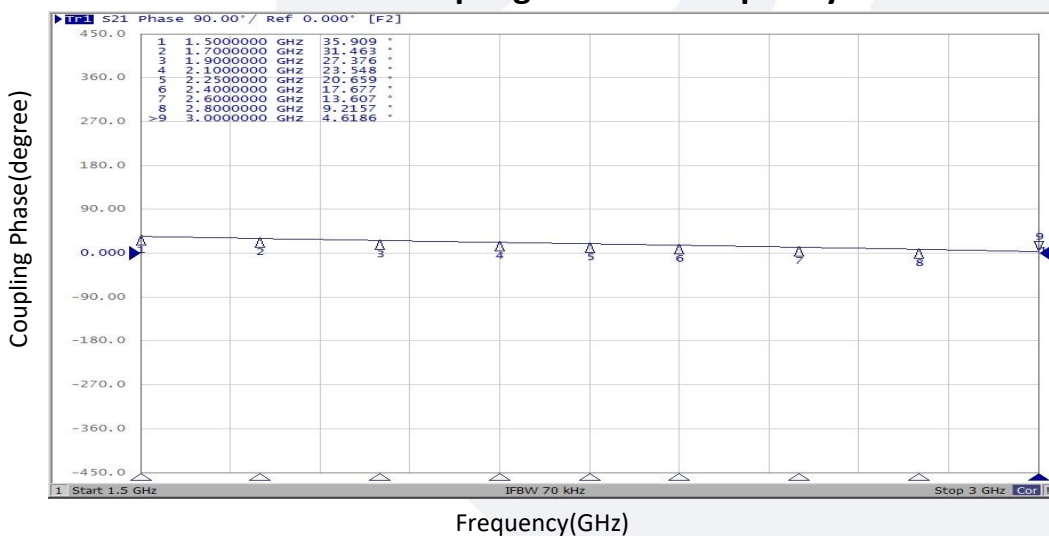


Typical Performance Data:


Transmission Phase vs Frequency

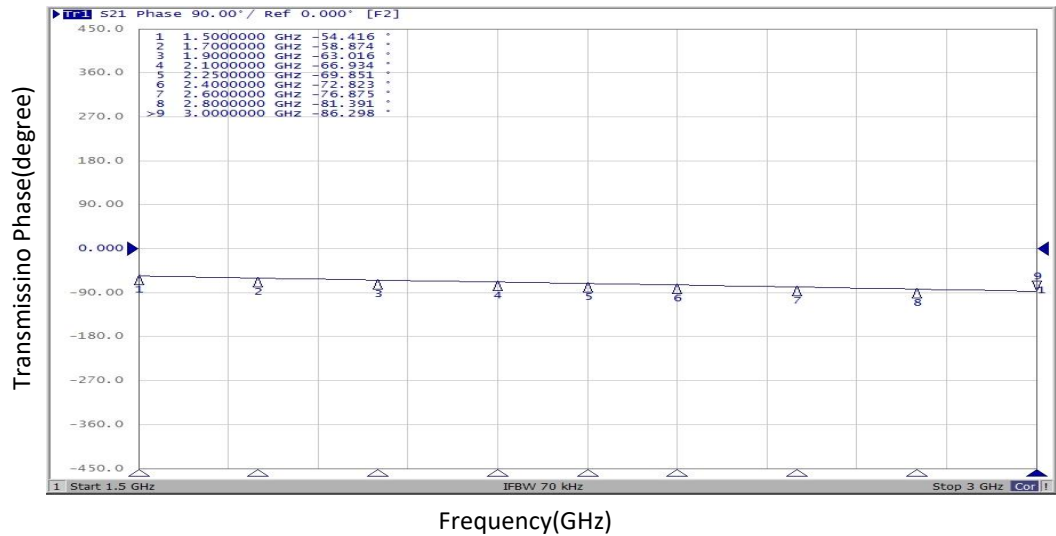

Input Port vs Frequency

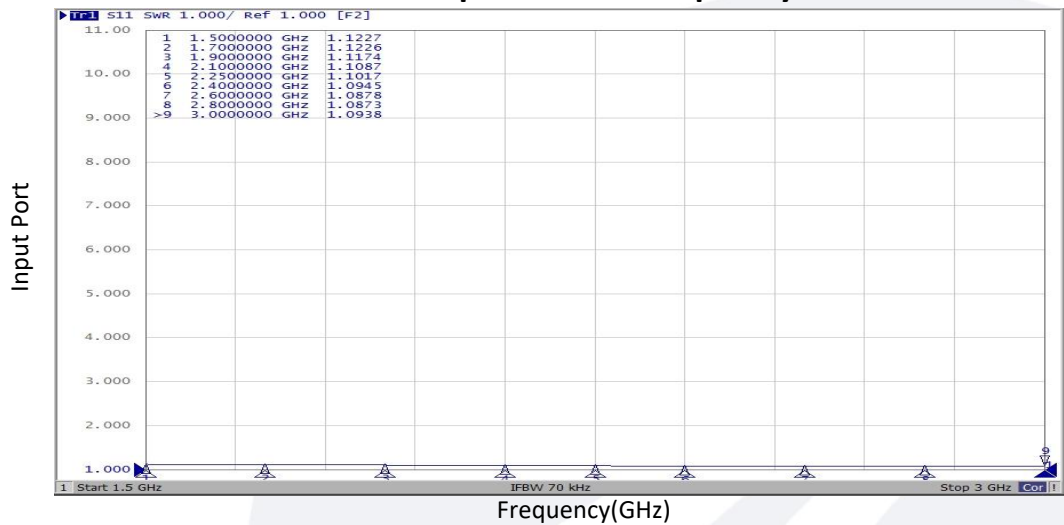


Coupling Port vs Frequency

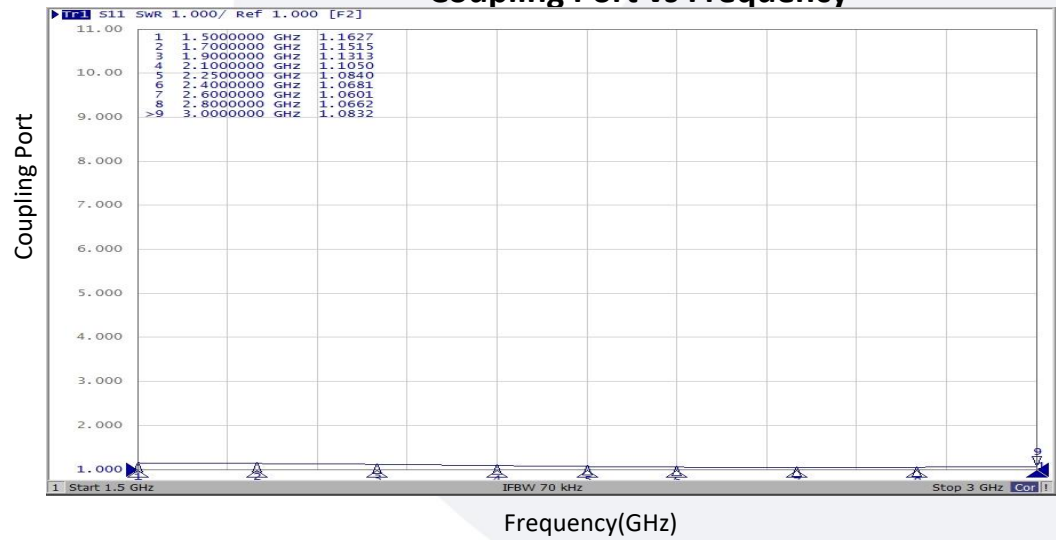

Typical Performance Data:

Transmission Port vs Frequency

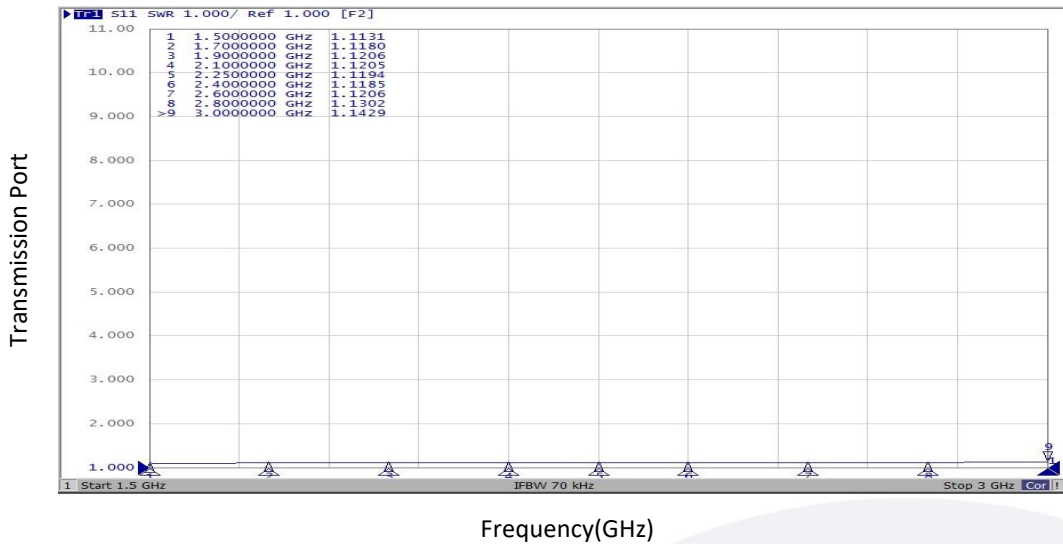

Isolation Port vs Frequency

