

Coaxial Band-pass Filter

8.9-12 GHz/SMA Female

Model: TLBF-8G9-12G-X

TLBF-8G9-12G-X is a coaxial band-pass filter with a passband frequency from 8.9 to 12 GHz and a rejection frequencies from DC-7.6GHz and 13.8-18 GHz. The maximum insertion loss of the filter is 1.5 dB and the typical rejection is 45 dB.

Features:

- Passband Frequency Range 8.9 to 12 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	8.9		12	GHz
Passband Insertion Loss			1.5	dB
Pass Band Ripple			1.2	dB
Rejection	>45dB@dc-7.6Ghz 13.8-18Ghz			dB
Power Handling			15	W
VSWR			1.8	:1
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Connectors	SMA Female	

Outline Drawing:

Unit:mm

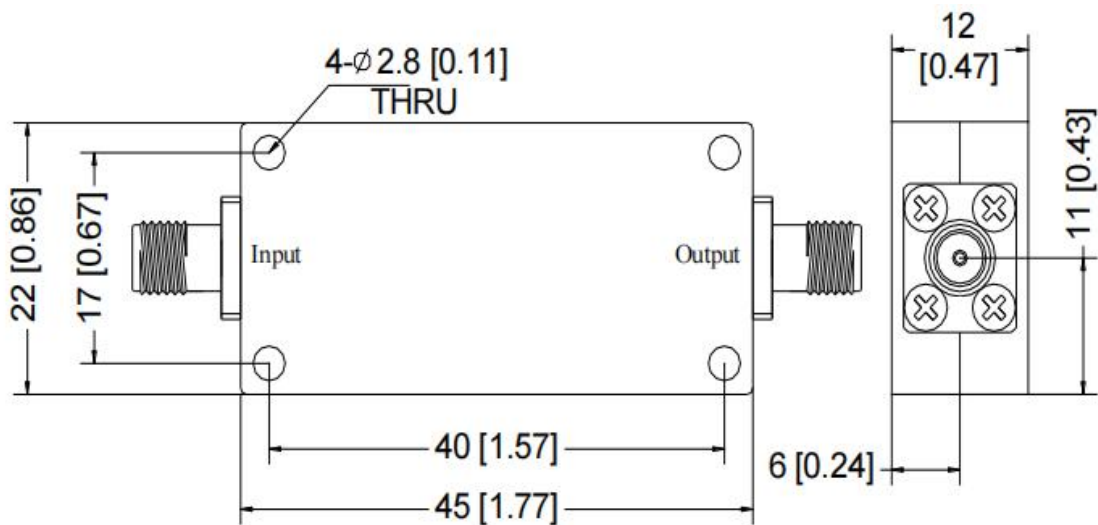

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-8G9-12G-X	Coaxial Band-pass Filter, Passband frequency range: 8.9-12GHz, Passband Insertion Loss: 1.5dB, SMA Female	Rev.1.0