

Coaxial Band-pass Filter

9.28-9.48 GHz/SMA Female

Model: TLBF-9G38-200M-E

TLBF-9G38-200M-E is a coaxial band-pass filter with a passband frequency from 9.28 to 9.48 GHz and a rejection frequencies from 8.88 GHz to 9.88 GHz. The maximum insertion loss of the filter is 2.8 dB and the typical rejection is 40 dB.

Features:

- Passband Frequency Range 9.28 to 9.48 GHz
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	9.28		9.48	GHz
Band Width			200	MHz
Insertion Loss			2.8	dB
Pass Band Ripple			1.8	dB
Rejection	>40dB@fc±400MHz			
Power Handling			50	W
VSWR			1.5	:1
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Connectors	SMA Female	

Outline Drawing:

Unit:mm

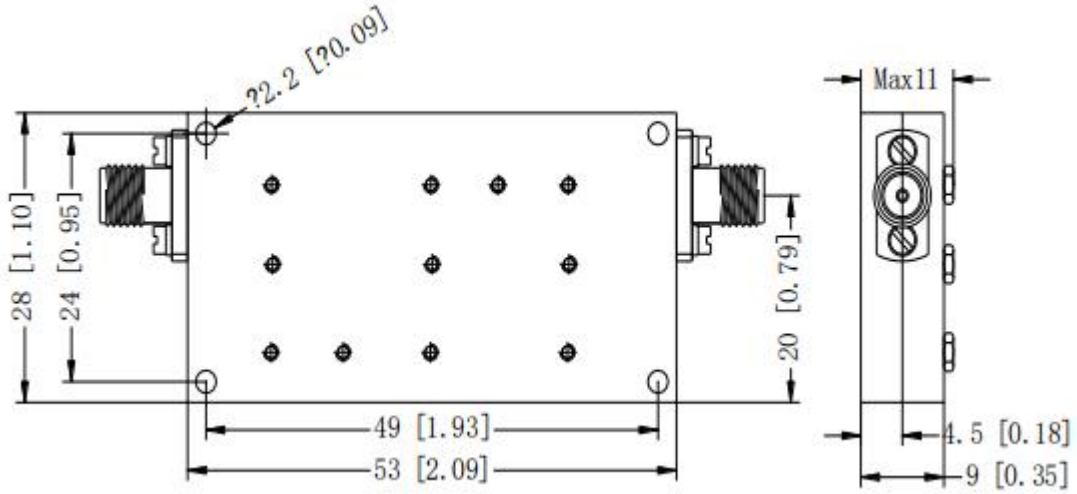

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-9G38-200M-E	Coaxial Band-pass Filter, Passband frequency range: 9.28-9.48GHz, Passband Insertion Loss: 2.8dB, SMA Female	Rev.1.0