

Coaxial Band-pass Filter

13.42-13.51 GHz/SMA Female

Model: TLBF-13G435-30M-E2

TLBF-13G435-30M-E2 is a coaxial band-pass filter with a passband frequency from 13.42 to 13.51 GHz and a rejection frequency @13.25 GHz. The maximum insertion loss of the filter is 2.0 dB and the typical rejection is 50 dB.

Features:

- Passband Frequency Range 13.42 to 13.51 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	13.42		13.51	GHz
Band Width		(0.9)	0.3	GHz
Passband Insertion Loss			2.0	dB
Pass Band Ripple			1.8	dB
Rejection	>50dBc@12.35GHz			dB
Power Handling			30	W
VSWR			1.5	:1
Impedance	50			Ohms

Environmental And Physical Characteristics:

Description	Parameter	Units
Operating Temperature	-40 To +70	°C
Connectors	SMA Female	
Weight	/	g

Outline Drawing:

Unit:mm

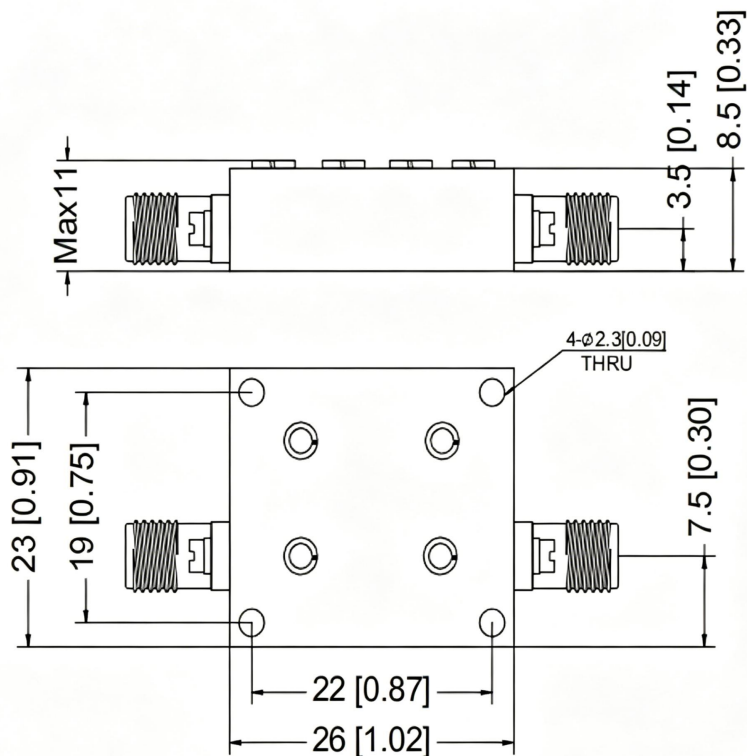


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-13G435-30M-E2	Coaxial Band-pass Filter, Passband frequency range: 13.42-13.51GHz, Passband Insertion Loss: 2.0dB, SMA Female	Rev.1.0

Typical Performance Data:

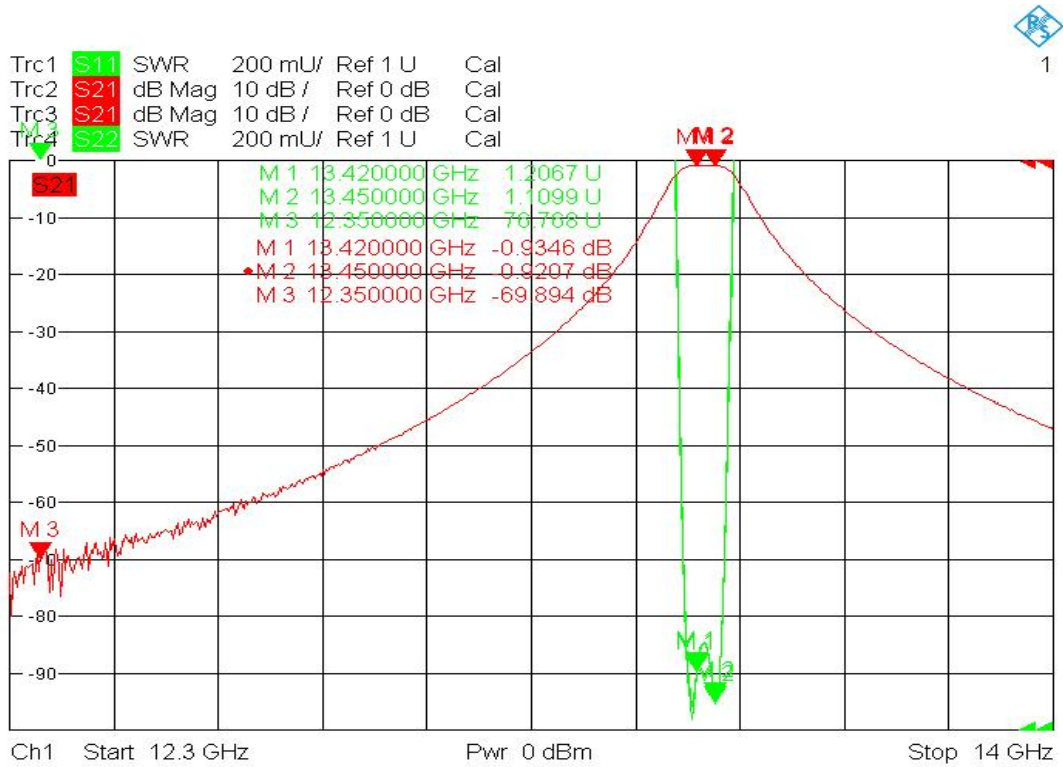

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.