

U-Band VNA Frequency Transmit Extender

40-60GHz /WR-19/

Model: TLTE-4060-13

TLTE-4060-13 frequency extenders are a dedicated Test & Measurement solution for extending the range of your Vector Network Analyzer (VNA) to 40-60 GHz.

Features:

- Ultra Wide Band: 40-60 GHz
- Port Output Power (No Attenuation): 13 dBm Typ
- Dynamic Range @ 10 Hz BW: 120dB Typ
- Unconditional stability

Applications:

- VNA Frequency Extension
- Antenna measurements
- Material characterisation

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Frequency range	40		60	GHz
Test Port Output Power		13		dBm
Test Port Input Power (Damage)			20	dBm
Dynamic Range @ 10Hz BW		120		dB
RF Input Frequency	10		15	GHz
RF Input Power	+3	+5	+7	dBm
RF Multiplication Factor		4		
LO Input Frequency	10		15	GHz
LO Input Power	+3	+5	+7	dBm
LO Multiplication Factor		4		
IF Frequency Range	1		1000	MHz

Absolute Maximum Ratings :


Description	Parameter	Units
Test Port Input Power	+20	dBm
RF/LO Port Damage Level	+10	dBm
ESD sensitivity (HBm)	Class 0, passed 150V	
Supply Bias AC Voltage	240	V

Outline Drawing:

Unit:mm

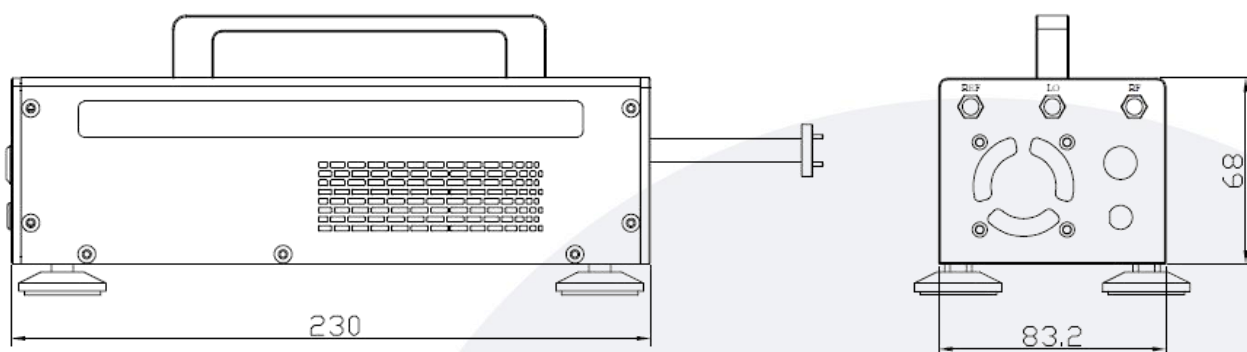

Block Diagrams:

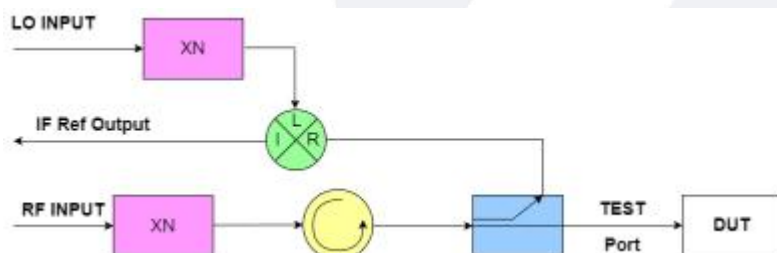

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	0 To +45	°C
Storage Temerature	-55 to +125	°C
Material	Al	
Finish	Gray spray paint	
Size	230*68*83.2	mm

Connector Information:

Parameter	Value
RF Input Connector	SMA Female
LO Input Connector	SMA Female
IF Output Connector	SMA Female
Test Port Connector	WR-19/UG-383
Power Supply Pin	FGG 0B 4 Core

Ordering Information:

Part Number	Description	Revision
TLTE-4060-13	Transmit Extender, 40-60 GHz, Output Power:13dBm typ, Dynamic Range:120 dB typ.	Rev.1.1

Components Included:

Part Number	Description	Quantity
TLACTDC-22012	AC-to-DC Power Adapter	1 PCS

Notes:

1. Dimensions and specifications may be changed without prior notice.
2. Standard Warranty:three years.