

Coaxial Band-pass Filter

Center Frequency 960 MHz/SMA Female

Model: TLBF-960M-500M-L

TLBF-960M-500M-L is a coaxial band-pass filter with a passband center frequency at 960 MHz and a rejection frequencies point at 500 MHz and 1500 MHz. The maximum insertion loss of the filter is 1.0 dB and the minimum rejection is 50 dB.

Features:

- Passband Center Frequency 960 MHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	710		1210	MHz
Band Width			500	MHz
Passband Insertion Loss			1.0	dB
Pass Band Ripple			1.0	dB
VSWR			1.6	:1
Rejection@500MHz&1500MHz	50			dB
Power Handling			2	W
Impedance	50			Ohms

Environmental And Physical Characteristics:

Description	Parameter	Units
Operating Temperature	-40 To +70	°C
Connectors	SMA Female	
Size	10*12*40.4	mm

Outline Drawing:

Unit:mm

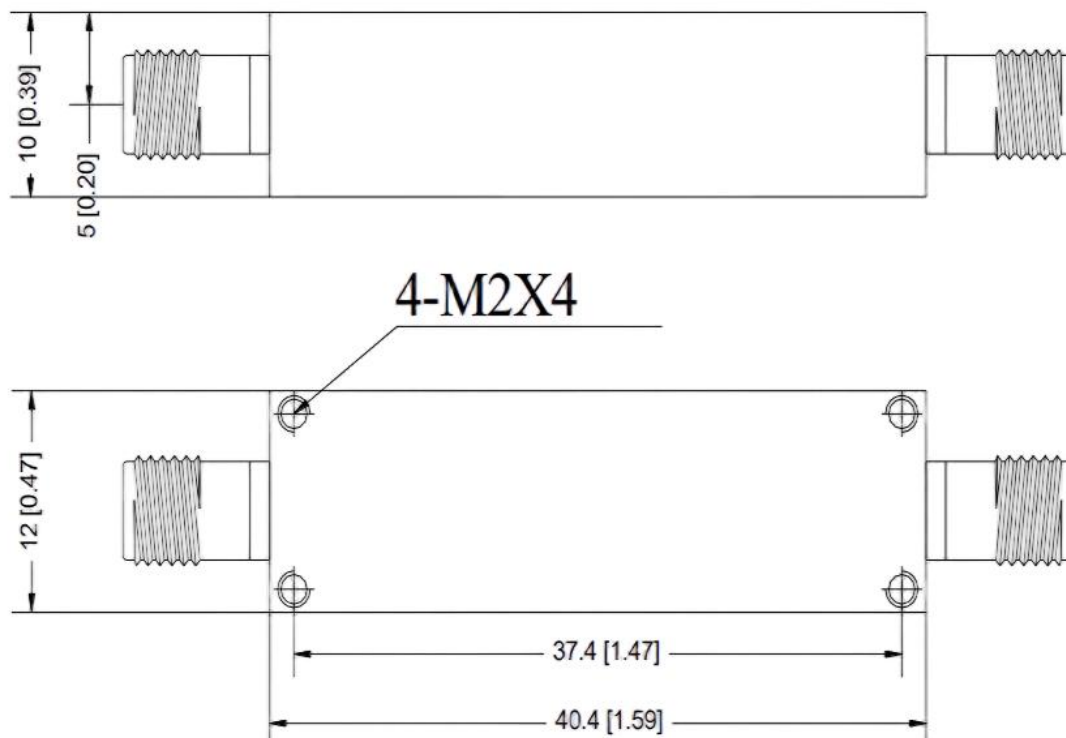


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-960M-500M-L	Coaxial Band-pass Filter, Passband center frequency: 960MHz, Passband Insertion Loss: 1.0dB, SMA Female	Rev.1.0

Typical Performance Data:

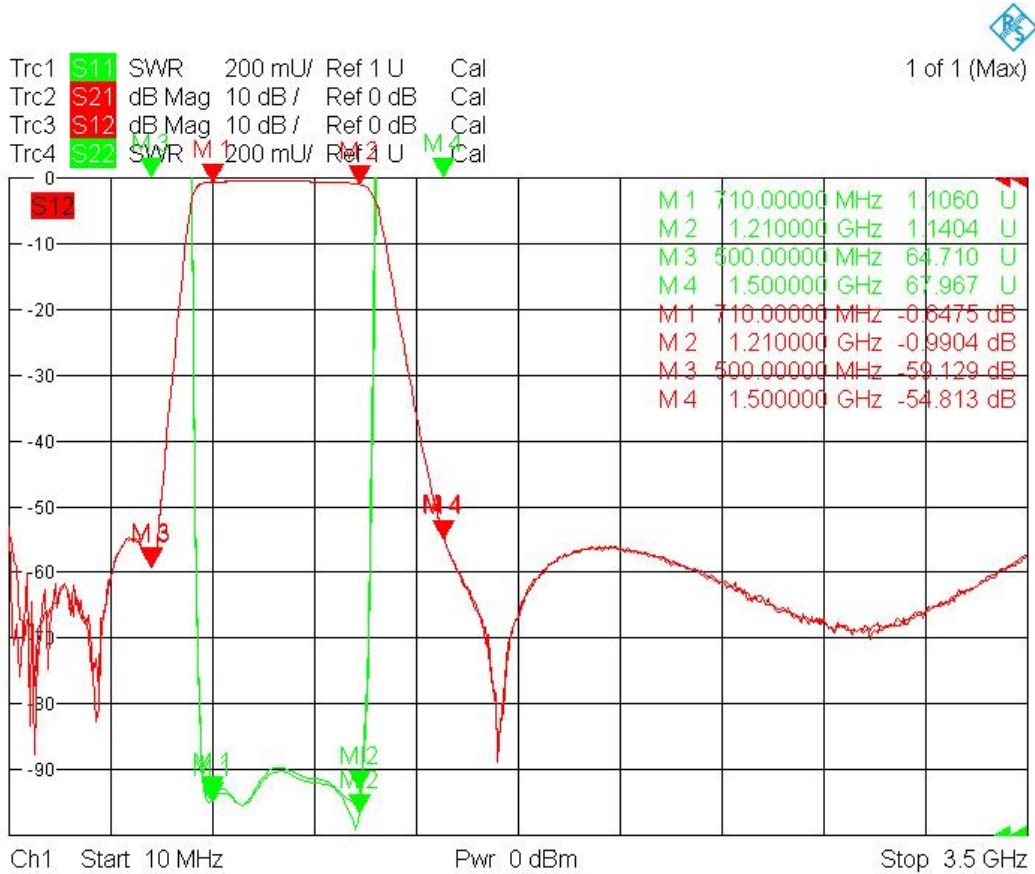

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.