

Part No.: TC-0460-10S

10dB Directional Coupler SMA- Female 50Ω 400-6000MHz

Electrical:

Frequency Range: 400-6000MHz

Coupling: $10 \pm 1.2\text{dB}$

Insertion Loss: $\leq 1.0\text{dB}$

VSWR: $\leq 1.5:1$

Directivity: $\geq 12\text{dB}$

Power Handling: 30Watt

Impedance: 50Ω



Mechanical:


Temperature Range: $-40^{\circ}\text{C} - +80^{\circ}\text{C}$





Connectors: SMA-Female

Relative Humidity: 0 ~ 90%

Outline Drawing:

Unit: mm

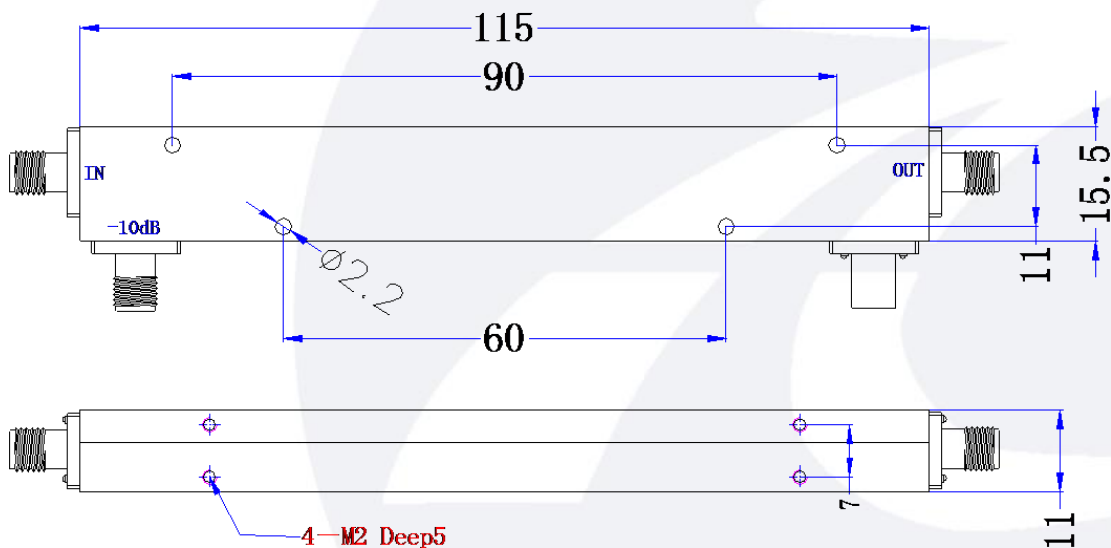


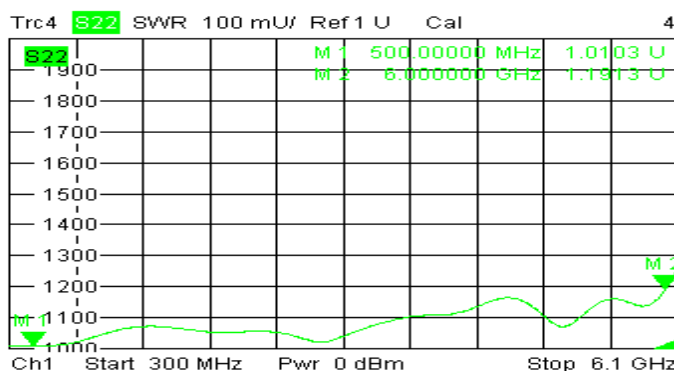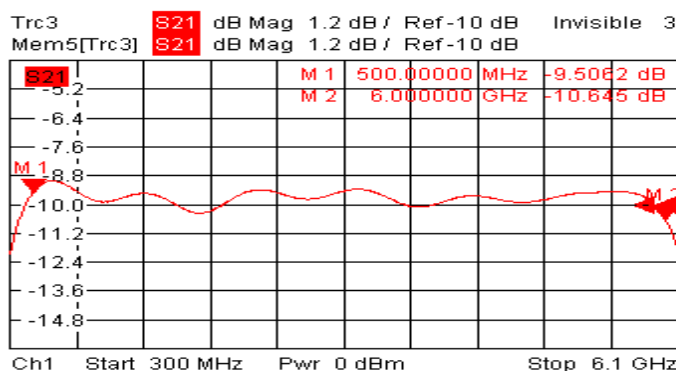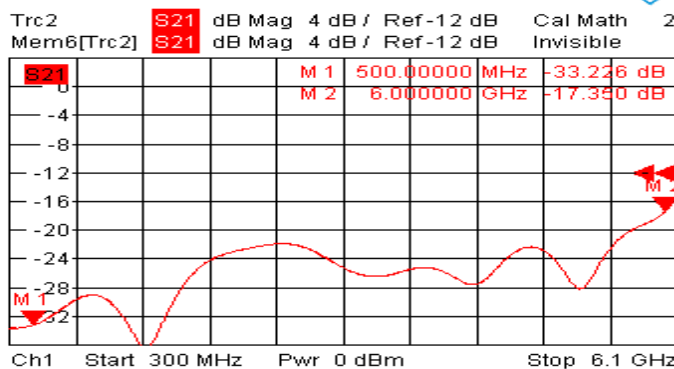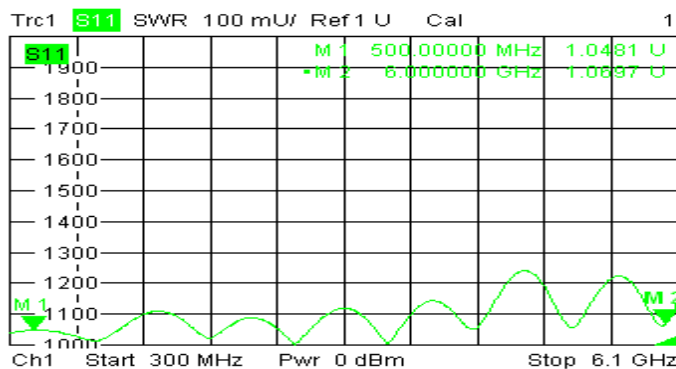

11/7/2019, 11:53 AM

Trc3 **S21** dB Mag 1.2 dB / Ref 0 dB Cal
Mem5[Trc3] **S21** dB Mag 1.2 dB / Ref 0 dB Invisible

3 of 4 (Max)

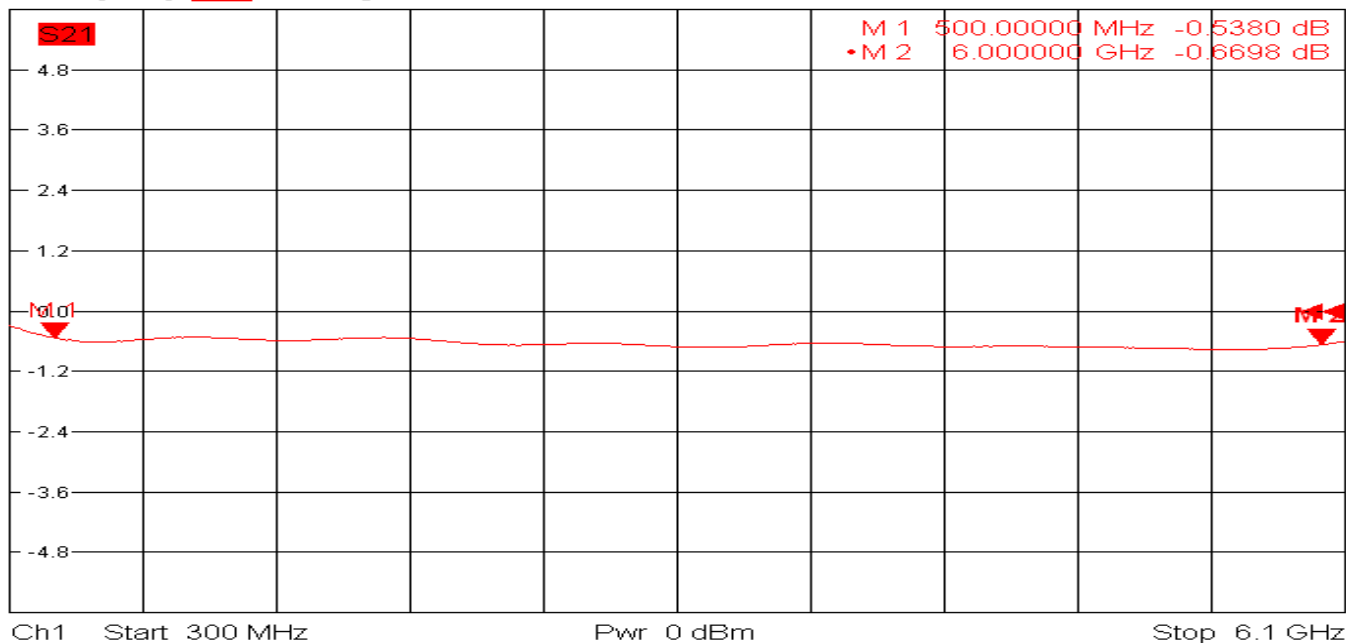

11/7/2019, 11:58 AM