

Part No.: TC-0460-20S

20dB Directional Coupler SMA-Female 50Ω 0.4-6 GHz

Electrical:


Frequency Range:	0.4-6GHz
Coupling::	20 ± 1.5db
Insertion Loss:	0.8db typ, 1.0db max
Directivity:	≥ 12db
VSWR:	1.5 max
Power Handling:	50 Watt
Impedance:	50 OHMS

Mechanical:

Temperature Range:	-45° C - +85° C
Connectors:	SMA-Female
Relative Humidity:	0 ~ 90%

Outline Drawing:


Unit: mm

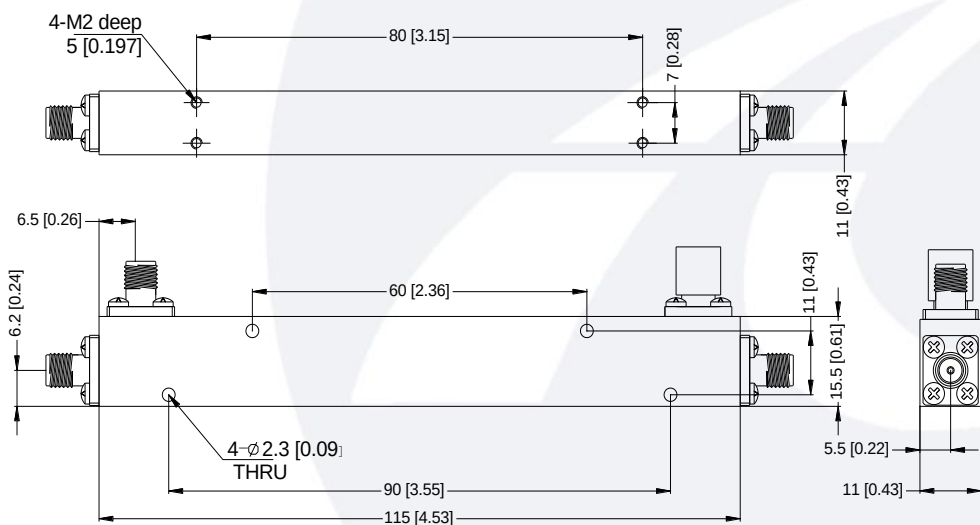

E5063A Network Analyzer

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Resize

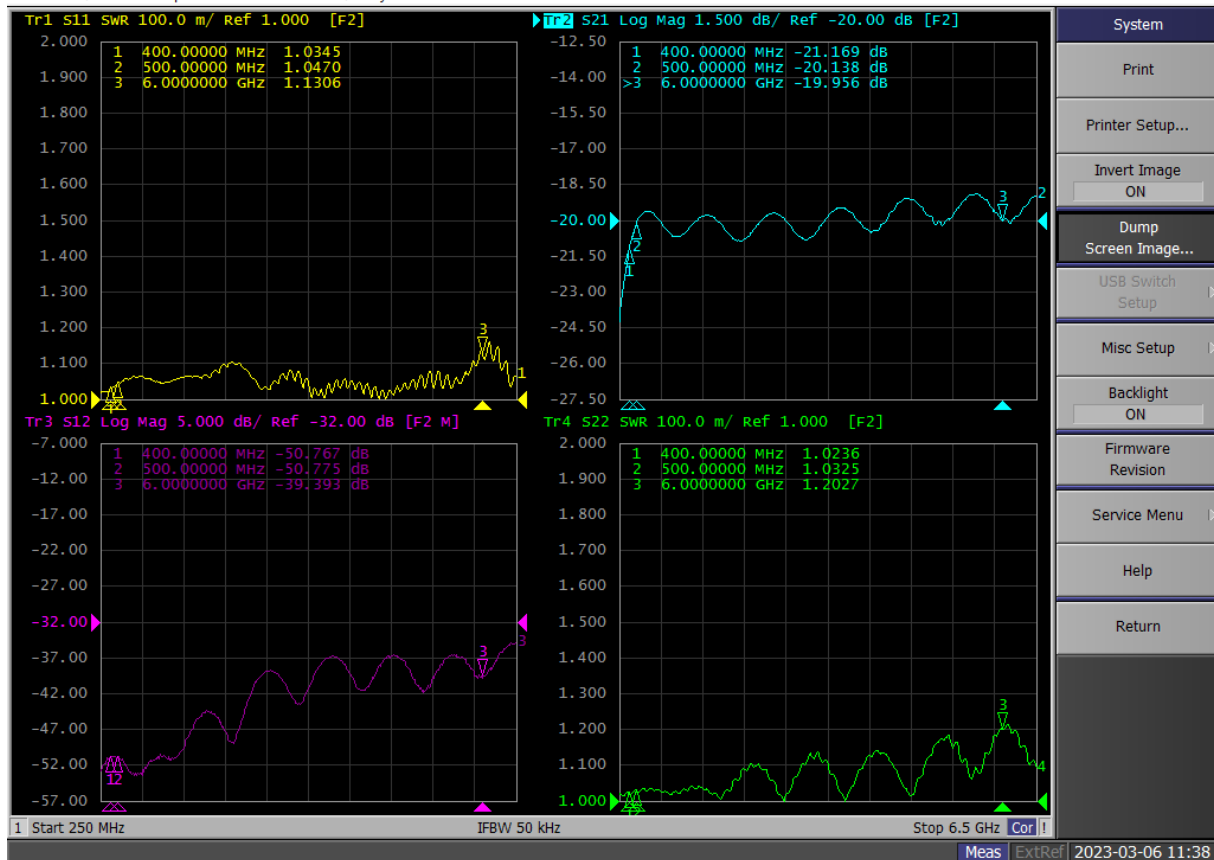

E5063A Network Analyzer

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Resize

