

Part No.: TC-0460-30S

30dB Directional Coupler SMA- Female 50Ω 400-6000MHz

Electrical:

Frequency Range: 400-6000MHz

Coupling: $30 \pm 1.5\text{dB}$

Insertion Loss: $\leq 1.0\text{dB}$

VSWR: $\leq 1.5:1$

Directivity: $\geq 10\text{dB}$

Power Handling: 30Watt

Impedance: 50Ω



Mechanical:


Temperature Range: $-40^{\circ}\text{C} - +80^{\circ}\text{C}$

Connectors: SMA-Female

Relative Humidity: 0 ~ 90%


Outline Drawing:

Unit: mm

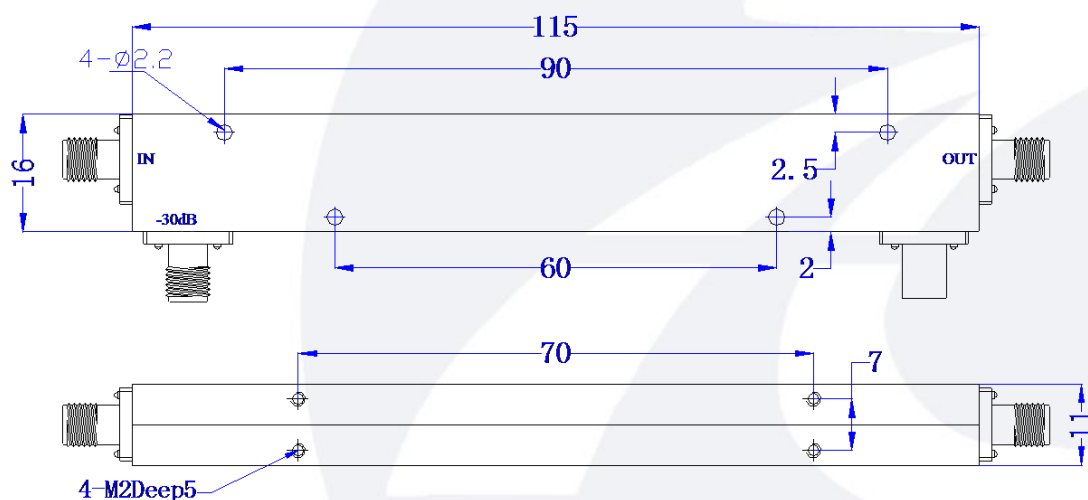


21 Apr 2017 12:28:34


CH1 SWR 100 m / REF 1
S11 1 : 1.0167 .400 000 000 GHz

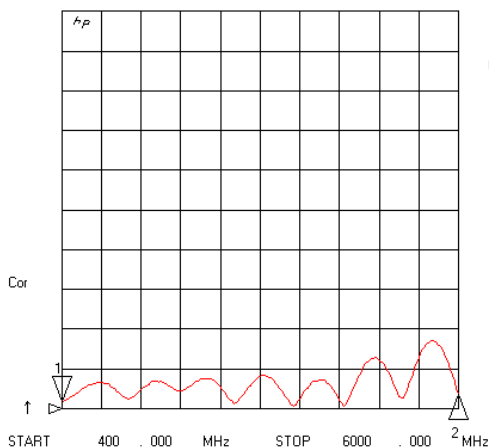

CH3 LOG 5 dB / REF -40 dB
S21 1 : -30.900 dB .400 000 000 GHz

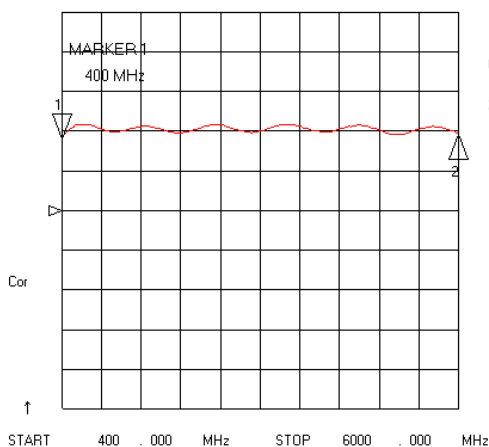

CH2 LOG 1.5 dB / REF -30 dB
S21 1 : -30.783 dB .400 000 000 GHz

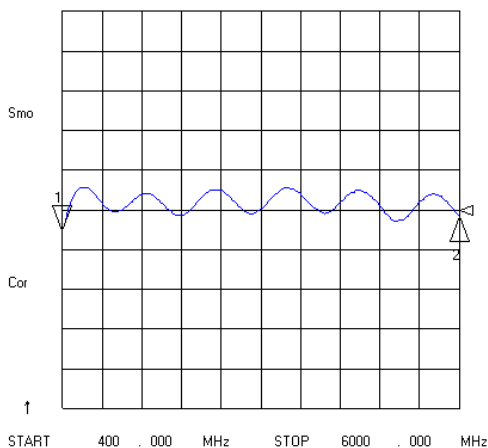

CH4 SWR 100 m / REF 1
S22 1 : 1.0276 .400 000 000 GHz

