

Part No: TC-0460-10N

10dB Coupling

ELECTRICAL:


Frequency Range:	400-6000MHz
Coupling:	10dB ± 1.5 dB
Insertion Loss:	1.5db max
Directivity:	≥ 12 dB
VSWR:	1.5Max
Power Handling:	≤ 30 Watt
Impedance:	50 OHMS

MECHANICAL :

Temperature Range:	-40 ° C - +80 ° C
Connectors:	N-Female
Relative Humidity:	0 ~ 90%


Outline Drawing:

Unit: mm/IN

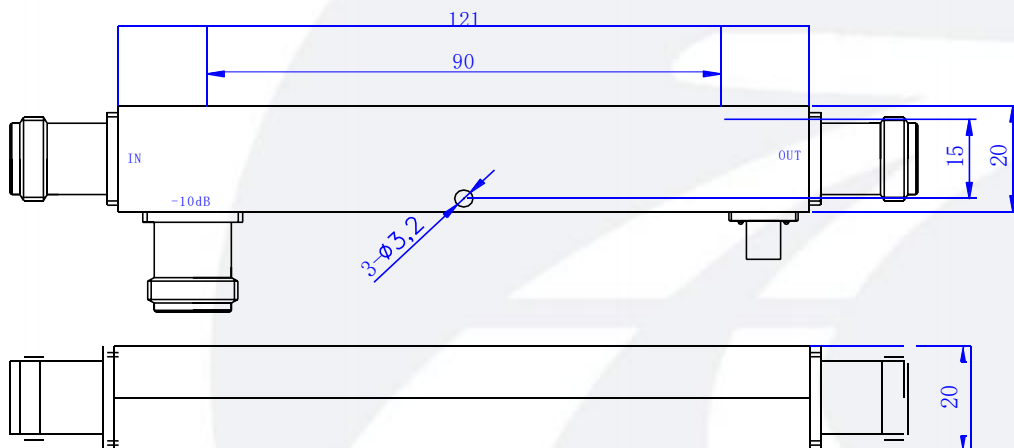

20 Nov 2019 05:14:06


CH1 SWR 100 m / REF 1
S11 1 : 1.0758 : 400 000 000 GHz

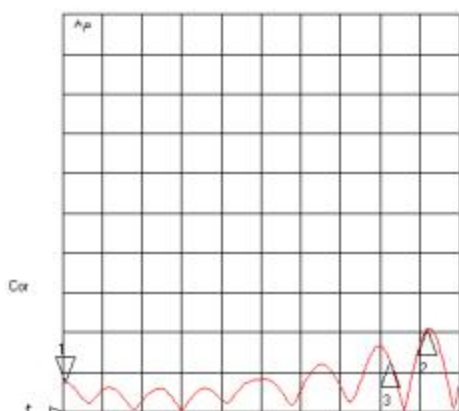

CH1 Markers
2 : 1.075
6.0000 GHz
3 : 1.127
5.4266 GHz

START 350.000 MHz STOP 6500.000 MHz


CH3 LOG 10 dB / REF -22 dB
MEM 1 : 37.229 dB : 400 000 000 GHz

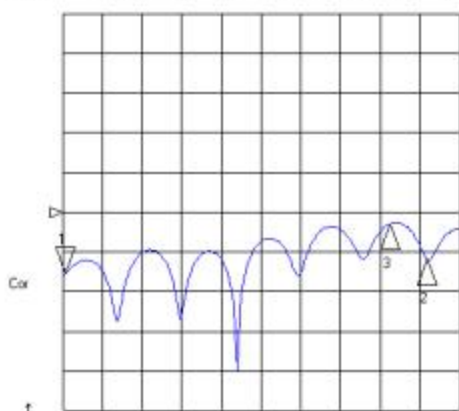

CH3 Markers
2 : 3.017 dB
6.0000 GHz
3 : 3.914 dB
5.4266 GHz

START 350.000 MHz STOP 6500.000 MHz
2002-1-1 01:25:55


CH2 LOG 1.5 dB / REF -10 dB
S21 1 : 11.037 dB : 400 000 000 GHz

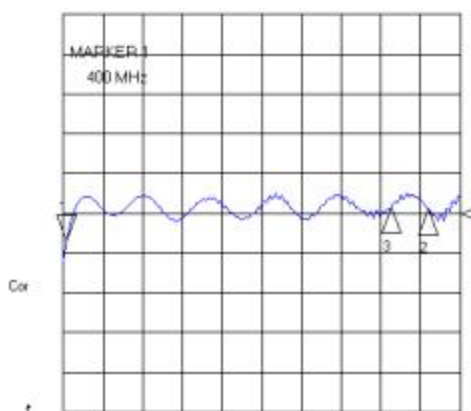

CH2 Markers
2 : 9.8430 dB
6.0000 GHz
3 : 9.7840 dB
5.4266 GHz

START 350.000 MHz STOP 6500.000 MHz

CH4 SWR 100 m / REF 1
S22 1 : 1.0309 : 400 000 000 GHz

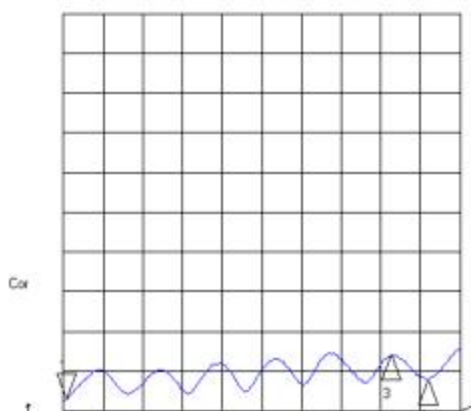

CH4 Markers
2 : 1.006
6.0000 GHz
3 : 1.1415
5.4266 GHz

START 350.000 MHz STOP 6500.000 MHz