

Part No.: TC-05265-20S

20dB Directional Coupler SMA -Female 50Ω 0.5-26.5 GHz

Electrical:

Frequency Range: 0.5-26.5 GHz

Coupling:: 20 ± 1.5 db

Insertion Loss: 1.8db typ, 2.5db max

Directivity: : 12db typ, 10db min

VSWR: 1.7 max

Power Handling: 30 Watt

Impedance: 50 OHMS

Mechanical:


Temperature Range: $-45^{\circ}\text{C} - +85^{\circ}\text{C}$





Connectors: SMA-Female

Relative Humidity: 0 ~ 90%


Outline Drawing:

Unit: mm

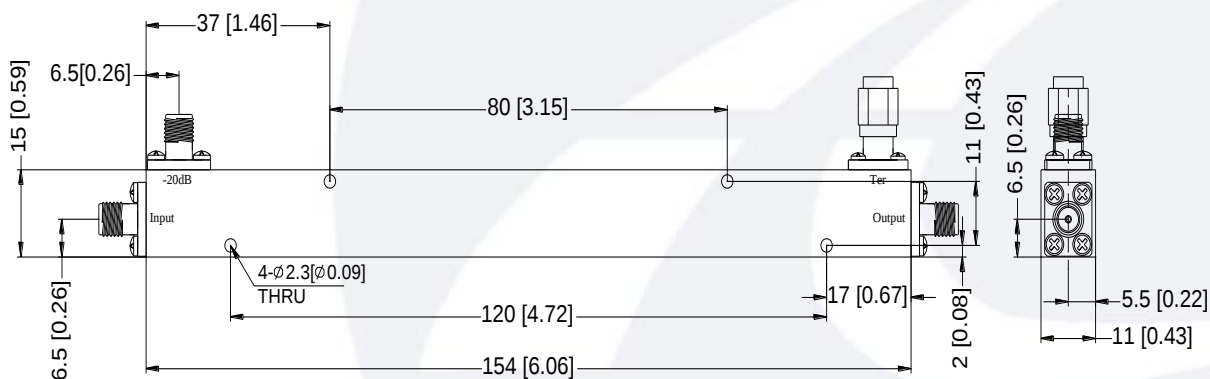

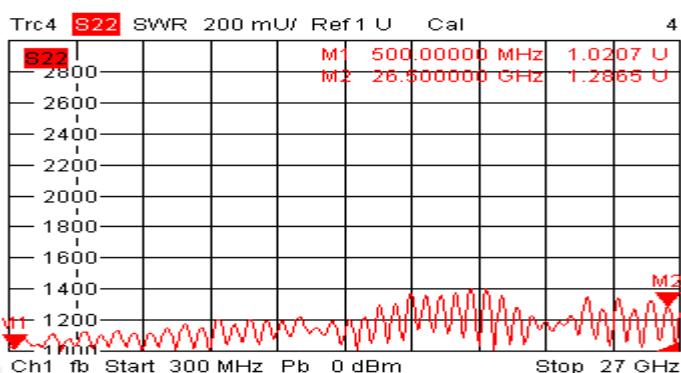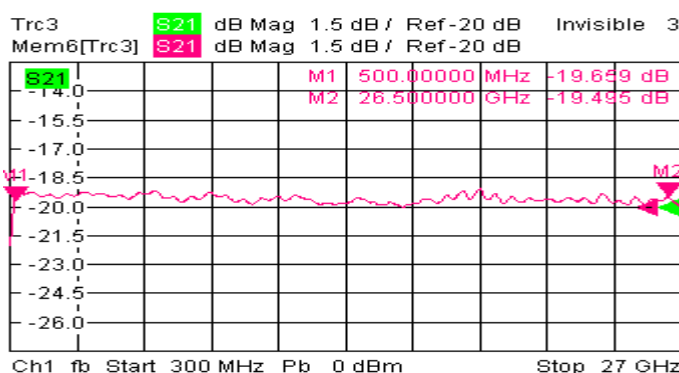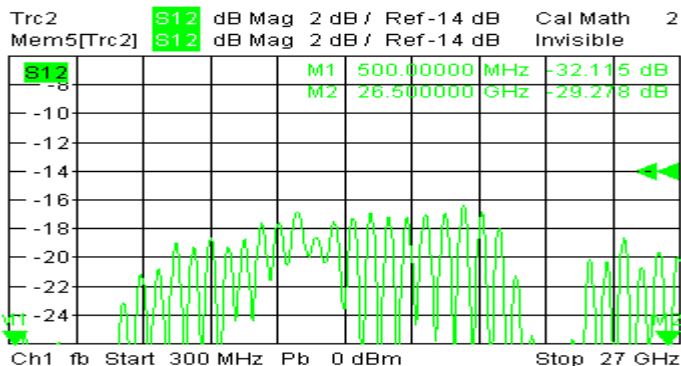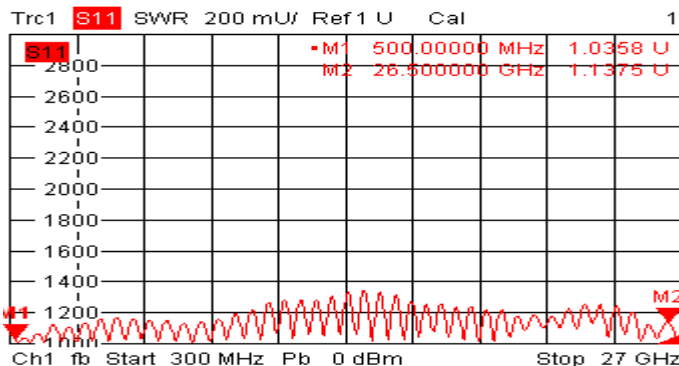

2/26/2020, 5:26 AM

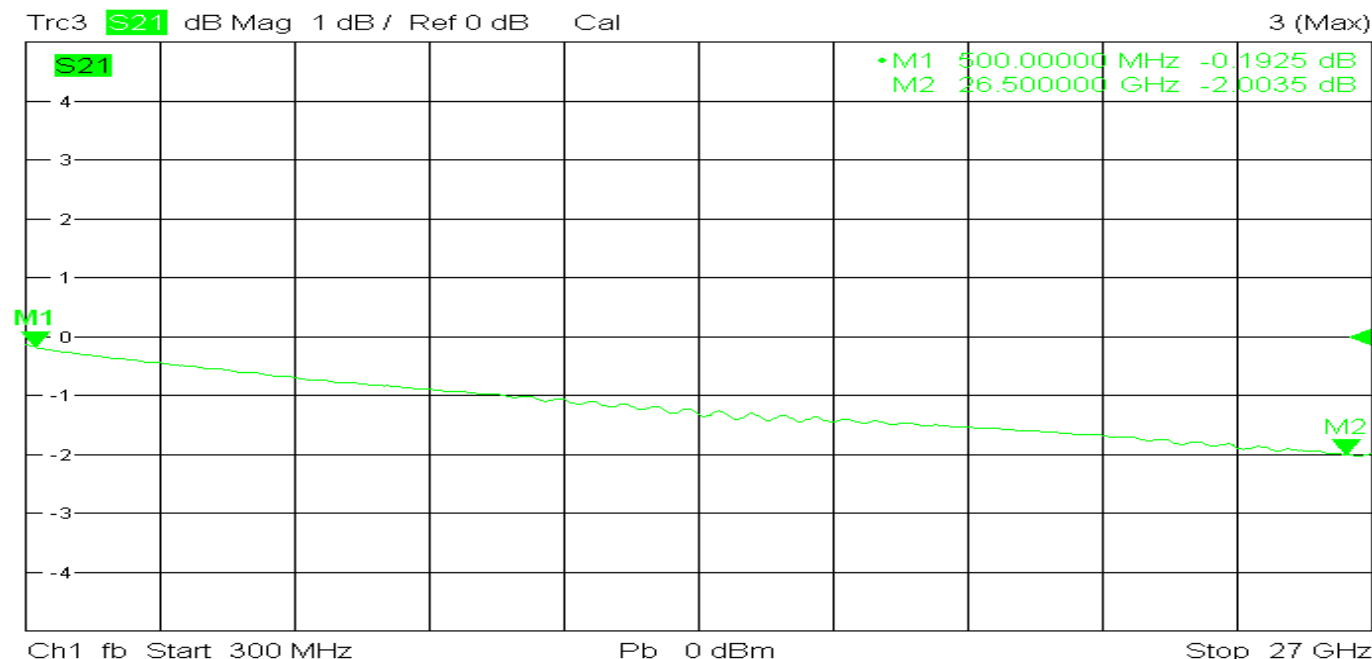

2/26/2020, 5:29 AM