

Absorptive, Broadband MMIC Switch

9K-8GHz/SPDT/ SMA Female/Phase matched

Model: TLSPDT9K8GA-PM

The TLSPDT9K8GA-PM is an absorptive MMIC switch with a TTL driver that operates between 9K and 8 GHz. The SPDT switch offers 50 dB port-to-port isolation with a typical switching speed of 50 ns. The input and output connectors of the switch are SMA female.

Features:

- Frequency range: 9KHz-8GHz
- Low Insertion Loss: 1.5 dB
- Power Handling : 27dBm
- High Isolation
- Switch Type: Absorptive
- Phase Matched

Applications:

- Communication Systems
- Automatic Test Equipment
- Switching Network

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	9KHz-8GHz			
Insertion Loss		1.5	2	dB
Isolation		50		dB
Switch Speed		50	100	ns
Input VSWR		1.5	2	:1
Output VSWR		1.5	2	:1
Power Handling			27	dBm
DC Voltage		5		V DC
DC Supply Current		10		mA
Switch type	Absorptive			
Impedance	50			Ohms


Absolute Maximum Ratings :

Description	Parameter	Units
Supply Bias Voltage	±5%	V
RF Input Power	27	dBm
ESD sensitivity (HBm)	Class 0, passed 150V	

Mechanical Specifications:

Description	Parameter	Units
Input /Output Connector	SMA Female/SMA Female	
Control Bias	Solder Pin	
Size	24*17*10.2	mm

Outline Drawing: Unit:mm

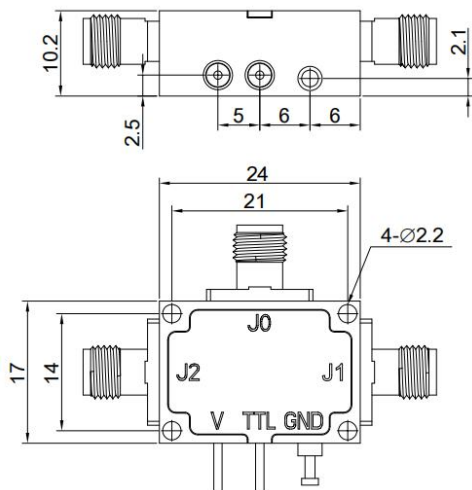

1.Dimensions are in mm

2.Tolerances: Outline drawing ± 0.2 [0.008] Hole ± 0.2 [0.008]

NOTE: ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME

Regulatory Compliance:



Truth Table	
TTL Control Input	Signal Path State
0	J0-J1
1	J0-J2

TTL Control Voltages & VDD	
Stage	Bias Condition
VDD	+5V (± 5%)
Low (0)	0 to 0.8Vdc
High (1)	+3.3 to +5.0Vdc



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:


Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+65	°C
Non-operating Temperature	-45		+85	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Base Number	Description	Revision
TLSPDT9K8GA-PM	Absorptive,Broadband MMIC Switch 9KHz-8 GHz,SPDT,SMA	Rev.1.1

Typical Performance Data:


Insertion Loss&VSWR vs Frequency

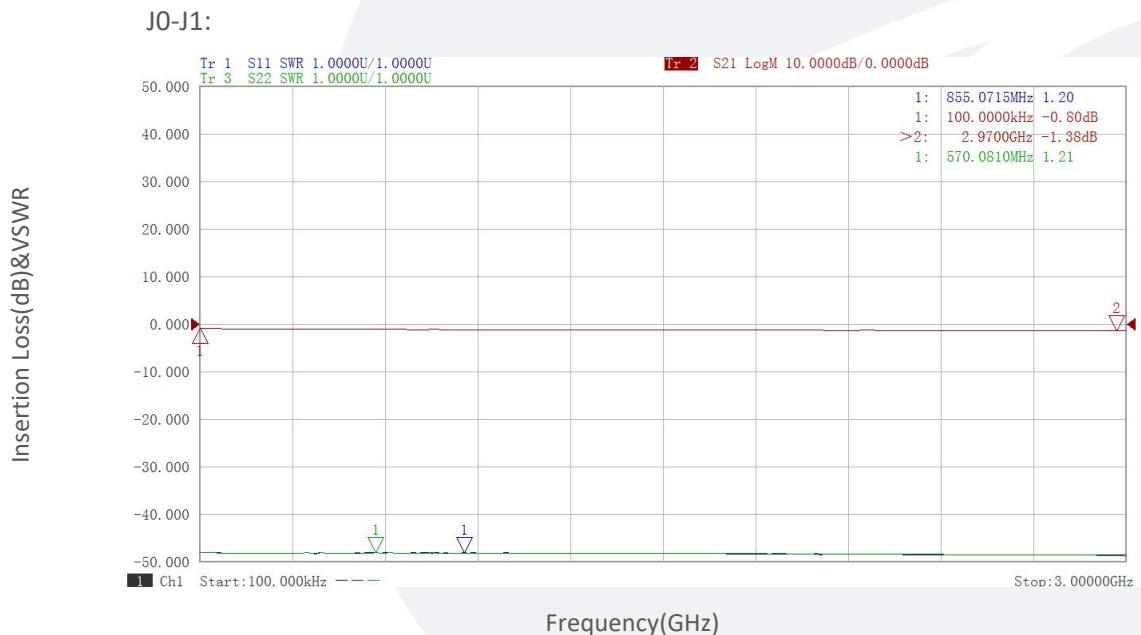


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

Isolation vs Frequency

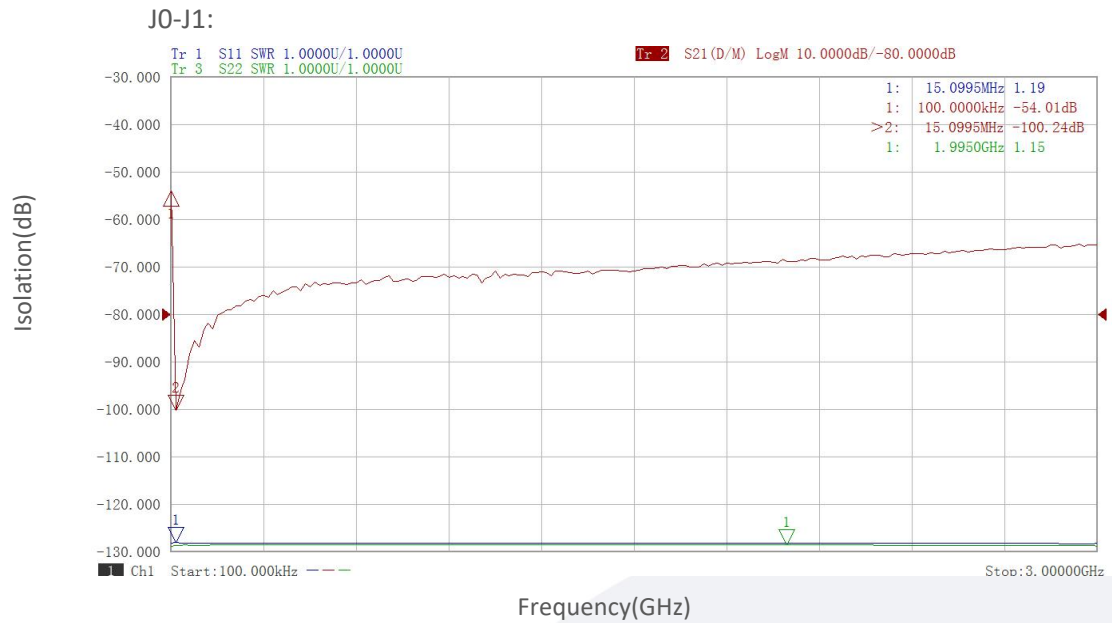


Insertion Loss&VSWR vs Frequency

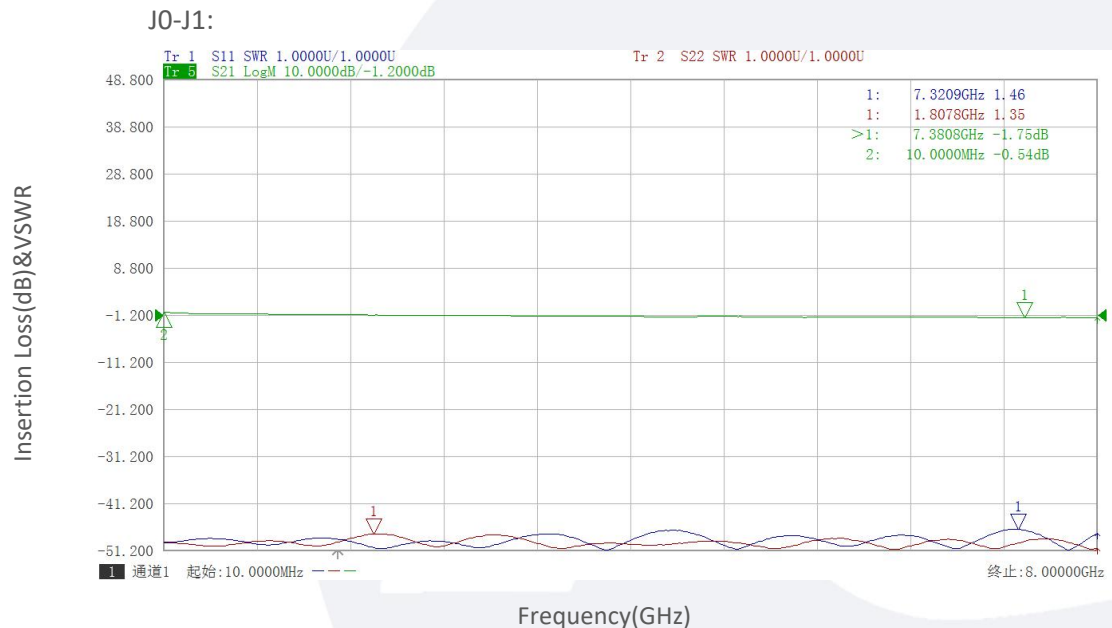


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

Isolation vs Frequency

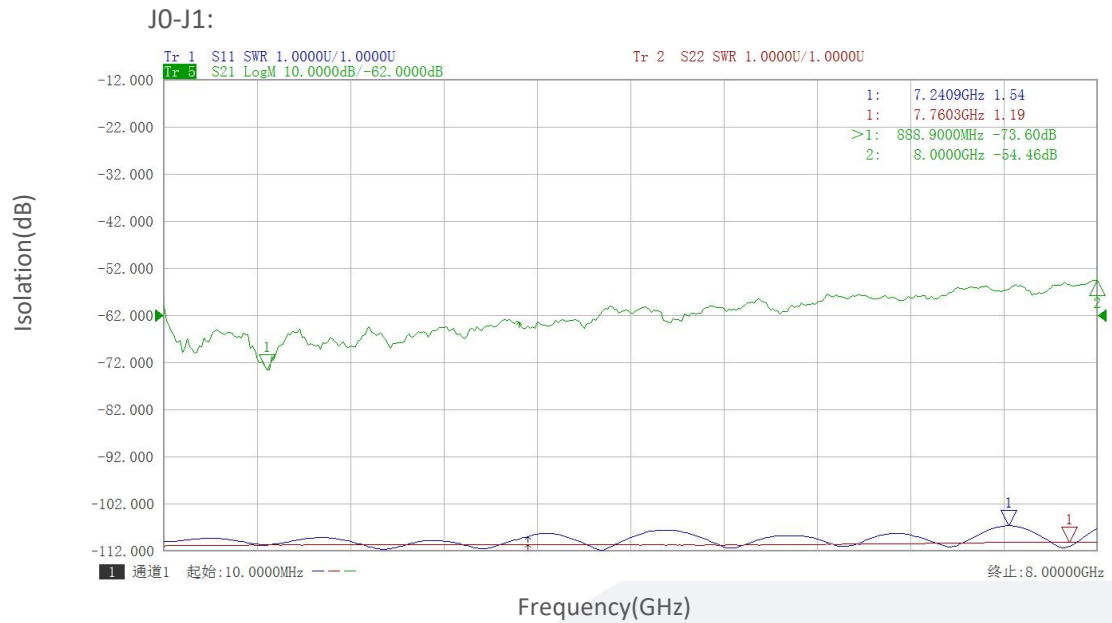


Insertion Loss&VSWR vs Frequency

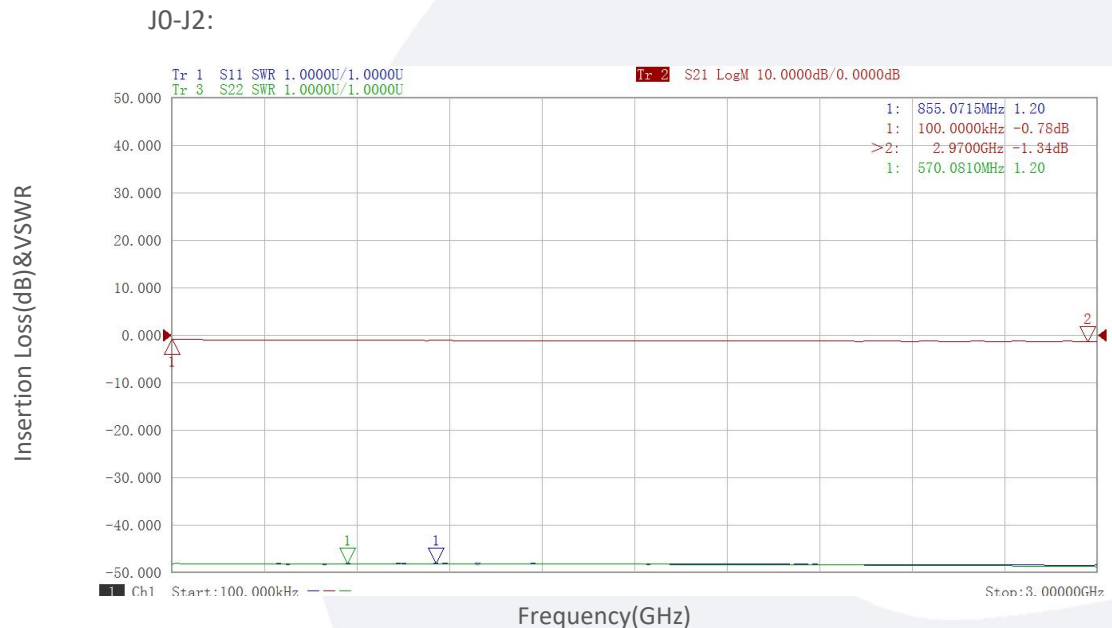


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

Isolation vs Frequency

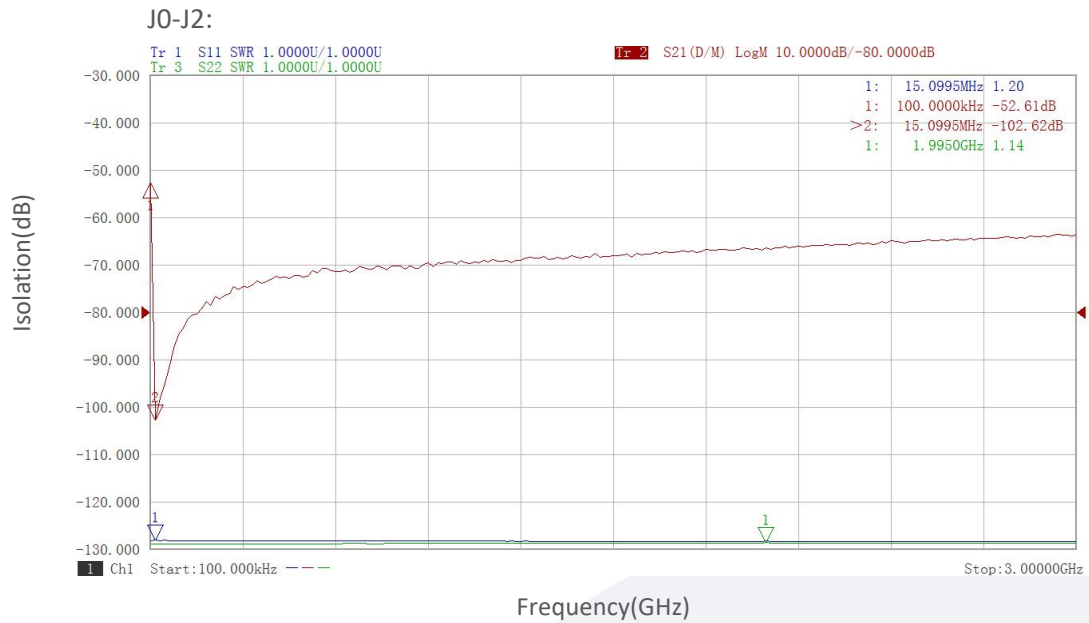


Insertion Loss&VSWR vs Frequency

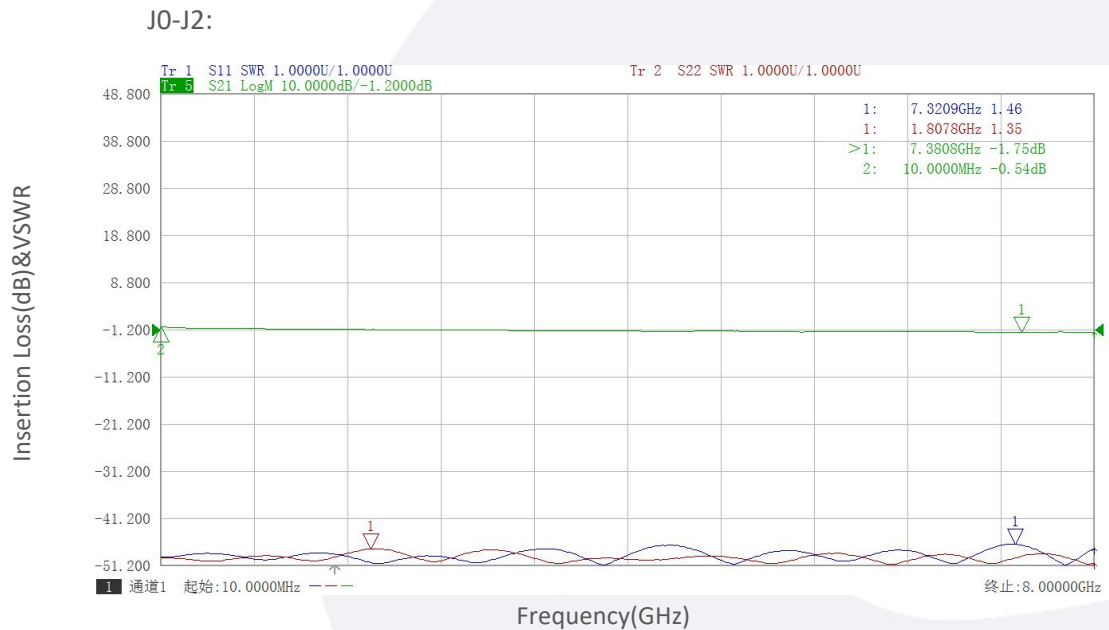


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

Isolation vs Frequency

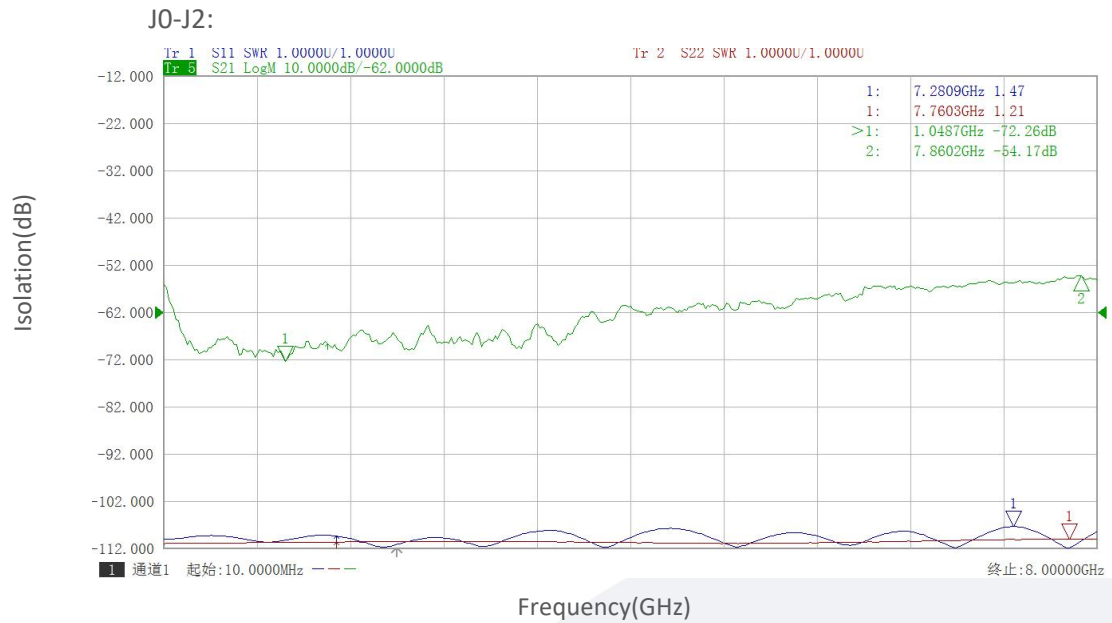


Isolation vs Frequency

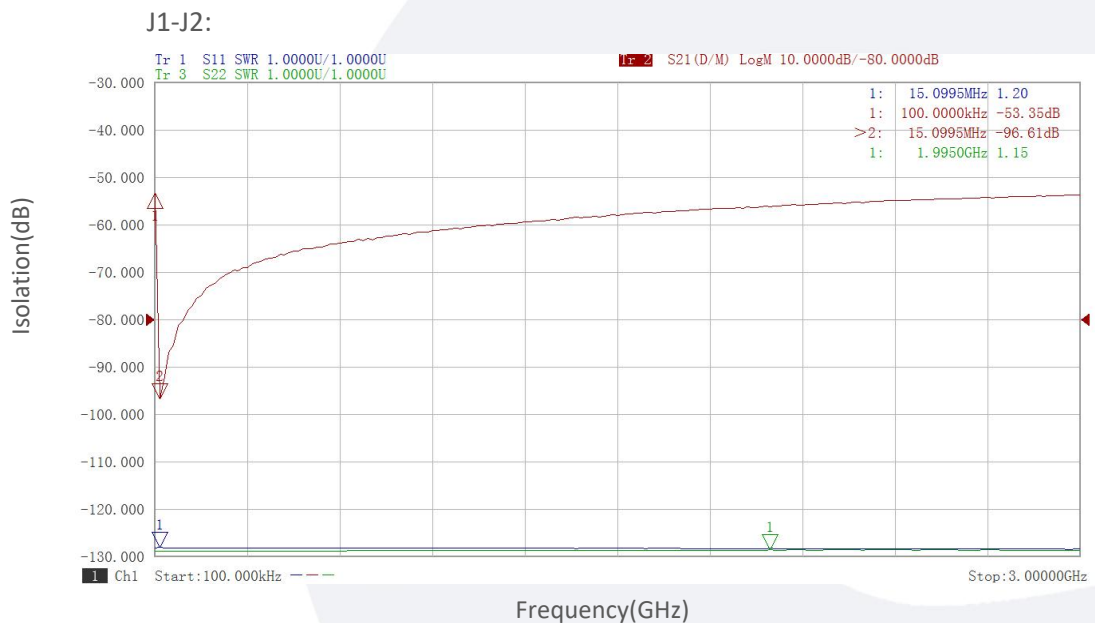

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

Isolation vs Frequency

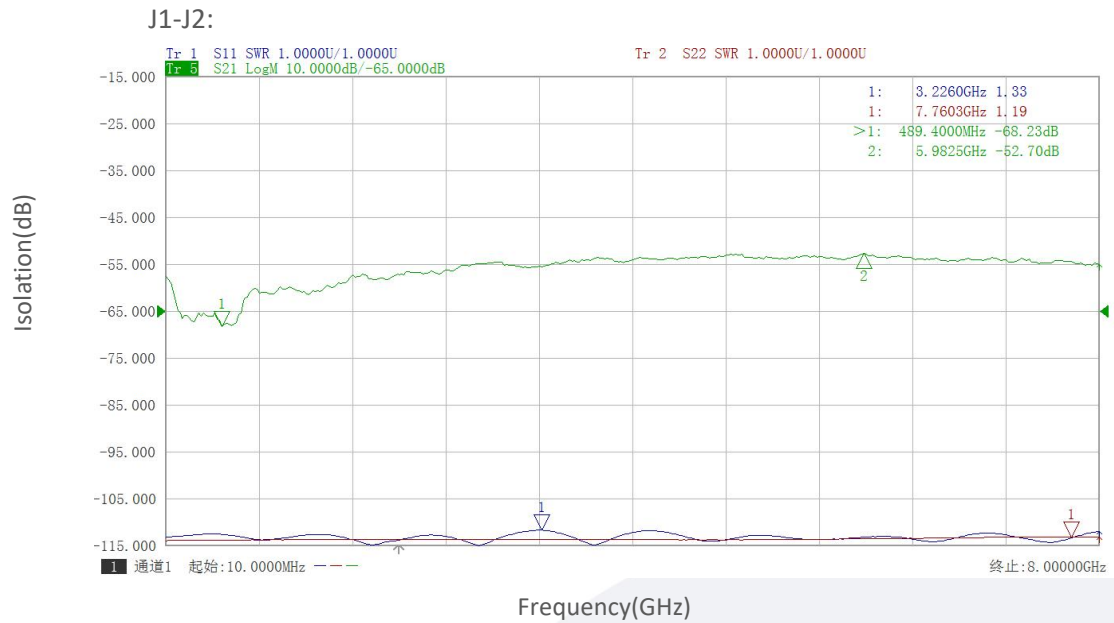

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.