

Part No.: TC-1040-30S

30dB Directional Coupler SMA- Female 50Ω 1000-4000MHz

Electrical:

Frequency Range: 1000-4000MHz

Coupling: $30 \pm 1.0\text{dB}$

Insertion Loss: $\leq 0.3\text{dB}$

VSWR: $\leq 1.25:1$

Directivity: $\geq 20\text{dB}$

Power Handling: 30Watt

Impedance: 50Ω



Mechanical:


Temperature Range: $-40^{\circ}\text{C} - +80^{\circ}\text{C}$





Connectors: SMA-Female

Relative Humidity: 0 ~ 90%


Outline Drawing:

Unit: mm

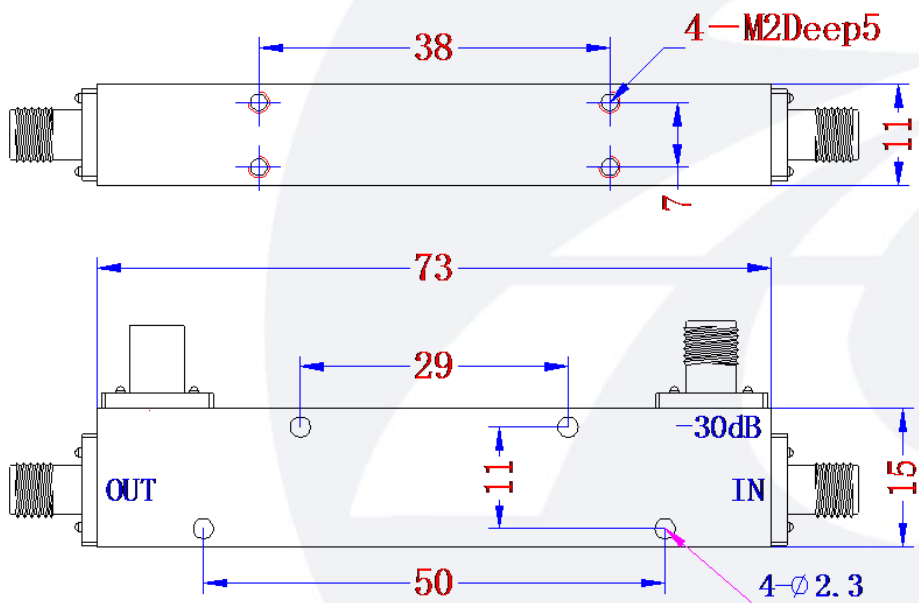

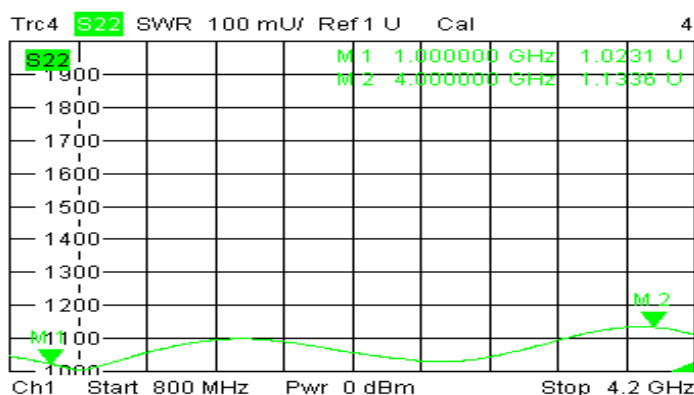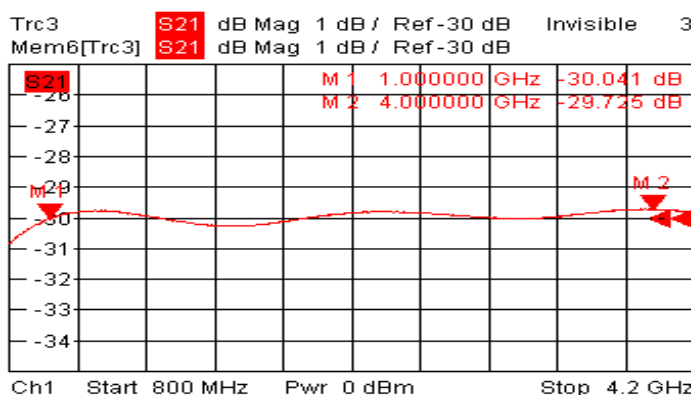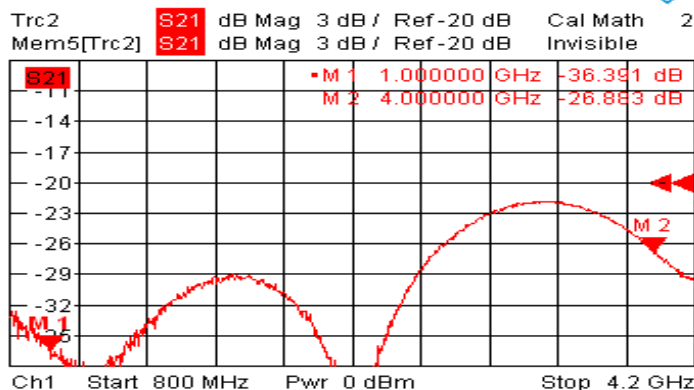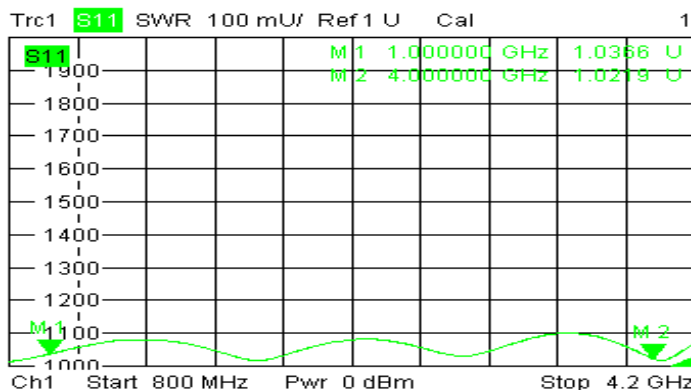

7/5/2019, 11:05 AM

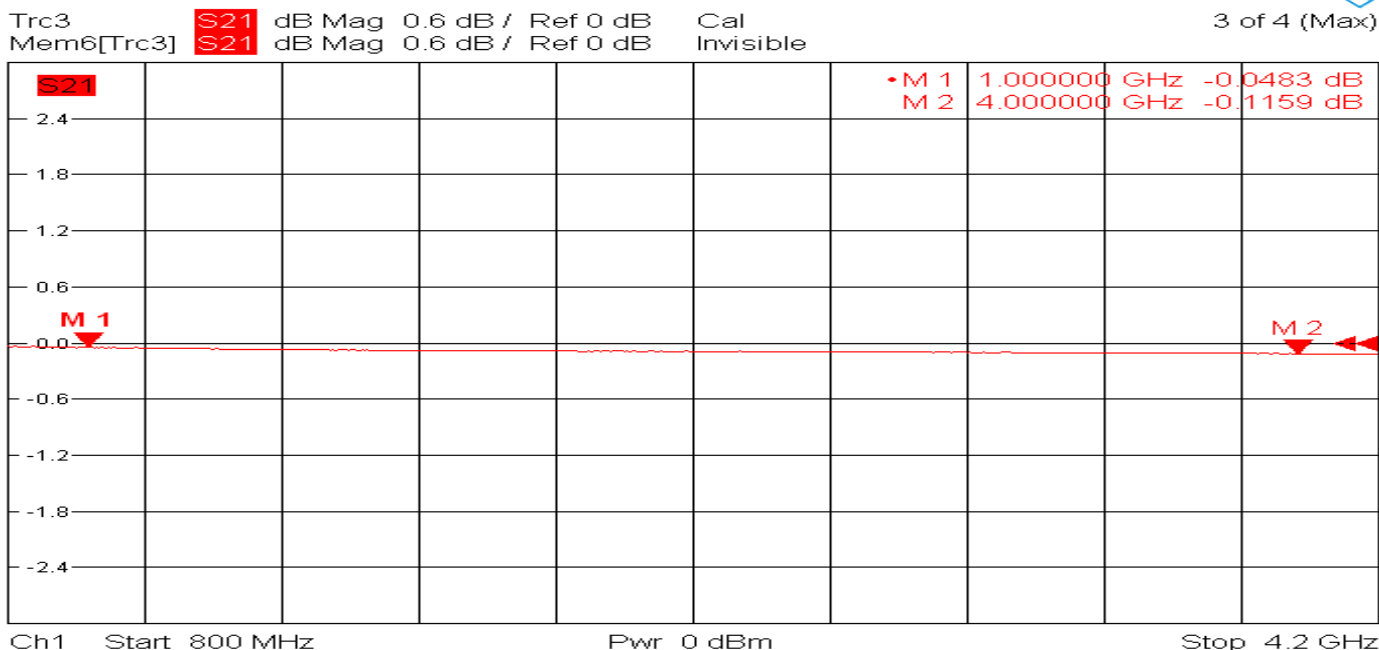

7/5/2019, 11:18 AM