

Part No.: TC-2080-10S

10dB Directional Coupler SMA- Female 50Ω 2000-8000MHz

Electrical:

Frequency Range: 2000-8000MHz

Coupling: $10 \pm 1.0\text{dB}$

Insertion Loss: $\leq 0.8\text{dB}$

VSWR: $\leq 1.3:1$

Directivity: $\geq 20\text{dB}$

Power Handling: 30Watt

Impedance: 50Ω



Mechanical:


Temperature Range: $-40^{\circ}\text{C} - +80^{\circ}\text{C}$





Connectors: SMA-Female

Relative Humidity: 0 ~ 90%

Outline Drawing:

Unit: mm

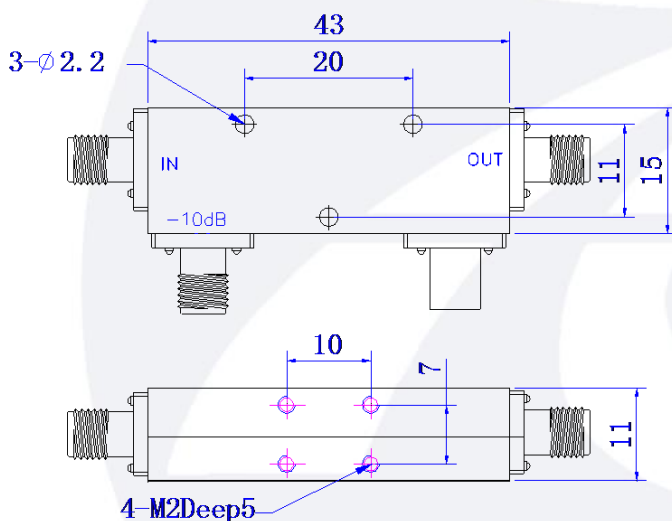

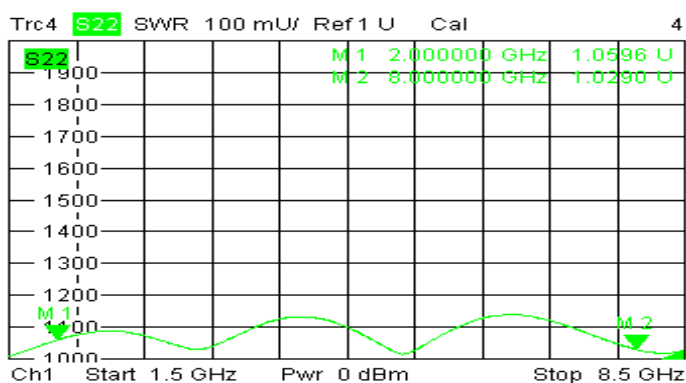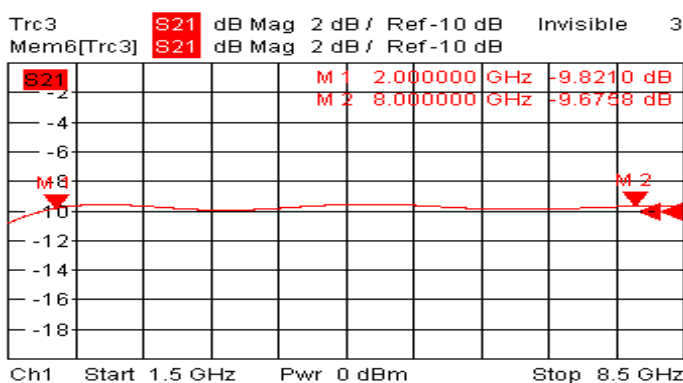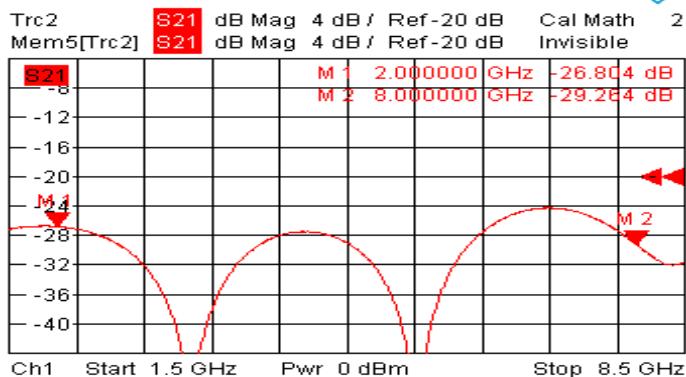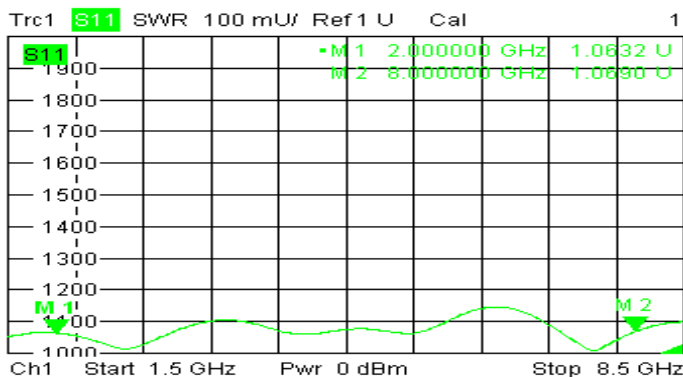


4/15/2020, 2:24 PM



Trc3 **S21** dB Mag 1 dB / Ref 0 dB Cal

Mem6[Trc3] **S21** dB Mag 1 dB / Ref 0 dB Invisible

3 of 4 (Max)

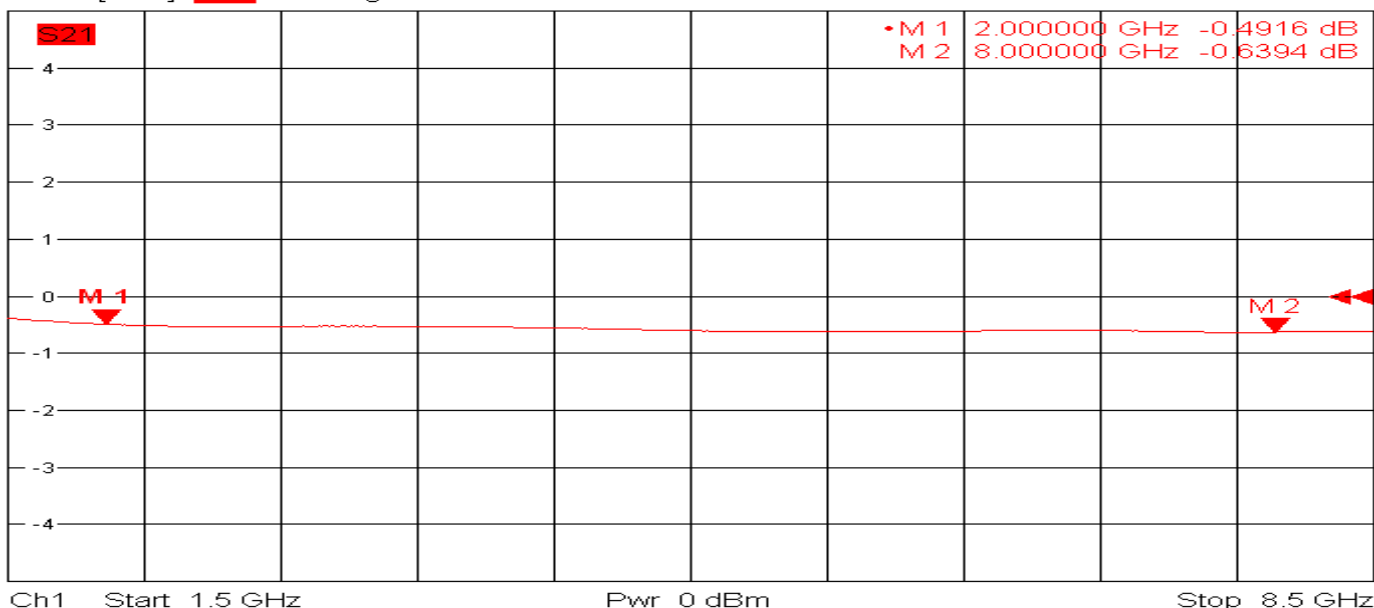

4/15/2020, 3:11 PM