

Part No.: TC-2080-20S

20dB Directional Coupler SMA- Female 50Ω 2000-8000MHz

Electrical:

Frequency Range: 2000-8000MHz

Coupling: $20 \pm 1.0\text{dB}$

Insertion Loss: $\leq 0.4\text{dB}$

VSWR: $\leq 1.3:1$

Directivity: $\geq 20\text{dB}$

Power Handling: 30Watt

Impedance: 50Ω



Mechanical:


Temperature Range: $-40^{\circ}\text{C} - +80^{\circ}\text{C}$

Connectors: SMA-Female

Relative Humidity: 0 ~ 90%


Outline Drawing:

Unit: mm

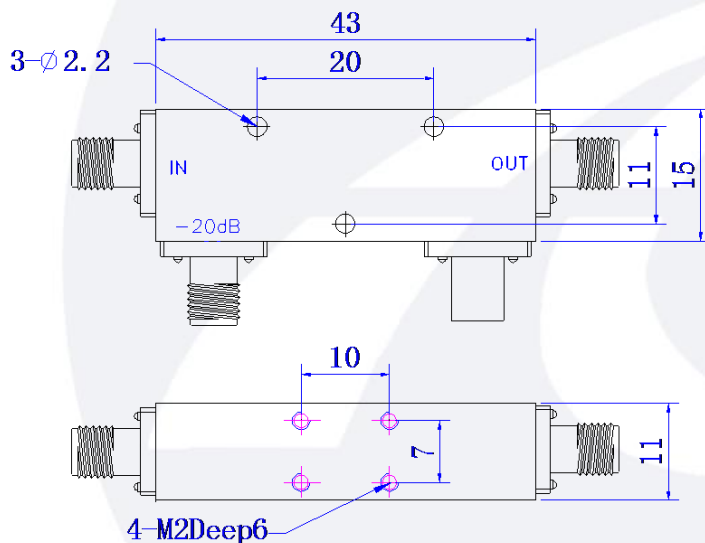


9 Nov 2019 08:11:44


CH1 SWR 100 m / REF 1
S11 2 : 1. 1498 7. 998 720 000 GHz

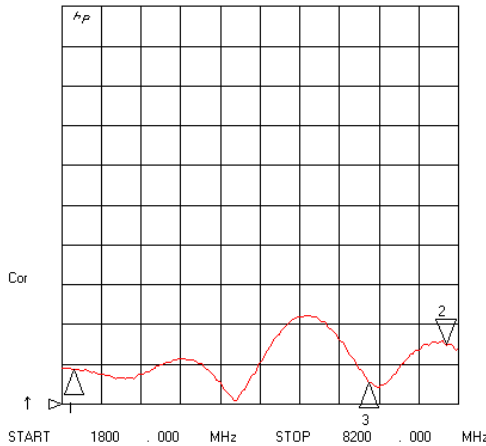

CH3 LOG 5 dB / REF -40 dB
MEM 2 : -45 . 060 dB 7. 998 720 000 GHz

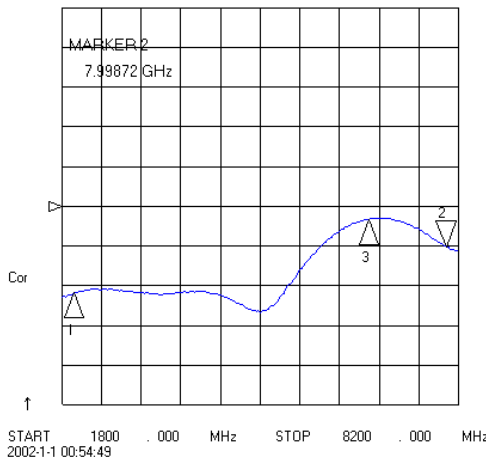

CH2 LOG 1 dB / REF -20 dB
S21 2 : -19 . 865 dB 7. 998 720 000 GHz

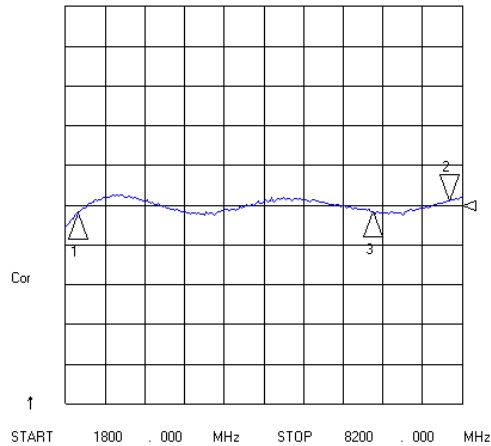

CH4 SWR 100 m / REF 1
S22 2 : 1. 0339 7. 998 720 000 GHz

