

Part No.: TC-2080-30S

30dB Directional Coupler SMA- Female 50Ω 2000-8000MHz

Electrical:

Frequency Range: 2000-8000MHz

Coupling: $30 \pm 1.0\text{dB}$

Insertion Loss: $\leq 0.3\text{dB}$

VSWR: $\leq 1.3:1$

Directivity: $\geq 20\text{dB}$

Power Handling: 30Watt

Impedance: 50Ω



Mechanical:


Temperature Range: $-40^{\circ}\text{C} - +80^{\circ}\text{C}$

Connectors: SMA-Female

Relative Humidity: 0 ~ 90%


Outline Drawing:

Unit: mm

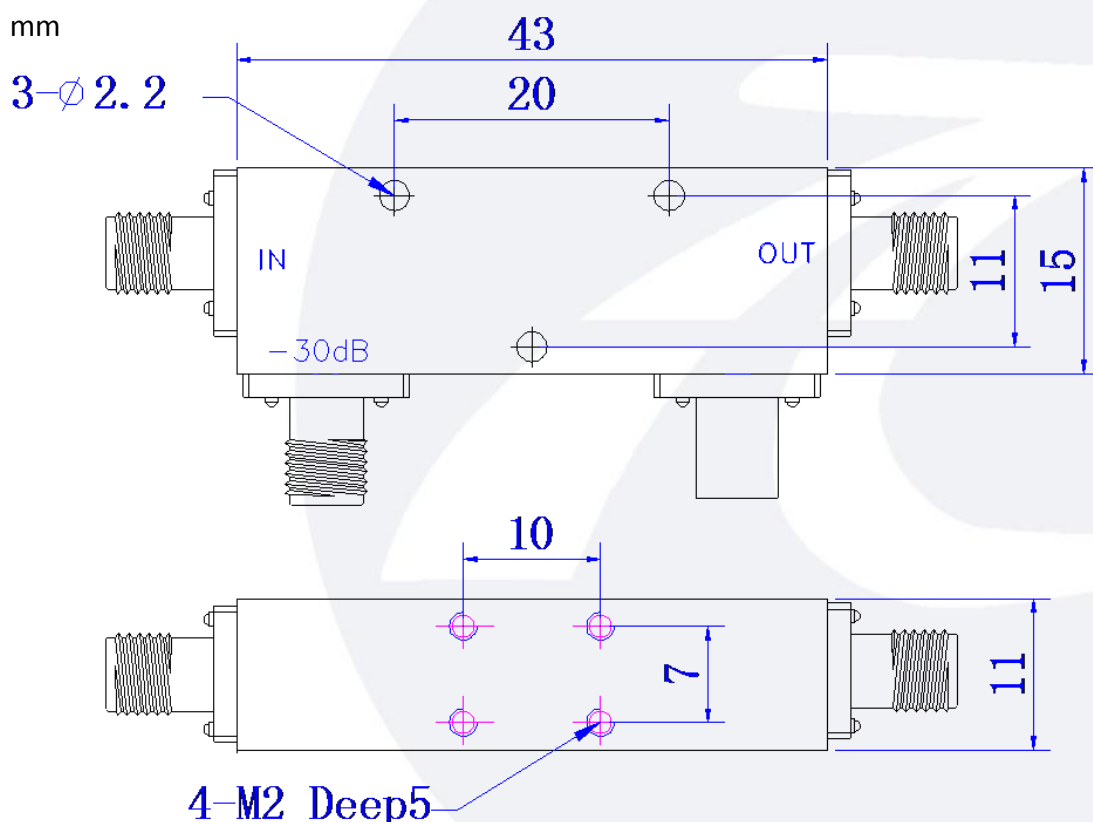


20 May 2020 08:53:01


CH1 SWR 100 m / REF 1
S11 1 : 1.0442 2.000 000 000 GHz

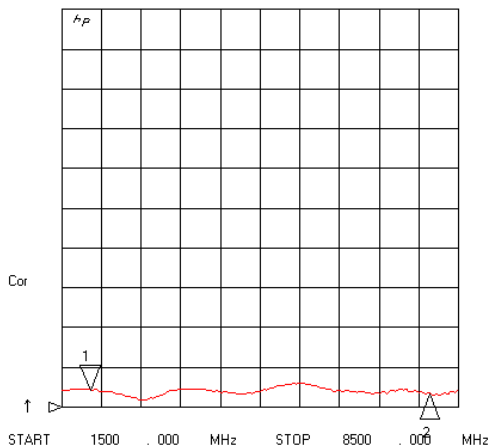

CH3 LOG 5 dB / REF -50 dB
MEM 1 : -58.698 dB 2.000 000 000 GHz

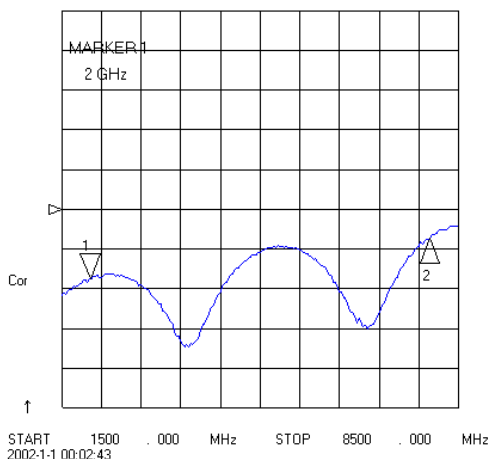

CH2 LOG 1 dB / REF -30 dB
S21 1 : -30.101 dB 2.000 000 000 GHz

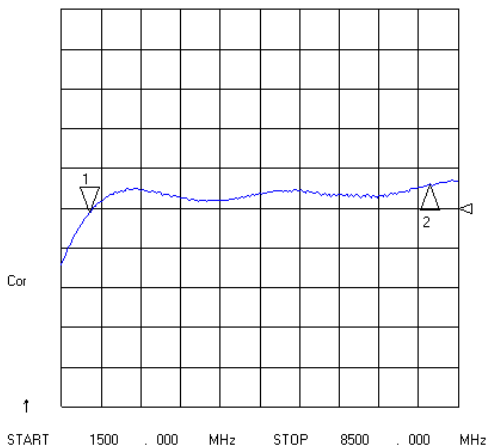

CH4 SWR 100 m / REF 1
S22 1 : 1.0240 2.000 000 000 GHz

