

Part No.: TC-80120-20S

20dB Directional Coupler SMA-Female 50Ω 8G-12G

Electrical:


Frequency Range: 8-12 GHz
Coupling: $20 \pm 1.0\text{db}$
Insertion Loss: 0.4db typ, 0.5db max
Directivity: 15db typ, 14db min
VSWR: 1.4 max
Power Handling: 50 Watt
Impedance: 50 OHMS





Mechanical:

Temperature Range: $-45^{\circ}\text{C} - +85^{\circ}\text{C}$
Connectors: SMA-Female
Relative Humidity: 0 ~ 90%


Outline Drawing:

Unit: mm

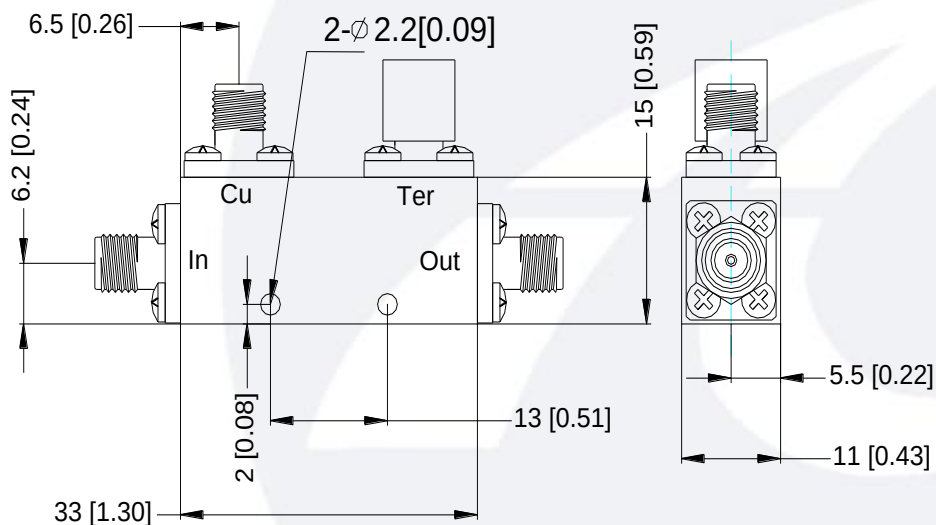

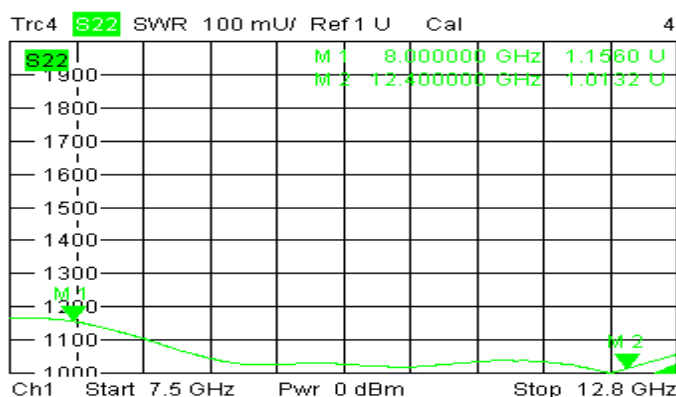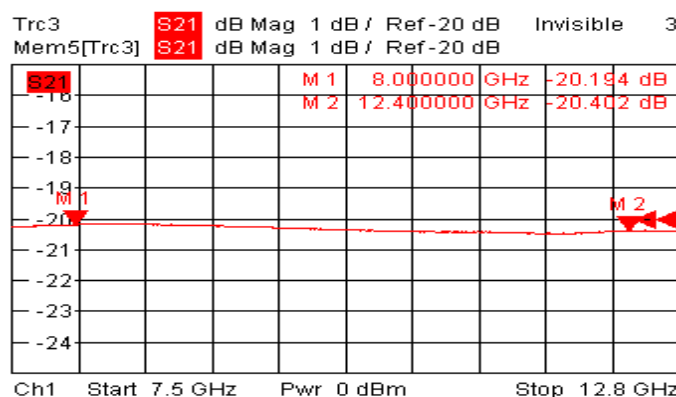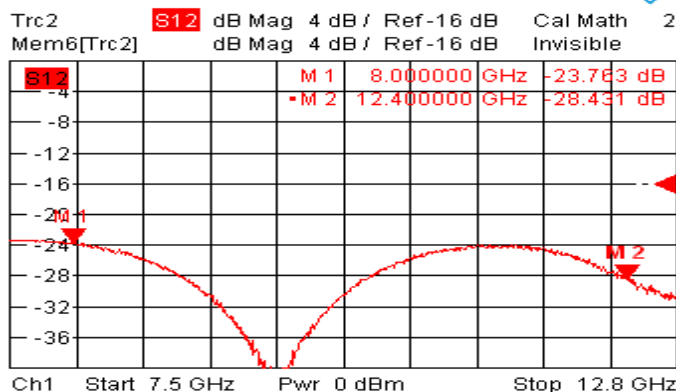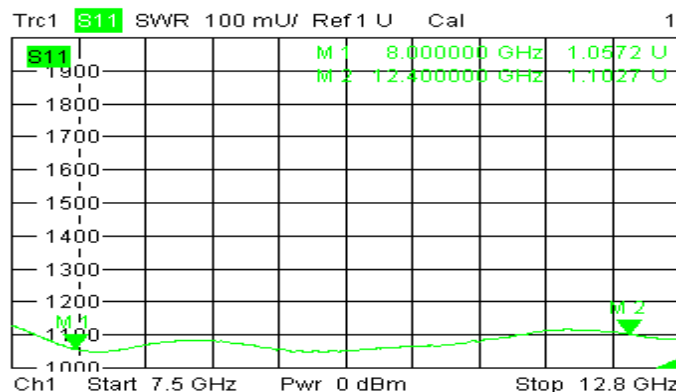

10/12/2019, 11:40 AM

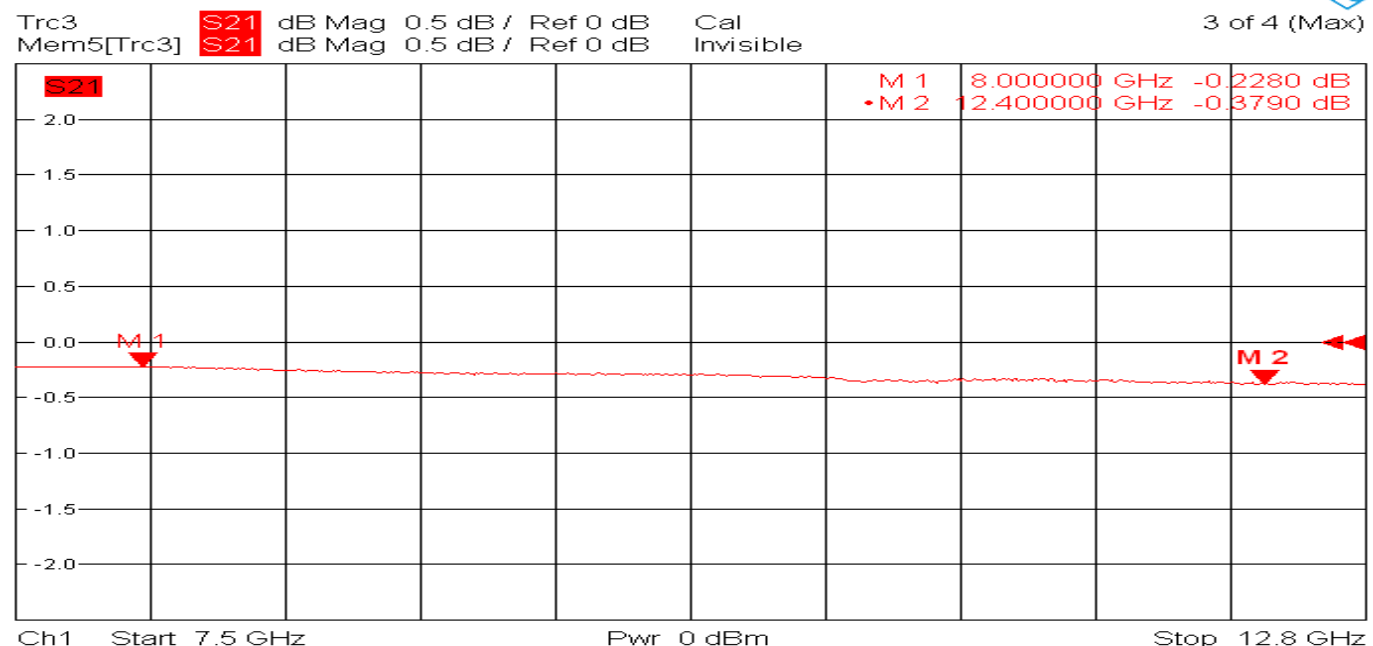

10/12/2019, 11:44 AM